60 x 34 x 84 (1525 x 865 x 2135) • Fax on Demand #4003

STANDARD MODEL #60ACTS
STEAM MODEL #S60ACTS



AQUATIC ADVANTAGE

- National distribution
- 5 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

COLOR & TRIM OPTIONS

Stock	Premium
Almond	Black
Bone	Cashmere
Linen/Biscuit	Mexican Sand
Sterling Silver	Red
White	Sandbar

FEATURES

- Decorative back wall
- Molded toiletry shelves
- Integral acrylic grab bar
- Slip-resistant floor
- LH or RHdrain
- Lucite cast acrylic surface
- Limited 5-year warranty
- Steam System (S60ACTS)
- Pre-plumbed steam generator
- Steam outlet: Chrome
- Steam door: Chrome w/ Clear or Obscure glass
- Electronic control
- Aromatherapy
- Dome light
- Brass drain with stainless steel cover

OPTIONS

- Designer drain waste & overflow:
 Bone, Brushed Nickel, Polished
 Brass, Polished Chrome,
 Oil-Rubbed Bronze,
 Polished Brass
- Dome light (standard on steam models)
- Shower door series: LO516








Acrylic Showers • Fax on Demand #4003



60ACTS

60 x 34 x 84 (1525 x 865 x 2135) inches (mm)



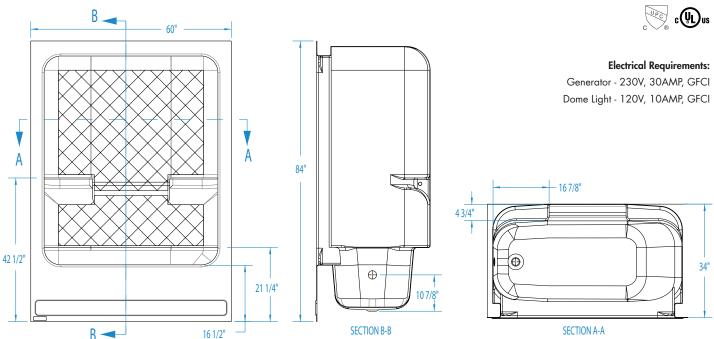

FEATURES Ibs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.


Type and Model #	Material	Wall Finish	Pieces	Drain	Seats	Lights	Pkg. Wt.
Tub-Shower #60ACTS	Acrylic	Decorative back wall	1	LH or RH	-	Optional	175 (79)
Steam Tub-Shower #S60ACTS	Acrylic	Decorative back wall	1	LH or RH	_	6" Recessed	195 (88)

DIMENSIONS

Specifications	inches (mm)		
Width: Overall / Net	60 (1525)		
Depth: Overall / Net	34 (865) / 34 (865)		
Height: Overall / Net	84 (2135)		
Enclosure Opening	51 ¾ (1315)W × 62 ¾ (1595)H		
Skirt Height	16 ½ (420)		
Drain Rough-In (from Back Wall)	17 ½ (445)		
Drain Rough-In (from Side Wall)	1 3/4 (45)		
Drain: Diameter / Clearance	2 (50) / 2 3/4 (70)		

FRAMING DIMENSIONS inches (mm)

Туре	D Depth	W Width	H Height	A Box-Out	В	С
Alcove	35 (890)	60 1/8 (1525)	_	6 x 12 (150 x 305)	1 ¾ (45)	17 ½ (445)



*Refer to installation instructions for further detail. (domed models)