



ROUGH-IN KITS

- Two Handle Diverter Roman Tub Rough-In Kit
- Flexible Deck or Ledge Mount
- Adjustable Rough-In for Thin or Thick Deck Installations
- Installed Before Mud and Tile Applied in Thick Deck Situation
- Four Hole Installation
- 16" (406 mm) Maximum Widespread (without using additional tubing)
- Temperature and Volume Controlled with Handles
- Trim Kit Must Also be Ordered to Complete Installation


COMPLIES WITH:

- ASME A112.18.1
- CSA B125

ROUGH-IN KIT STANDARD SPECIFICATIONS:

- Washerless.
- Four hole installation.
- 5/8" O.D. copper supply inlet/outlet tubes—R4707 outlet tubes are corrugated copper.
- Widespread with 16" (406 mm) maximum without using additional tubing.
- Flexible deck or ledge mount installation.
- Solid fabricated brass end valves and spout body.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- Temperature and volume controlled with handles.
- All operating parts shall be replaceable from the top.


NOTE: Trim kit must also be ordered to complete installation. Refer to separate trim kit specifications to determine the best kit for your situation.

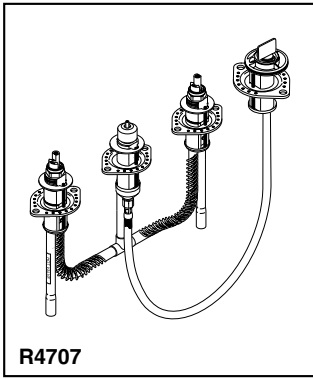

R4707

Submitted Model No.: _____

Specific Features: _____

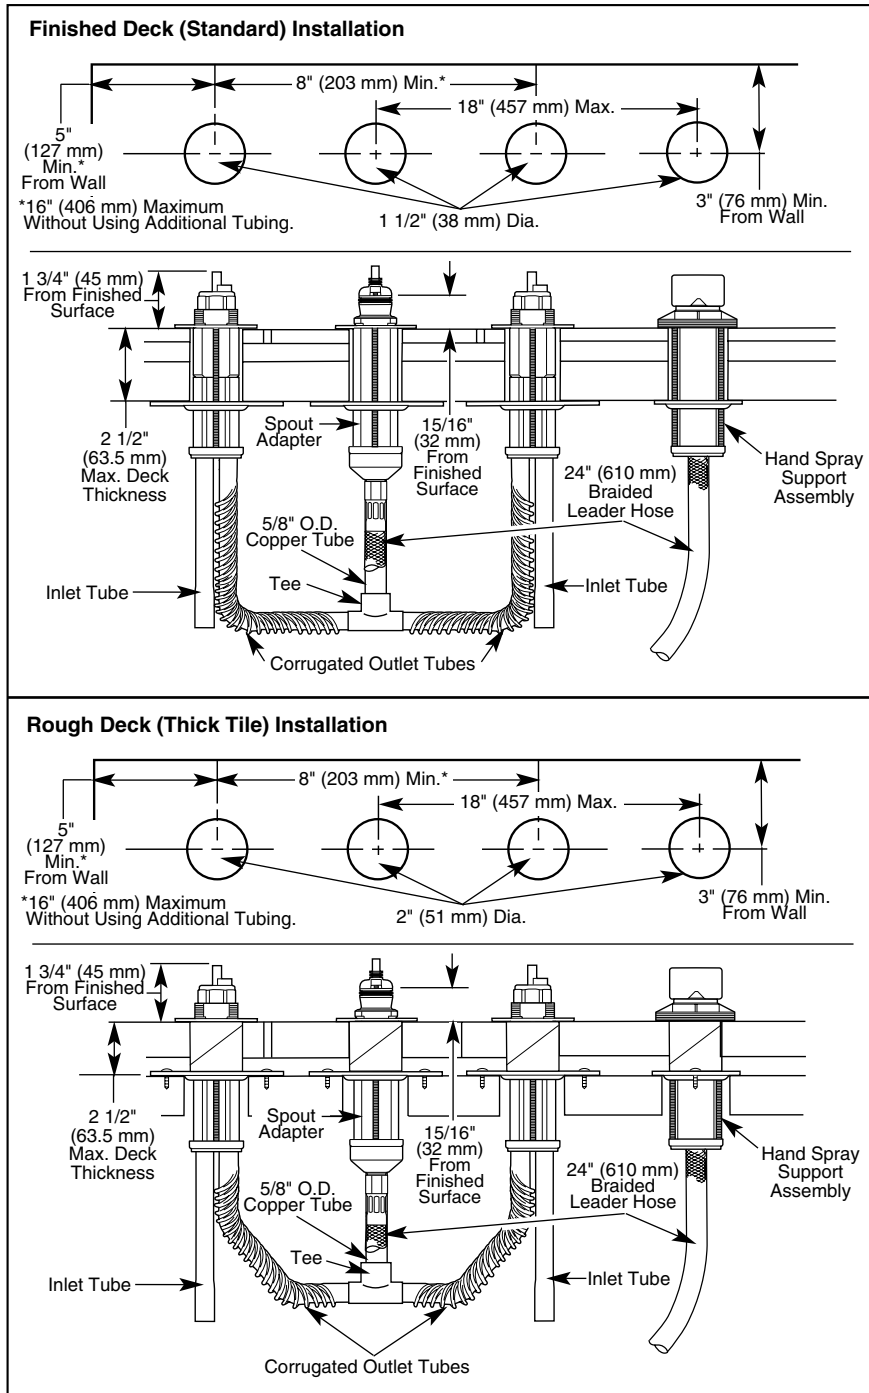

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.



Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2003 Masco Corporation of Indiana

DSP-B-R4707