

IN2ITION®

- 2-In-1 Shower
- 2.5 GPM Max @ 80 PSI (Each Device)
- Certified Dual Check Valves

Submitted Model No.: _____

Specific Features: _____

58045▲ Showerhead

58065▲ Showerhead

STANDARD SPECIFICATIONS:

- Easy installation on existing shower arm or using included shower arm and flange.
- Integrated handshower docks securely into showerhead when not in use.
- Multiple handshower spray settings and pause feature.
- Six foot tangle free hose.

WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆

◆ Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3, CSA B125.1 and ASME A112.18.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

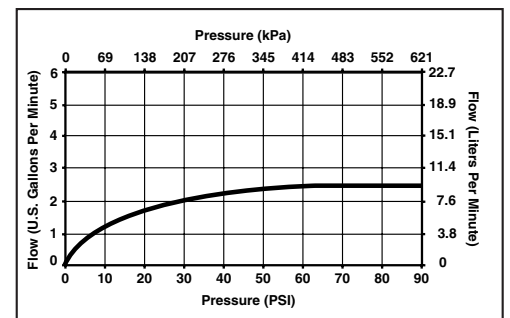

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-B-58045 REV. A



55 E 111th Street, Indianapolis, Indiana 46280
 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2
 © 2010 Masco Corporation of Indiana