Models 9004/9104/9204 Baywood 5.0™

Ariance® Rectangular Air Massage Bath



Features ____

- 60" x 36" x 19-3/4" Rectangular air massage bath
- Three advanced therapy air bath systems
- Multifunctional digital controller
- Chromatherapy system Seven healing light settings with a full spectrum sequencing mode
- PerfectBack[™] Multiple soothing recessed back jets with heated neck/back rest
- Heated SilentAir[™] system
- QuickDrain[™] channel system and automatic purge system
- Color-Match trim for air jets Optional finishes available
- Cable drain with matching trim (optional)
- Decorative handles
- One pillow
- Removable apron (optional)
- Mansfield® Limited Ten Year Warranty
- Available in standard colors (white, almond, biscuit and bone) and premium colors (British khaki, sterling silver, black and ice gray)



Model 9204

Options

Cable Drain Metal Trim

Model #	Description		Model #	Description	
SW1319	Standard Colors		AR1335	Chrome	
SW1320	Polished Chrome		AR1336	Everbrass (PVD)	O 6 6
SW1321	Everbrass (PVD)		AR1337	Brushed Nickel	
SW1322	Brushed Nickel	•	AR1338	Oil Rubbed Bronze	(e) (e) (e)
SW1323	Oil Rubbed Bronze				

SWP150	Factory installed nailing flange	3	SWA100	Rainbow Pillow	
SWAP00	Nailing Flange Kit	- Hanglest	SW1325	5-foot Removable Apron	
AR1200	Blower Relocation Kit				



Aniance® Rectangular Air Massage Bath




Specifications

Model #	Description	Codes/Standards
9004	60" x 36" x 19-3/4" Rectangular HealthTouch™ Air Massage Bath	
9104	60" x 36" x 19-3/4" Rectangular GentleTouch™ Air Massage Bath	U P c USPC
9204	60" x 36" x 19-3/4" Rectangular Dual Therapy™ Air Massage Bath	® Intertek

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	HealthTouch - 46 perimeter, side/back air jets GentleTouch - 48 body/foot micro air jets (8 injectors with 12 side/back jets)
Construction	Self-contained, pre-plumbed air massage bath, mounted on a pre-leveled base		DualTherapy - 46 perimeter, side/back air jets and 48 body/foot micro air jets (8 injectors with 12 side/back jets)
Electrical Requirements	Health and GentleTouch – One 120v, 20 Amp, GFCI dedicated circuit; DualTherapy – Two 120v, 20 Amp, GFCI dedicated circuits	Blower	HealthTouch & GentleTouch one variable speed, 120v, 60 Hz, 9.5 Amp, pre-mounted DualTherapy two variable speed, 120v, 60 Hz, 9.5 Amp, pre-mounted
Water Capacity	40 gal. (min.) / 60 gal. (max.)	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m ²)
On/Off Control	Health and GentleTouch – 5-button electronic control pad	Shipping Weight	140 lbs HealthTouch/GentleTouch 155 lbs DualTherapy
	DualTherapy — 10-button electronic control pad	Warranty	Limited Ten Year


Technical Information

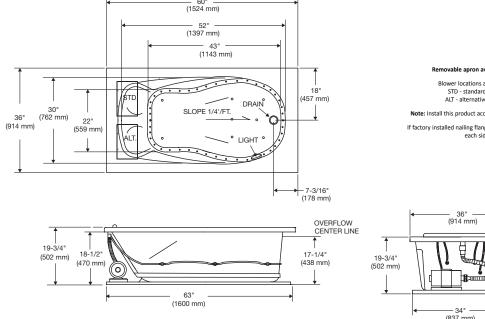

Removable apron available on this model.

Blower locations are shown for clarity. STD - standard blower location ALT - alternative blower location

If factory installed nailing flange is added to a unit, add 1/8"to each side flanged.



These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T. Certified for permanent electrical connection only.