


MARS Mini Split Run Capacitors

MARS SERIES **120**

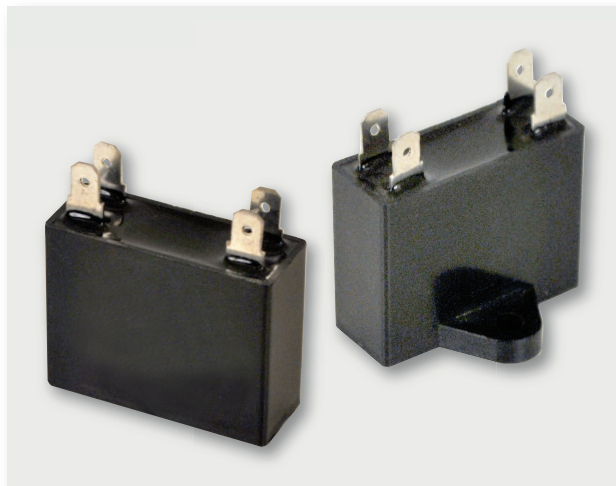

MARS Mini Split Run Capacitors

MARS mini split motor run capacitors are epoxy/resin sealed and widely used as the start-up and/or run capacitor for your motor. They feature very small dissipation factor and inherent temperature rise, high insulation resistance, and stable capacitance.

Technical Specification:

- Ambient temperature: 70° C
- Rated voltage: 450 VAC
- Capacitance tolerance: ± 5
- 50/60 Hz
- Standard: IEC252-2001

MARS NO.	DESCRIPTION	DIMENSIONS
12380	1 MFD X 450V	1-1/2 X 1/2 X 1
12381	1.5 MFD X 450V	1-1/2 X 1/2 X 1
12382	2 MFD X 450V	1-1/2 X 1/2 X 1
12383	2.5 MFD X 450V	1-1/2 X 3/4 X 1-1/4
12384	3 MFD X 450V	1-1/2 X 3/4 X 1-1/4
12385	3.5 MFD X 450V	1-7/8 X 3/4 X 1-3/8
12386	4 MFD X 450V	1-7/8 X 3/4 X 1-3/8
12388	5 MFD X 450V	1-7/8 X 7/8 X 1-3/8
12390	6 MFD X 450V	1-7/8 X 1 X 1-1/2