


Fan & Blower Motors, Single Phase

MARS SERIES **570**

Fan and Blower, Split Phase, Dripproof




- Features:**
- Ball bearings (except as noted)
 - Service Factor, as noted
 - Thermal protection, as noted
 - Variable torque on two speed motors
 - Extended Thru-bolts, as noted
 - Heavy gauge steel constructions
 - 48Y and 48YZ Frame have 48/56 Frame mounting holes
 - UL Recognized and CSA Certified

Resilient Base (Single & Two-Speed)

HP	RPM	VOLTS	FRAME	OVER LOAD	MARS NO.	MODEL NO.	STOCK	FORMER NO.	FORMER MODEL NO.	LIST PRICE	MULT. SYMB.	F.L. AMPS	"C" DIM.	FOOT NOTES
1/2	1725	115	48YZ	AUTO	B208	48S17D2109	★			\$193	F1	7.5	10.43	CF,4,19,53
	1725	115	48YZ	NONE	B306	48S17D2058	★			\$203	F1	7.5	10.32	CF,19,31,52
	1725	115	48	AUTO	HG694	5KH39QN9767X	★			\$215	F1	7.1	9.99	19
	1725	115	48YZ	AUTO	B307	48S17D2059	★			\$220	F1	7.5	10.32	CF,19,31,52
	1725	115	48Z	AUTO	H919	5KH36MNA735X	★			\$218	F1	8.7	10.80	10,19,28
	1725	115	56	AUTO	4392	5KH39QN9405X	★	B348	56S17D2059	\$214	F1	7.9	10.32	19
	1725	115	56	NONE	4390	5KH39QNA039	★			\$240	F1	7.9	10.32	19
	1725	115	56	AUTO	D149	56S17D2050	★			\$197	F1	7.2	10.47	19
	1725	115	56	AUTO	H248	5KH36MN3106X	★			\$244	F1	9.3	10.32	19
	1725	115	56	NONE	H286	5KH36MN3106	★			\$240	F1	9.3	10.32	19
	1725	115	56Z	AUTO	B200	56S17D2049	★			\$197	F1	7.2	10.47	19,32,53
	1725	115	56Z	AUTO	4758	5KH39QN9698T	★			\$250	F1	7.9	9.99	7,19,26
	1725	115/230	48Y	AUTO	4709	5KH36MN5729X	★			\$205	F1	7.6/3.8	9.93	1,4,7,19
	1725	115/230	56	AUTO	B100	56S17D2064	★			\$207	F1	7.2/3.6	10.47	19
	1725	115/230	56Z	AUTO	4684	5KH36MN3127T	★			\$283	F1	8.9/4.5	10.69	9,26
	1725	230	56	AUTO	4393	5KH39QN9544X	★			\$261	F1	4.5	10.32	19
1725	230	48Y	AUTO	D163	48S17D2088	★	4759	5KH39QN9697T	\$202	F1	3.6	10.09	19	
1140	115/230	56	AUTO	H298	5KH48UN6054X	★			\$499	F1	9.0/4.5	12.76	19	
3/4	1725	115	56	AUTO	4338	5KH39QN9541T	★	D164	56S17D2060	\$256	F1	11.4	10.72	18

Furnace Blower, Split Phase

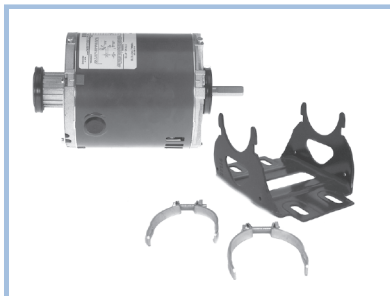

Applications: Designed for replacement of virtually any NEMA 48 and 56 frame belt drive furnace blower motors. PDQ models have 1 1/2" extended splined hub on opposite shaft end for quick and easy positioning of resilient ring to properly fit the pre-existing motor base.

- Features:**
- Ball bearings
 - Reversible rotation connected for CCW rotation from factory
 - NEMA service factors
 - 4733, 4734 and 4735 have both 48 and 56 frame mounting holes and includes mounting base
 - UL Recognized and CSA Certified

Open, PDQ Mounting

HP	RPM	VOLTS	FRAME	OVER LOAD	MARS NO.	MODEL NO.	STOCK	LIST PRICE	MULT. SYMB.	F.L. AMPS	"C" DIM.	MIN/MAX BASE DIM'S	FOOT NOTES
1/4	1725	115	48Y	AUTO	4733	5KH39DNA533T	★	\$148	F1	5.1	9.78	6.62" & 7.91"	
	1725	115	48Y	AUTO	4730	5KH39QN9725T	★	\$136	F1	5.0	9.78	6.62" & 7.91"	30
1/3	1725	115	48Y	AUTO	4734	5KH32HNA532T	★	\$159	F1	6.6	10.03	6.87" & 8.16"	
	1725	115	48Y	AUTO	4731	5KH39QN9696X	★	\$146	F1	5.8	10.28	7.12" & 8.41"	30
	1725	230	48Y	AUTO	4738	5KH39QN9703T	★	\$238	F1	3.1	10.28	7.12" & 8.41"	30
1/2	1725	115	48Y	AUTO	4732	5KH39QN9702T	★	\$193	F1	7.9	10.66	7.50" & 8.79"	30
	1725	115	48Y	AUTO	4735	5KH33JNA534T	★	\$208	F1	7.9	10.28	6.62" & 7.91"	
	1725	230	48Y	AUTO	4739	5KH39QN9704T	★	\$300	F1	4.0	10.66	7.50" & 8.79"	30

★ Stock model for Marathon and/or MARS. Prices and Specifications are subject to change without notice.



The largest selection of motors, components and accessories for the HVAC/R Industry

ME-69

MARATHON