

ENGINEERING EXCELLENCE

Brentwood Series #4BR120T

SPECIFICATION SHEET

DESCRIPTION

- Single Handle Tub and Shower
 Trim Set
- Porcelain Cross Handle
- Ceramic Disc Cartridge with Temperature Limit Stop
- Dual Function 2-1/2" Diameter Showerhead
- Shower Arm and Flange
- Combo 1/2" IPS/Slip-On Diverter Tub Spout
- Tub Spout Escutcheon
- Color Match Sleeve and Retaining Ring

STANDARDS APPLICABLE

- ASME A112.18.1
- CUPC / IAPMO LISTED

FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel
- PN PVD Polished Nickel
- PB PVD Polished Brass
- ORB Oil Rubbed Bronze



#4BR120T SHOWN

FIOW

Single Handle Tub and Shower-Valve Set

• Showerhead Limited to 2.5 GPM

Model #:	

Specific Features:

Project Name:

Submitted For:

□ N/A

Model	Description	Finishes		
#4BR120T	Single Handle Tub and Shower Trim Set	□ PC	□ Other	
#4BR420T	Single Handle Valve Trim Set	□ PC	□ Other	
Required Valve				
		1		



#4020B


DMSP4BR120T/REV. 12 2012 Page 1 of 2

ENGINEERING EXCELLENCE

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013

Installation Note:

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

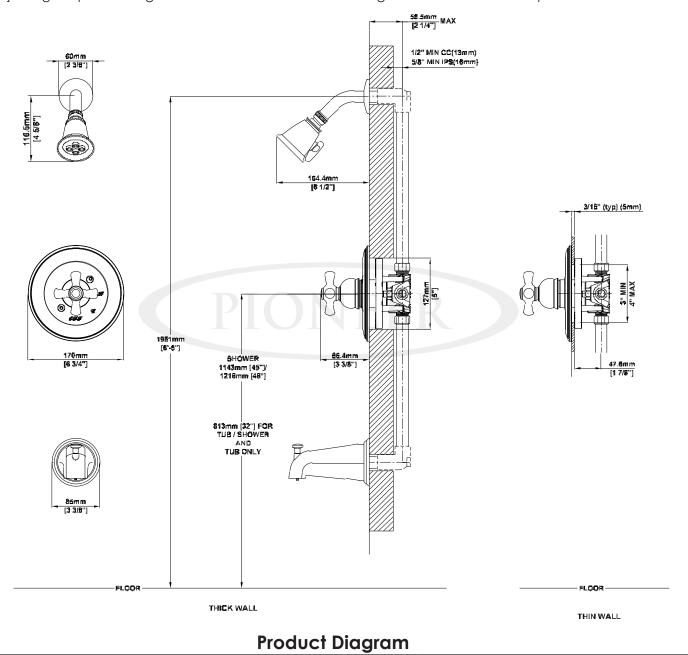



DMSP4BR120T/REV. 12 2012 Page 2 of 2

Pioneer:1-800-338-9468 Commerce, CA 90040

www.pioneerind.com Pioneer Industries, Inc. © 2013