PIONEER ENGINEERING EXCELLENCE Calla Collection #4CL100T SPECIFICATION SHEET **DESCRIPTION FINISHES** Single Handle Tub and Shower PC PVD Polished Chrome ٠ with Diverter Trim Set BN PVD Brushed Nickel Metal Lever Handles SS PVD Stainless Steel Ceramic Disc Cartridge with . PN PVD Polished Nickel Temperature Limit Stop Five Function 4-1/2" Diameter Showerhead 6" Long Shower Arm and Flange 1/2" IPS Tub Spout #4CL100T SHOWN * ADA Color Match Sleeve and Re-. taining Ring Model #: FLOW STANDARDS APPLICABLE Showerhead Limited to 2.5 ASME A112.18.1 Specific Features: GPM ANSI A117.1 CUPC / IAPMO LISTED / ADA Project Name: COMPLIANT Submitted For: Description Model Finishes #4CL100T Single Handle Tub and Shower With Diverter Trim Set DPC Other____ Required Valve #4020B-D □ N/A Single Handle Tub and Shower and Diverter-Valve Set DMSP4CL100T/REV. 12 2012 PIONEER Page 1 of 2 ENGINEERING EXCELLENCE Pioneer:1-800-338-9468


Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013

Calla Collection #4CL100T

SPECIFICATION SHEET

Installation Note:

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

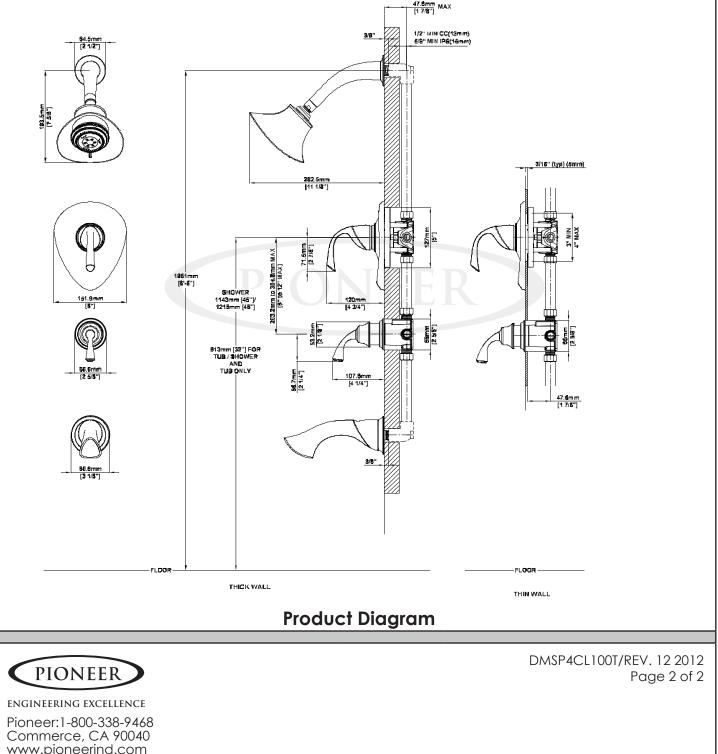

Pioneer Industries, Inc. © 2013