



ENGINEERING EXCELLENCE

Motegi Series #4MT100T

SPECIFICATION SHEET

DESCRIPTION

- Single Handle Tub and Shower With Diverter Trim Set
- Metal Lever Handles
- Ceramic Disc Cartridge with Temperature Limit Stop
- Five Function 3" Diameter Showerhead
- Shower Arm and Flange
- 1/2" IPS Tub Spout
- 6-1/8" Spout Reach, Tub Spout Escutcheon
- Color Match Sleeve and Retaining Ring

FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel
- PB PVD Polished Brass
- PN PVD Polished Nickel
- SS PVD Stainless Steel



#4MT100T SHOWN \* ADA

STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- CUPC / IAPMO LISTED /ADA COMPLIANT

FLOW

- Showerhead Limited to 2.5 GPM Flow Rate

Model #: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Project Name: \_\_\_\_\_

Submitted For: \_\_\_\_\_

Model	Description	Finishes
#4MT100T	Single Handle Tub and Shower With Diverter Trim Set	<input type="checkbox"/> PC <input type="checkbox"/> Other ____
Required Valve		
#4020B-D	Single Handle Tub And Shower With Diverter Valve Set	<input type="checkbox"/> N/A



ENGINEERING EXCELLENCE


Pioneer:1-800-338-9468  
 Commerce, CA 90040  
 www.pioneerind.com  
 Pioneer Industries, Inc. © 2013

DMSP4MT100T/REV. 12 2012

Page 1 of 2

**Installation Note:**

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

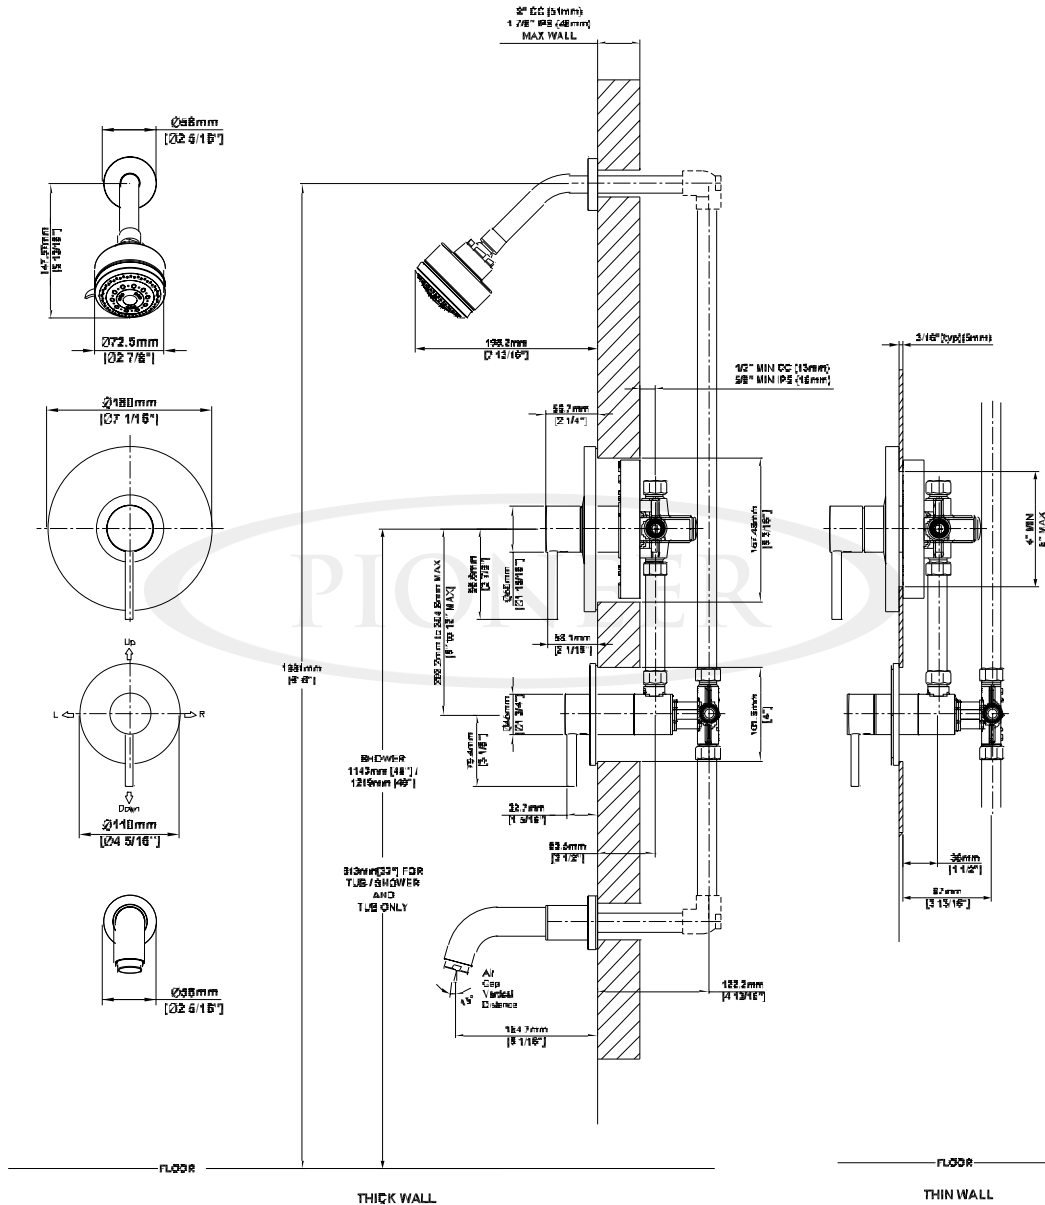

**Product Diagram**



ENGINEERING EXCELLENCE

Pioneer:1-800-338-9468

Commerce, CA 90040

www.pioneerind.com

Pioneer Industries, Inc. © 2013