

SPEAKMAN®

SE-590

EYESAVER® EYEWASH

DESCRIPTION

Portable emergency eyewash. Supplied with stainless steel tank, stay-open full flow ball valve; activated by stainless steel push handle; pressure gauge, air filler, pressure relief valve, twin spray heads with flip-off dust covers, and drench hose activated by a squeeze handle with non-aerated spray nozzle.

SPECIFICATIONS

Tank: 10 gallon stainless steel

Spray heads: (2) yellow plastic spray outlets with flip-top dust caps

Valve: ½" NPT female brass, chrome plated

Activator: Stainless steel push handle

Drench Hose:

VALVE: 3/8" NPT female brass, chrome-plated

HOSE: 6' reinforced, 750 PSI burst pressure, hose clip for valve and dust cap

Performance:

EYEWASH: 0.4 gpm @ 1.5 psi


HAND HELD SPRAY: 1.5 gpm @ 5.6 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- SGN4 Eyewash floor sign
- SSBV Stainless steel ball valve

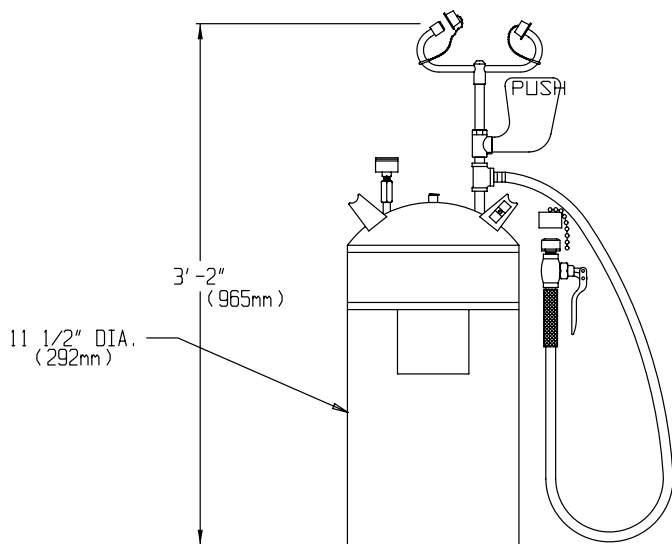

| |
|----------------------------|
| Job Name _____ |
| Location _____ |
| Architect/Engineer _____ |
| Sales Representative _____ |
| Wholesaler _____ |
| Date _____ Model # _____ |