

# HYDAPIPE®

## Flat Wall Mounted Shower System

- 1-912RS-FSB:** Through wall piping configuration with soap dish
- 1-912-FSB:** Through wall piping configuration less soap dish

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket. Levertrol lever diverter with volume control. Wall/hand shower with flexible 5' metal hose with in-line vacuum breaker, wall connection and flange. 30" slide bar for hand shower mounting. Recessed soap dish. Stainless steel covering to be 16 gauge with #4 brush finish.

### Modifications:

#### Valve:

- Suffix 21:** Single supply, manual shut off, 4 arm handle
- Suffix 22:** Single supply, manual shut off, lever handle
- Suffix 60:** Single supply, metering shut off (not ADA compliant)
- Suffix 56:** Pressure Balance and metering combination

#### Shower head:

- Suffix 270:** Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 131:** Super, ball joint, adjustable spray head
- Suffix 121:** Super, ball joint, adjustable spray head with volume control
- Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ:** One way ball joint
- Suffix DSH:** Additional shower head in lieu of hand spray unit

#### Soap dish:

- Suffix CWM:** Wall mounted cake soap dish


#### Hand spray accessories:

- Suffix FS:** Hand spray, hose and wall hook (in lieu of Suffix FSB)
- Suffix OD:** Quick disconnect for hand spray units
- Suffix R:** White vinyl hose in lieu of metal hose

#### Seat and Grab bars\*:

- Suffix HC1:** Slat seat and two wall grab bar (right hand)
- Suffix HC2:** Slat seat and two wall grab bar (left hand)
- Suffix HC3:** Padded seat and two wall grab bar (right hand)
- Suffix HC4:** Padded seat and two wall grab bar (left hand)

\*ADA requirements state that the seat shall be located opposite the controls. This will require the construction of a partial wall, or use of a reinforced partition for mounting the folding seat. Construction of a partial wall or reinforced partition to be provided by others.

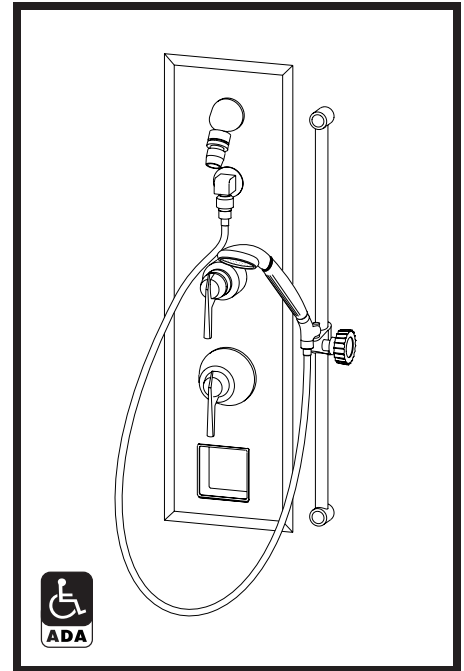

**SYMMONS PRODUCTS MEET  
ANSI A112.18.1M, EPA '92  
AND ALL KNOWN FLOW RATE  
REQUIREMENTS.  
Shower Heads and Hand Showers  
2.5 GPM (9.5 L/min)**

#### Job/Location

.....  
 .....

#### Engineer

.....  
 .....

#### Contractor

.....  
 .....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849  
 Website: www.symmons.com ■ Email: customerservice@symmons.com