


25-500-B30-V Temptrol II™ Shower System with Hand Spray


Temptrol II (2000 Series) Pressure Balancing mixing valve with built-in choke and adjustable stop screw to limit handle turn. Lever diverter with integral volume control. Clear-Flo shower head with arm and flange. Wall/hand shower with in-line vacuum breaker, flexible 5' metal hose, wall connection and flange. 30" slide bar for hand shower mounting.

Modifications:

- Suffix X:** Integral service stops—allows water shut-off at valve for service
- Suffix LP:** Loop style lever handle
- Suffix LR:** Lever handle
- Suffix REV:** Reverse coring, hot on right, cold on left for back to back installations
- Suffix FG:** Wall mounting flange for fiberglass or panel wall installation (will accommodate wall thickness of 1/16" to 3/4")

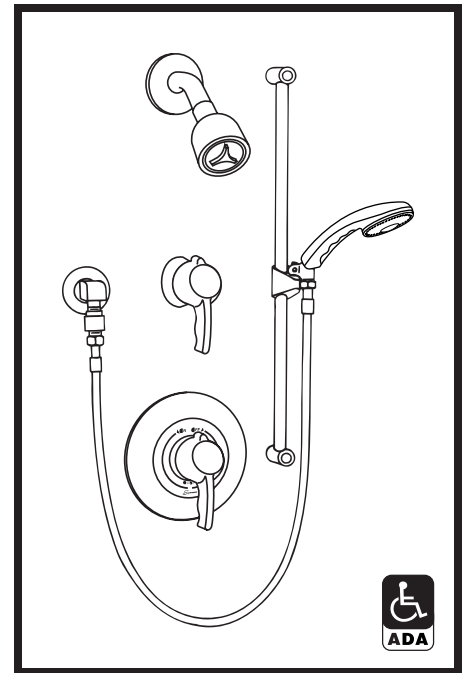

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

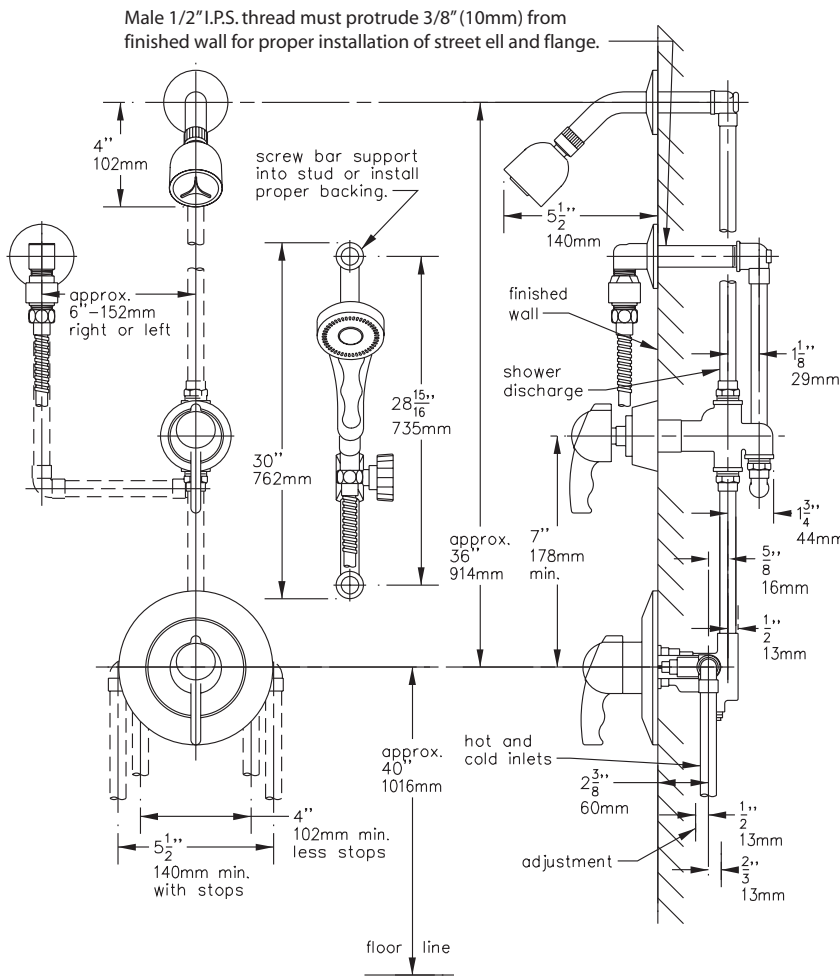

Job/Location

.....

.....

Engineer

.....

.....

Contractor

.....

.....

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. Dimensions are for ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
(800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
Website: www.symmons.com ■ Email: customerservice@symmons.com

