

Tub & Shower System with Hand Shower 4706 **Specification Submittal**

Feature Highlights

- Symmons tub and shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Separate triple outlet lever diverter valve
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Shower head with mounting bracket
- Flow rate 2.5 gpm (9.5 L/min) for both shower head and hand shower
- Tub spout
- Polished chrome finish

Model Numbers

1	Tub and Shower System with Symmons Temptrol® pressure balancing mixing valve p/n 4000-BODY and triple outlet diverter p/n 4-460E-BODY
	Trim only, valve and diverter must be ordered separately
	Symmons Temptrol [®] pressure balancing mixing valve without trim
	Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shutoff for service.
	Symmons triple outlet diverter valve without trim

Finish Options / Modifications

Append appropriate -suffix to model number.

- -STN Satin nickel
 - Polished chrome (standard finish)





Options / Modifications

Append appropriate -suffix to model number.


- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- Symmons Temptrol[®] pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4706.)
- ☐ -2.0 2.0 (7.6 L/min) Flow rate restrictor
- ☐ -1.5 1.5 (5.7 L/min) Flow rate restrictor

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations

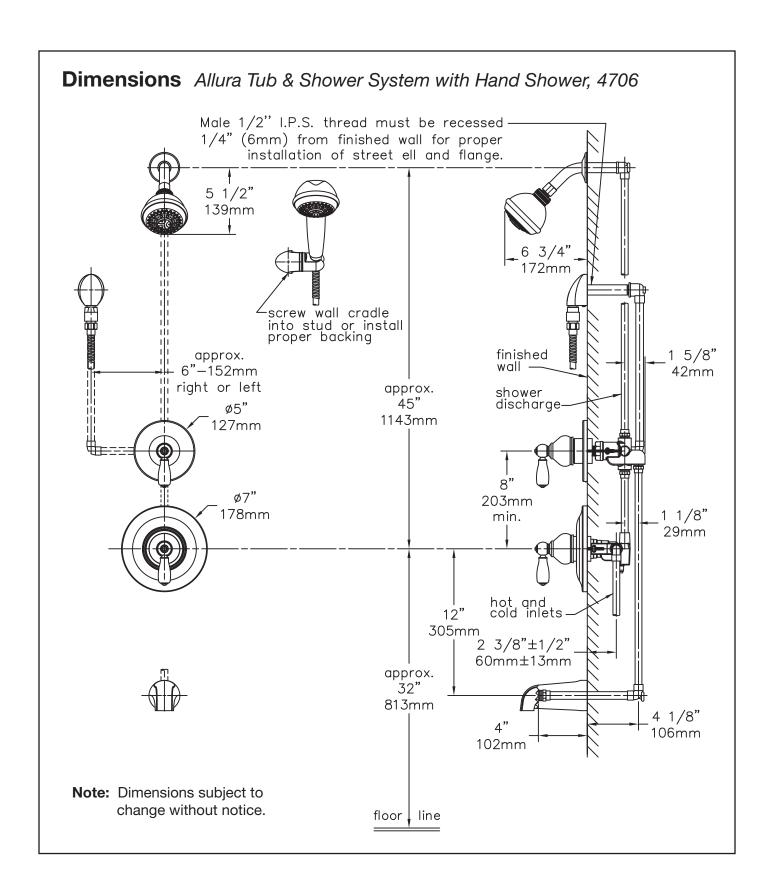

Symmons Industries, Inc. • 31 Brooks Drive • Braintree, MA 02184 (800) 796-6667, (781) 848-2250 • Fax (800) 961-9621, (781) 664-1300 Website: www.symmons.com • Email: customerservice@symmons.com

