


Location:

# SYMMONS® Temptrol™

## Hand Shower System

### C-96-300-B30-V

## Specification Submittal

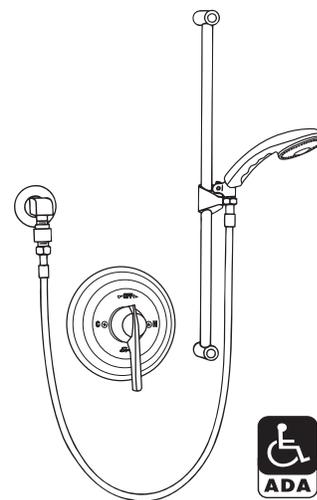

### Feature Highlights


- Symmons Commercial Hand Shower System with lever handle
- T-300-V Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- 30 inch slide bar for mounting hand shower
- Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Standard Flow rate 2.5 gpm (9.5 L/min)  
*Optional lower flow rate restrictor available* 
- Polished chrome finish (standard)

### Model Numbers

- C-96-300-B30-V  
Hand Shower System with Symmons Temptrol® mixing valve and 30 inch slide bar
- C-96-300-B30-V-TRM  
Trim only, valve and diverter must be ordered separately

### Handle Options / Modifications

Append appropriate -suffix to model number.



- LAM Lever handle

### Finish Options / Modifications

Append appropriate -suffix to model number

- Polished chrome (standard finish)

### Options / Modifications

Append appropriate -suffix to model number

- X Symmons Temptrol mixing valve includes integral service stops to allow water shut-off for service
- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- REV Reverse coring in valve for back to back installations; hot on right, cold on left  
Note: Available with -X integral stops only
- CHKS Check Stops: Temptrol® mixing valve includes integral check stops.  
Note: Available with -X integral stops only
-  -2.0 2.0 gpm (7.6 L/min) flow rate restrictor  
(Requires substituting T-300-V hand shower wand with EF-100)
-  -1.5 1.5 gpm (5.7 L/min) flow rate restrictor  
(Requires substituting T-300-V hand shower wand with EF-100)
- L/HS Hand Shower wand not included  
Includes hose, in-line vacuum breaker, wall connections and flange only
- 72 6 foot hand shower hose in place of standard 5 foot hose
- R Vinyl hose in place of flexible metal hose
- B48 48 inch slide bar in place of standard 30 inch
- QD Quick-disconnect on hand shower
- VP Vandal resistant escutcheon screws

### Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

### Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

