

# **Tub and Hand Shower System** S-4204 **Specification Submittal**

## **Feature Highlights**

- Symmons tub and hand shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Secondary integral volume control handle
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Standard flow rate is 2.5 gpm (9.5 L/min)
- Tub spout
- Polished chrome finish

#### **Model Numbers**

	with Symmons Temptrol® pressure balancing mixing valve p/n S-4002-BODY
S-4204-TRM	Trim only, valve and diverter must be ordered separately
S-4002-BODY	Symmons Temptrol® pressure balancing mixing valve withou trim
S-4002-X-BODY	Symmons Temptrol® pressure balancing mixing valve withou trim. Valve includes integral service stops to allow water shut-off for service.


☐ S-4204..... Tub and Hand Shower System

## Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations









### **Options / Modifications**

Append appropriate -suffix to model number.

- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- ¬X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n S-4002-X-BODY. (Option only applies when ordering model S-4204)
- □ -2.0 2.0 (7.6 L/min) Flow rate restrictor
- □ -1.5 1.5 (5.7 L/min) Flow rate restrictor


#### **Finish Options / Modifications**

Append appropriate -suffix to model number.

- ☐ -STN Satin nickel
- ☐ -ORB Oil Rubbed Bronze
  - Polished chrome (standard finish)

#### Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

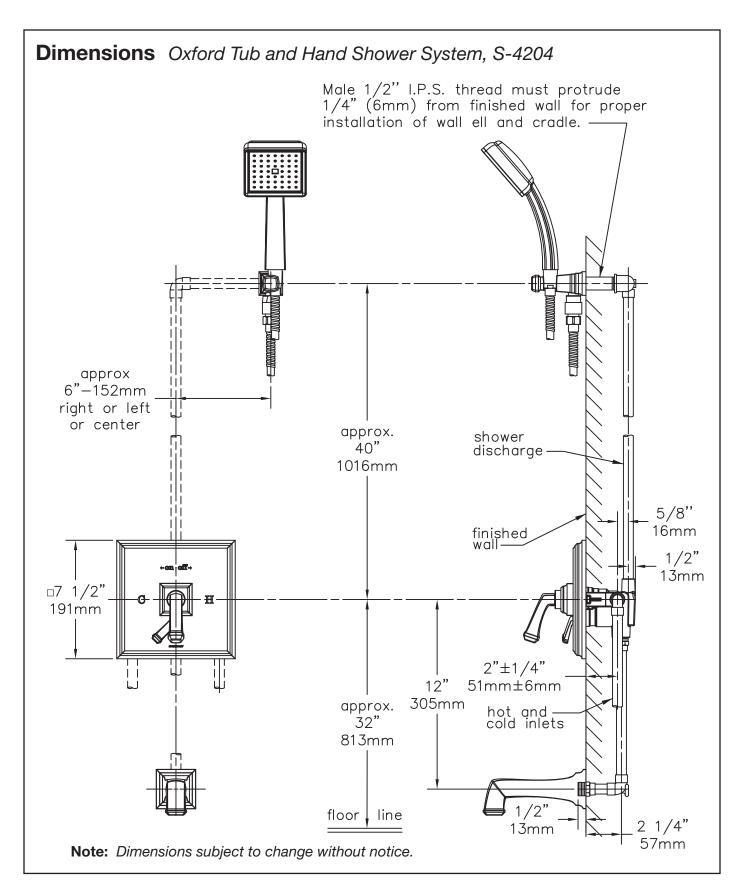

Symmons Industries, Inc. = 31 Brooks Drive = Braintree, MA 02184 (800) 796-6667, (781) 848-2250 = Fax (800) 961-9621, (781) 664-1300 Website: www.symmons.com = Email: customerservice@symmons.com

