


Location:

SYMMONS® Temptrol™

Tub & Hand Shower System, S-96-400-B30-L-V Specification Submittal

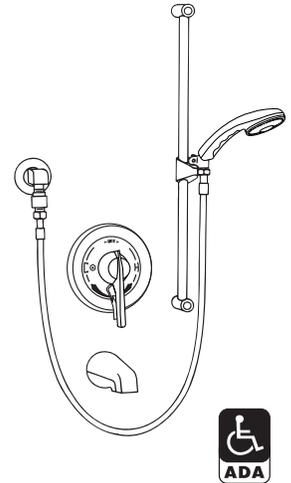

Feature Highlights


- Symmons Tub and hand shower system with lever handle
- Symmons Temptrol® pressure balancing mixing valve with integral diverter and adjustable stop screw to limit handle turn
- Wall/Hand shower, #T-300-V and a 5 foot flexible metal hose with in-line vacuum breaker, wall connection and flange
- 30 inch slide bar for hand shower mounting
- Standard flow rate 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictors available
- Tub spout
- Polished chrome finish (standard)

Model Numbers

- S-96-400-B30-L-V..... Tub and Hand Shower System with Symmons Temptrol® pressure balancing mixing valve
- S-96-400-B30-L-V-TRM..... Trim only, valve must be ordered separately

Handle Options / Modifications

Append appropriate -suffix to model number.

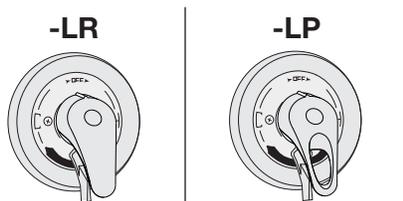

- LR Lever handle
- LP Loop style lever handle

Finish Options / Modifications

Append appropriate -suffix to model number.

- Polished chrome (standard)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Options / Modifications

Append appropriate -suffix to model number.


- X Symmons Temptrol pressure balancing mixing valve includes integral service stops to allow water shut-off for service
- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- REV Reverse coring in valve for back to back installations; hot on right, cold on left, available with (-X) integral stops only
- 2.0 2.0 gpm (7.6 L/min) flow rate restrictor (Requires substituting T-300-V hand shower wand with EF-100)
- 1.5 1.5 gpm (5.7 L/min) flow rate restrictor (Requires substituting T-300-V hand shower wand with EF-100)
- 6 6 foot hand shower hose in place of standard 5 foot hose
- R Vinyl hose in place of flexible metal hose
- B48 48 inch slide bar in place of standard 30"
- L/HS Hand Shower wand not included
Includes hose, in-line vacuum breaker, wall connections and flange only
- QD Quick-disconnect on hand shower
- SS Slip-on tub spout in place of standard unit
- B Chrome brass escutcheon
- VP Vandal resistant

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions *Temptrol Tub and Hand Shower System, S-96-400-B30-L-V*

Male 1/2" I.P.S. thread must protrude 3/8" (10mm) from finished wall for proper installation of street ell and flange.

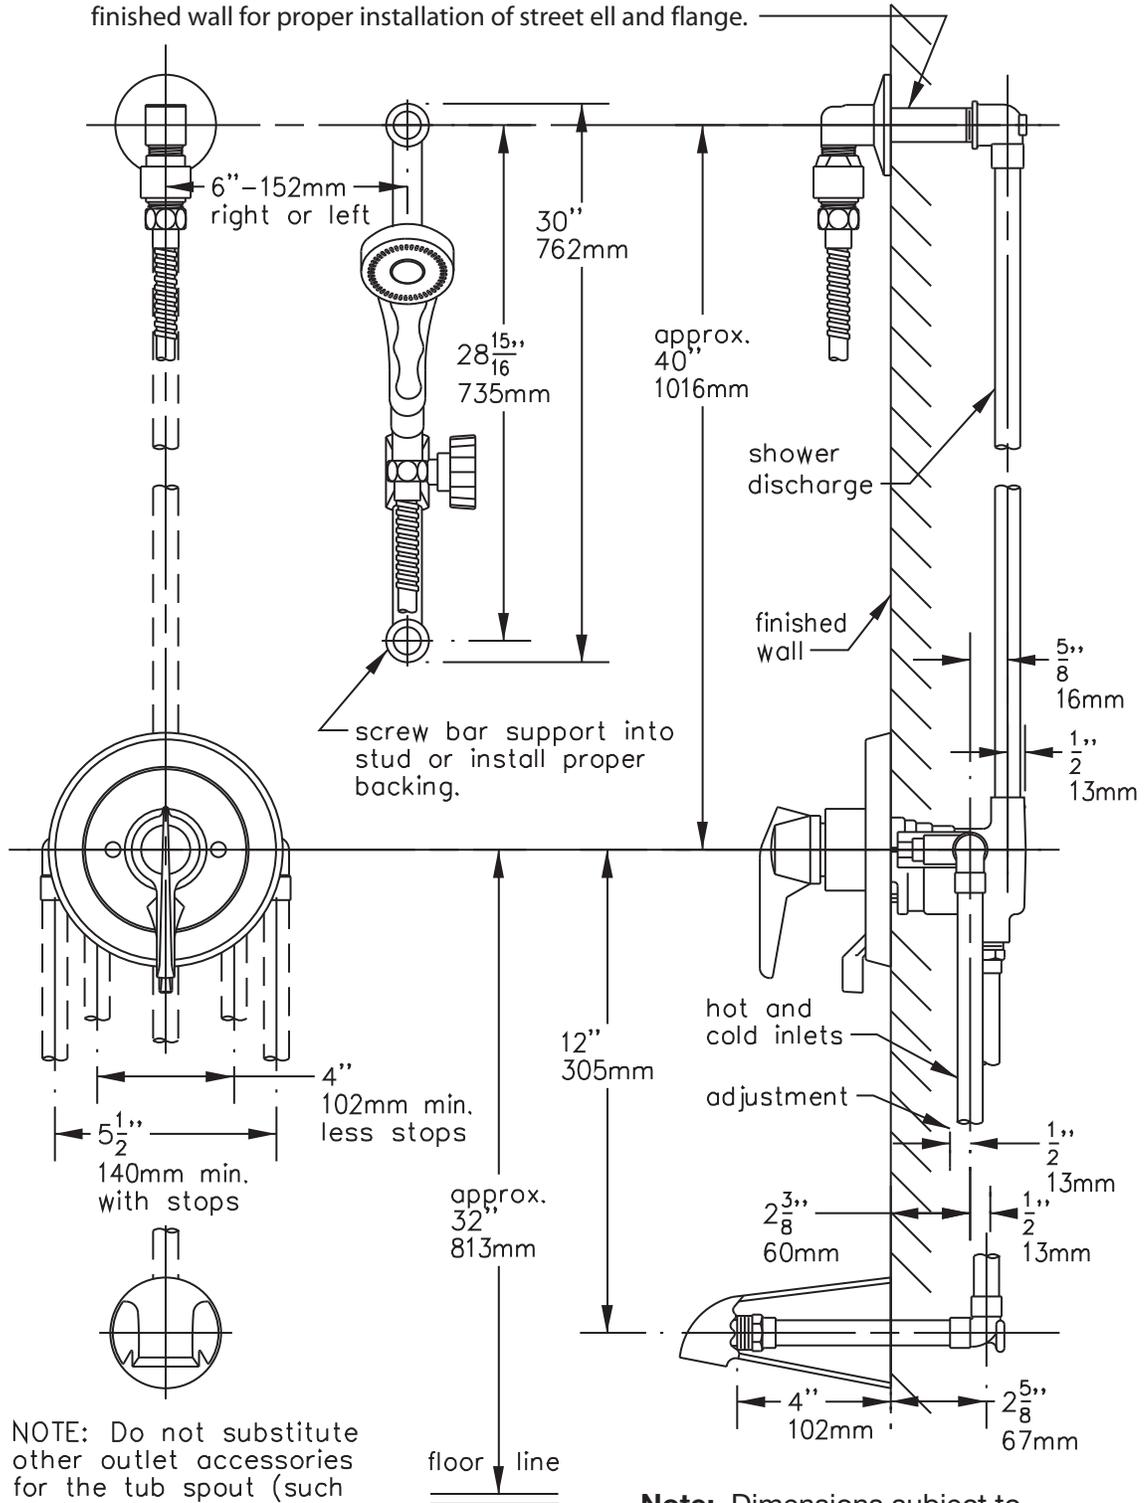

NOTE: Do not substitute other outlet accessories for the tub spout (such as hose and spray, body spray, etc.)

Note: Dimensions subject to change without notice.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300
 Website: www.symmons.com ■ Email: customerservice@symmons.com

