Aquia® II Close Coupled Toilet, 1.6GPF & 0.9GPF

FEATURES

- Dual-Max® flushing system
- Close coupled elongated front bowl and tank set, less seat
- Chrome push-button style dual flush option
- Concealed trapway

MODELS

CST416M

COMPONENTS

- CT416 Elongated Front Bowl
- ST416M Tank and Cover only
- SS114 SoftClose® seat (sold separately)
- SS154 SoftClose® seat (sold separately)
- SS204 SoftClose® seat (sold separately)

COLORS/FINISHES

Standard
 #01 Cotton
 #03 Bone
 #11 Colonial White
 #12 Sedona Beige
 #51 Ebony

PRODUCT SPECIFICATION

The two-piece low consumption dual-max flushing system toilet shall be 1.6GPF/0.9GPF. Toilet shall have high-profile tank, elongated front bowl and chrome push-button type trip lever. Toilet shall be TOTO Model CST416M



QUAMAX

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance





Aquia® II Close Coupled Toilet, 1.6GPF & 0.9 GPF

SPECIFICATIONS

Water Use

 (6.0 LPF/3.4LPF)

 Flush System

 Dual-Max

 Min. Water Pressure
 Water Surface
 4 x 4-1/2"

Water Surface 6" x 4Trap Diameter 2-1/8"
Rough-in 12"
Trap Seal 2-1/8"

Warranty One Year Limited Warranty

 Material Vitreous china
 Shipping Weight CT416 - 66.5lbs ST416M - 30lbs

Shipping Dimensions CT416

27-3/4"L x 15-1/2"W¹ x 10-1/2"W² x 18"H


ST416M


16"L x 7-1/2"W x 18-1/2"H


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

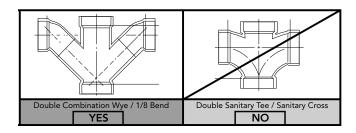

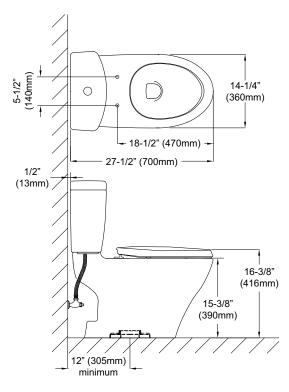



TOTO_®

These dimensions and specifications are subject to change without notice