Silas™ Single-Handle Lavatory Faucet

FEATURES

- WaterSense certified low-flow 1.5 gpm faucet
- Lever handle
- Solid brass construction
- Ceramic disk mixing cartridge
- Metal pop-up drain assembly included

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB1953, Vermont S.152 & Maryland HB. 372, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant







PRODUCT SPECIFICATION

The single-handle lavatory faucet shall have a maximum flow rate of 1.5 gpm (5.7 lpm). Product shall have lever handle. Product shall have a solid brass construction. Product shall have a ceramic disk mixing cartridge. Product shall include metal popup drain assembly. Product shall beTOTO Model TL210SD#____.



$\mathsf{Silas}^{^{\mathsf{TM}}}$ Single-Handle Lavatory Faucet

SPECIFICATIONS

Warranty Lifetime Limited Warranty

(Residential Use)


One Year (Commercial Use)


Material Brass


• Shipping Dimensions 15"L x 7-7/8"W x 3"H

Shipping Weight 5.0 lbs.

Maximum Flow Rate 1.5 gpm (5.7 lpm)

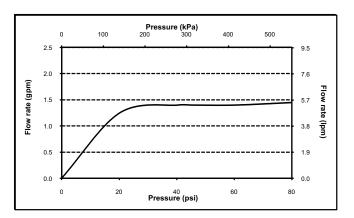

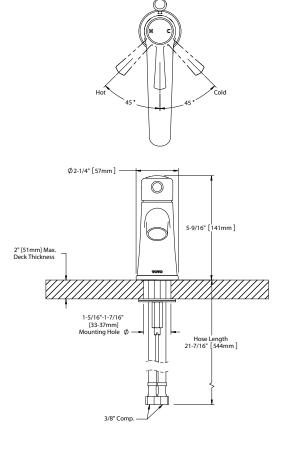

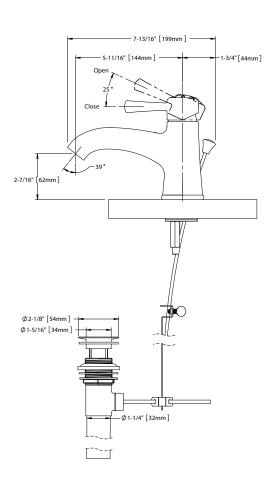



These dimensions and specifications are subject to change without notice