



# CONTROL CENTER MODEL MS

## SINGLE DIRECTION

### SPECIFICATIONS

- Single direction only
- Push button ON/OFF switch
- High impact polycarbonate construction
- NEMA 4
- Magnetic starter/provides automatic shut-off in case of power interruption
- Operates on line voltage


### VOLTAGE/PHASE AVAILABILITY

Model	Voltage/Hz	Phase	Disposer Models
MS-7	120V, 50/60 Hz	1 Ph	SS-100 to SS-200
MS-8	208-240V, 50/60 Hz	1 Ph	SS-100 to SS-200
MS-9	208-240V, 50/60 Hz	3 Ph	SS-100 to SS-1000
MS-10	380-460V, 50/60 Hz	3 Ph	SS-100 to SS-1000




**1**  
YEAR  
ON-SITE  
PARTS & LABOR  
WARRANTY

### RECOMMENDED INSTALLATION

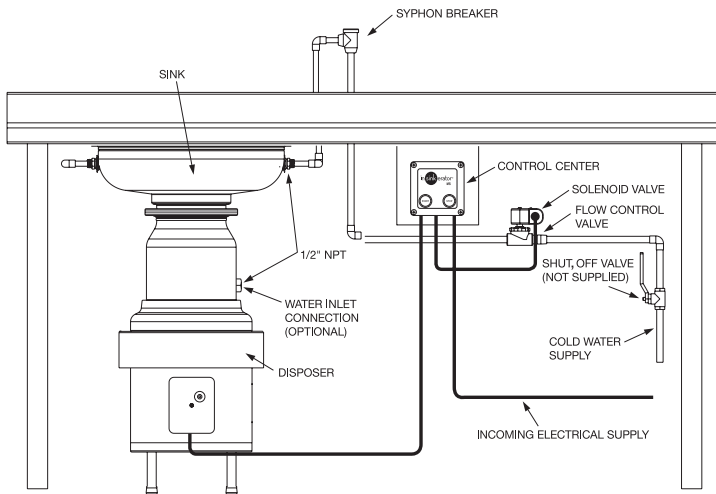

### DIMENSIONS

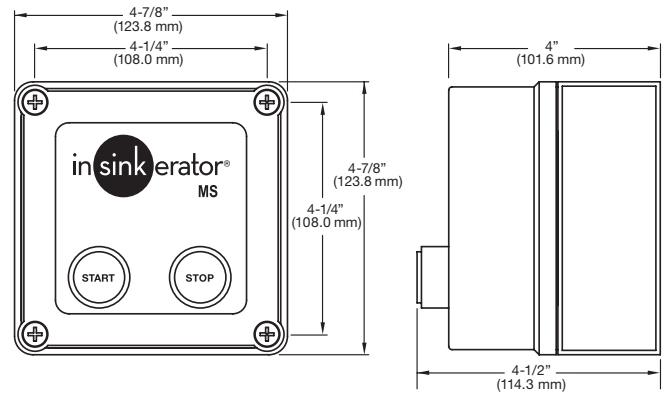

NOTE: Use a #8 screw to mount control.

A complete collection of our product drawings is available for download at the **InSinkErator Revit/CAD Library**, which can be found at [www.insinkerator.com/foodservice](http://www.insinkerator.com/foodservice). Product information is also accessible on **The KCL CADalog**. More information is available from KCL at [www.kclcad.com](http://www.kclcad.com).



4700 21st STREET  
RACINE, WI 53406  
TEL: 800-845-8345  
FAX: 262 554-3620  
[www.insinkerator.com/foodservice](http://www.insinkerator.com/foodservice)



The Emerson logo is a trademark and a service mark of Emerson Electric Co.

