RK-OSF Over Sized Flange

For more information contact...

WOODFORD MANUFACTURING COMPANY


2121 Waynoka Road, Colorado Springs, Colorado 80915 • Phone: (800) 621-6032 • Fax: (800) 765-4115 To view our complete product line visit: www.woodfordmfg.com or email: sales@woodfordmfg.com *A Division of WCM Industries, Inc.*

Hole in the wall?

Whether updating an old faucet with a new Woodford freezeless faucet or improving an existing installation, the new RK-OSF Over Sized Flange can cover a larger hole due to previous installation plus secure the faucet to a solid surface.

The RK-OSF can be attached to any new or existing Woodford Model 14, 16, 17, 19 & 101 wall flange.

Outer holes are spaced a full 3 1/2" apart for better mounting screw contact in masonry or siding.

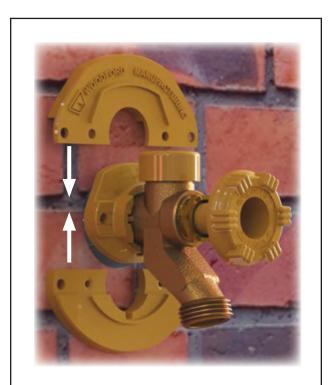

OSF Parts:

- 1. 30091 Over Sized Flange Top
- 2. 30092 Over Sized Flange Bottom
- 3. 30234 Mounting Screws (2)



If New Installation

- 1. Join the (2) RK-OSF halves around the faucet tube and behind the smaller faucet flange.
- 2. Fasten flanges together using (2) included screws.
- 3. Position the faucet through the wall and secure with proper type and length screws.

If Repair Installation

- 1. Remove any screws from the existing faucet flange.
- 2. Be sure the wall flange can be pulled 3/8" away from the wall.
- 3. Slip the Top and Bottom OSF halves behind the existing faucet flange.
- Align the 2 inner OSF holes with the existing faucet flange holes and secure with (2) included screws.
- 5. Install (2) screws through the outer OSF holes to secure faucet onto wall.

RK-OSF List Price......\$2.50