

SPECIFICATIONS

ROMAN TUB FAUCET WITH SOFT TOUCH PERSONAL SHOWER™

Description

- 2 handle with solid brass spout
- Soft Touch Personal Shower[™] with integral diverter system*
- · Spout plug for pressure testing & plaster guard
- Fits 1 3/8" to 1 1/2" diameter mounting hole

Standards

- ASME A112.18.1
- CSA B125
- Listed IAPMO/UPC
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms 🕭

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



Ġ.

D307740 FAIRMONT™


Available Colors & Finish

- Chrome
- Brushed Nickel (BN) • Distressed Nickel (DN)
- Oil Rub Bronze (RB)

Trim Kits : (for use w/ rough-in valves) D308840T (w/o Personal Shower)

Special Packaging

- This product also available with valve packaged separate from trim.
- Use with rough-in valve: D210000BT (10" CC fixed) or
- D215000BT (widespread) • Valves are combination 1/2" copper
- sweat, 1/2" NPT threaded connectors for all ports

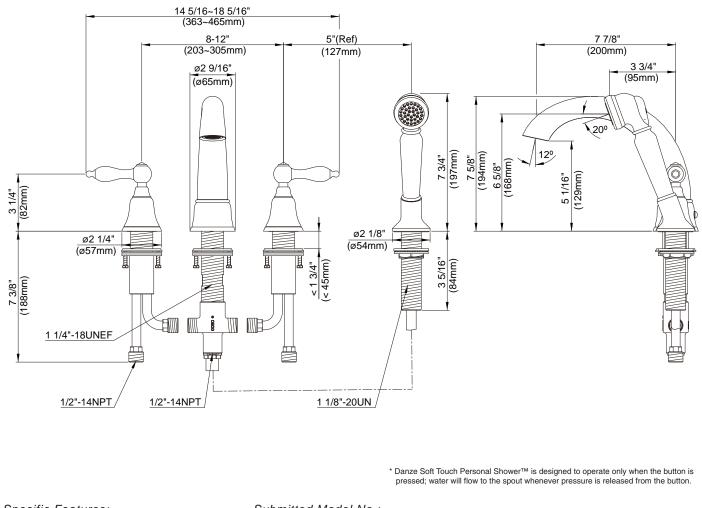

Submitted Model No.: _


Danze, Inc., 2500 Internationale Parkway, Woodridge, IL 60517, USA WWW.DANZE.COM



Specific Features: _

SPECIFICATIONS



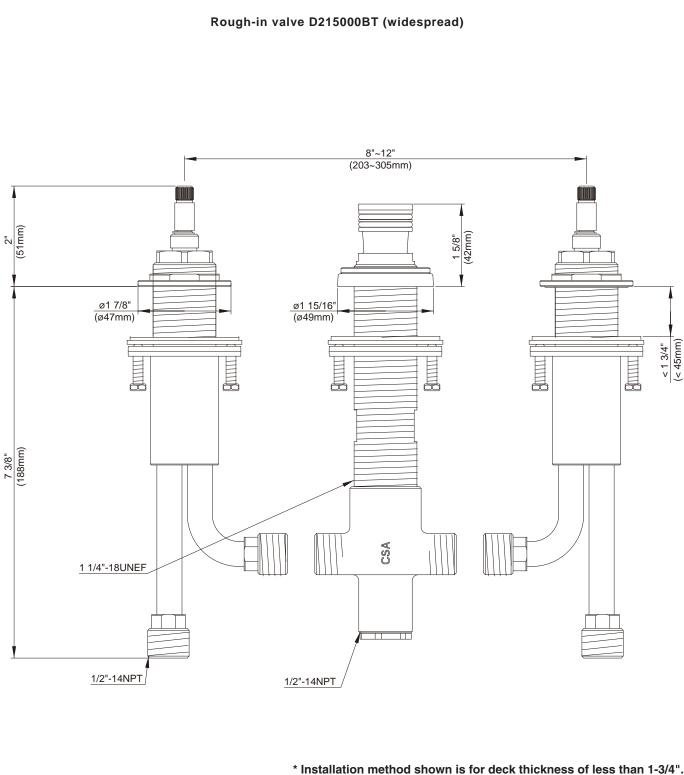

* Installation method shown is for deck thickness of less than 1-3/4". If the installation is for deck thickness between 1-3/4" and 3-1/2", the sleeve nut needs to be reversed.

____ Submitted Model No.: __