MOEN Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes metal pop-up type waste assembly
- Includes optional 3 hole deck plate (escutcheon) Flexible supply lines with 3/8" fittings connect directly to supply stops

OPERATION

Pivot action lever style handles .

FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

1255[™] Duralast[™] cartridge for Single-Handle Faucets


STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1, NSF 61/9, and all applicable requirements referenced therein
- Third party certified to comply with WaterSense® High Efficiency Bathroom Sink Faucet Specification
- Contains no more than 0.25% weighted average lead contents
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

ADA (5) for lever handle •

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




ROTHBURY[™] **Single-Handle Lavatory Faucet**

Models: S6202 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/8" MIN. DIA.

**USE A1616 EXTENSION KIT FOR VESSEL SINK APPLICATIONS



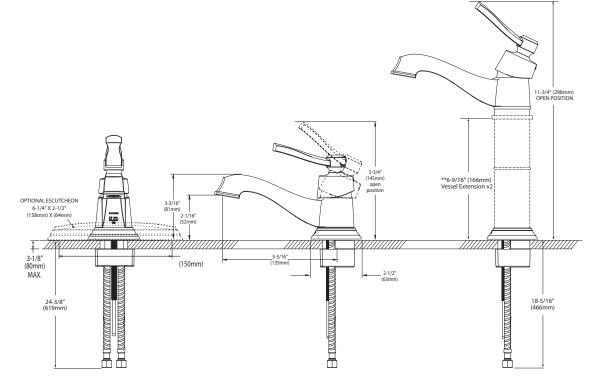

CRITICAL DIMENSIONS

(DO NOT SCALE)