




Fire Rated Submittal Sheet

2663 Series

Standard Frame 3 Hour Curtain-Type Fire Damper Out-of-Airstream

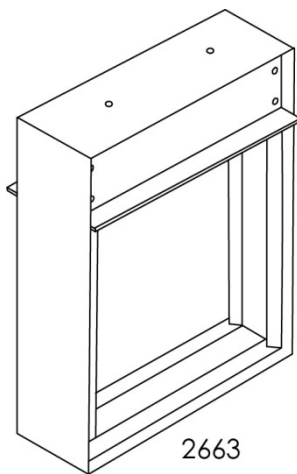

Model: 2663


Description: Standard Frame 3 Hour Curtain-Type Fire Damper Out-of-Airstream

Standard Features:


- Square or rectangular curtain-type fire damper for vertical mount
- 4 1/4" standard roll formed out-of-airstream frame
- Designed for use in wall, floors, and partitions with fire resistance ratings of 3 hours or less (for ceiling application, see 2700 Series)
- UL listed and tested in accordance with UL Standard 555
- 3 hour fire resistance rating
- Building materials rated 4 Hours or less
- CSFM California State Fire Marshal listed
- Interlocking steel roll-formed blade
- Damper manufactured from corrosion tested galvanized mild steel (G-90)
- 165° replaceable fusible link
- Maximum dimensions 60" W, 52" H

Options:

- ☐ Stainless steel
- ☐ Sleeves
- ☐ Fraction, exact O.D. dimensions

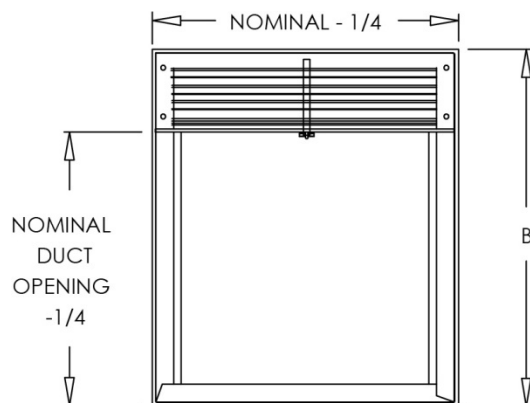

2663

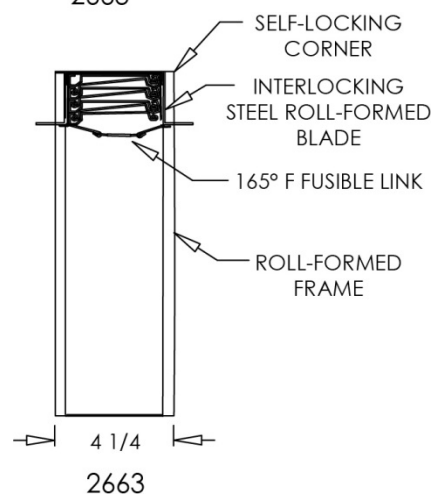

2663 Frame Height	
Duct Size	Height (B)
4" - 7"	+3/4"
8" - 16"	+1 3/4"
17" - 26"	+2 3/4"
27" - 35"	+3 3/4"
36" - 44"	+4 3/4"
45" - 52"	+5 3/4"

Example: Height (B) for 20" duct would be 22 3/4"

Additional Information:

Project / Location:

Engineer:

Architect:

Contractor:

Submittal Notes