

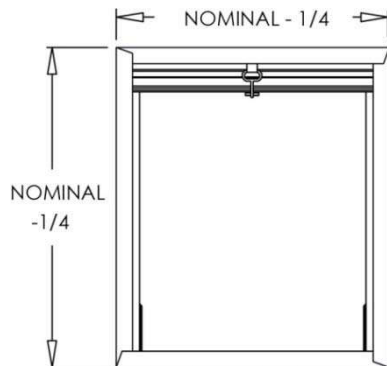
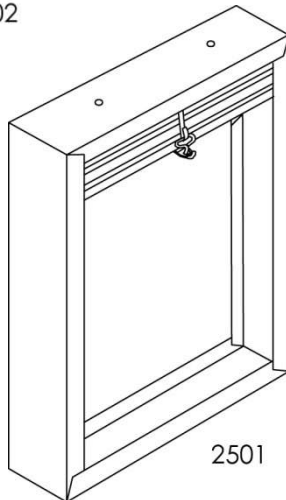




Fire Rated Submittal Sheet

2502 Series

Thin-line Frame 1 ½ Hour Curtain-Type Fire Damper

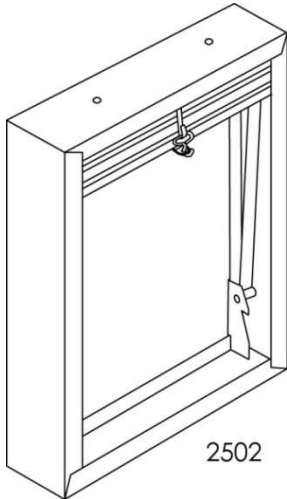

2501 & 2502

Model: 2502


Description: Thin-line Frame 1 ½ Hour Curtain-Type Fire Damper (Spring Actuated)

Standard Features:

- Square or rectangular spring actuated curtain-type fire damper for vertical or horizontal mount
- 2" thin-line roll formed out-of-airstream frame
- Designed for use in wall, floors, and partitions with fire resistance ratings of 1-1/2 hours or less (for ceiling application, see 2700 Series)
- UL listed and tested in accordance with UL Standard 555
- 1 1/2 hour fire resistance rating
- Building materials rated 2 hours or less
- CSFM California State Fire Marshal listed
- Interlocking steel roll-formed blades
- Blade lock to secure blades once product is activated
- Damper manufactured from corrosion tested galvanized mild steel (G-90)
- 165° replaceable fusible link
- Maximum dimensions 41" W, 36" H

Options:

- ☐ Vertical mount only, maximum one piece size 48" W, 49" H (2501)
- ☐ Stainless steel
- ☐ Sleeves
- ☐ Fractional, exact O.D. dimensions

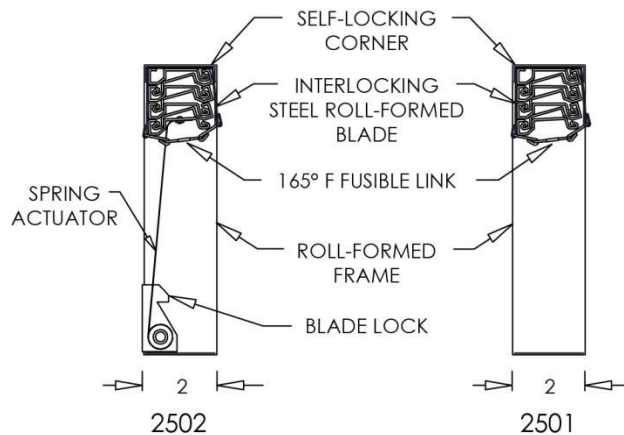

Additional Information:

Project / Location:

Engineer:

Architect:

Contractor:

Submittal Notes