



PORTABLE ELECTRIC BAND SAWS

ALL MODELS USE STANDARD 44-7/8" X 1/2" .020" BAND SAW BLADES


**TWO SPEED
200 AND 250 SURFACE FT/MIN.
AC/DC MODELS**

6223
LESS CASE

AC ONLY MODELS

6225
LESS CASE

6226
INCLUDES STEEL
CARRYING CASE

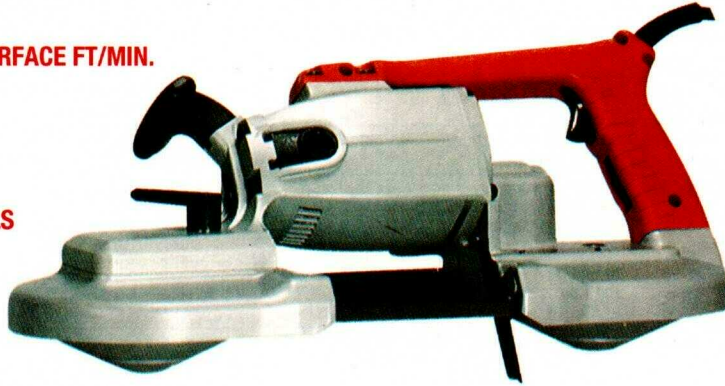

**TRIGGER SPEED CONTROL
0-250 SURFACE FT/MIN.
AC ONLY MODELS**

6234
INCLUDES STEEL
CARRYING CASE



- **Powerful Motor With Long Life Brushes & High Output Fans**
Provides high performance for the toughest cutting operations.
- **Optimum Speed Range**
Ideal for cutting pipes, bolts, re-bar, angle iron, tracks and other profiles in a variety of materials. All models include fast cutting, long lasting Super-Tough® Bi-Metal blades.
- **All Ball & Roller Bearing Construction**
For smooth, durable operation, ball bearing mounted armature is dynamically balanced.
- **High Torque Worm Gear & Chain Drive Mechanism**
For optimum motor torque transfer and durability. Self-lubricated for maximum wear resistance.
- **Excellent Balance**
Center of gravity located directly over blade results in straighter cuts while reducing operator fatigue. Front T-handle provides superior control.
- **Open Line Of Sight**
For more accurate cuts.
- **Blade Tightening Lever**
Long life cam provides quick and easy change from one blade to another.

SPECIFICATIONS

CATALOG NUMBER	NO LOAD SURFACE FT. PER MIN.	VOLTS	AMPS	CAPACITY ROUND STOCK	CAPACITY RECTANGULAR STOCK	LENGTH	NET WGT. LBS.	SHIP. WGT. LBS.
6223 Less Case	250/200	120 AC/DC	6/5	3-1/2"	3-1/2" x 4-1/2"	20"	16	20-1/2
6225 Less Case	250/200	120 AC ONLY	6/5	3-1/2"	3-1/2" x 4-1/2"	20"	16	20
6226				Same as 6225, but with Steel Carrying Case			25	29
6234	0-250	120 AC ONLY	6.0	3-1/2"	3-1/2" x 4-1/2"	20"	25	28

STANDARD EQUIPMENT: Includes One 14 Tooth Super-Tough® Bi-Metal Blade 48-39-0510.

ACCESSORIES FOR ALL MILWAUKEE BAND SAWS

TYPE "G" GREASE

49-08-4140 1 lb. can.

REPLACEMENT BLADE PULLEY TIRE

45-69-0020 Two tires per package.

STEEL CARRYING CASES

48-55-1920 When purchased separately for Models 6223 and 6225.

48-55-1930 When purchased separately for Deep Cut Models 6230 and 6236.

