

This unit offers anti-siphon and non-rupture protection.

The freezeless Model 19 is intended for irrigation purposes and designed for year-round residential regardless of outside temperature. This product contains an integral backflow protection device which protects up to 125 psi of backpressure and therefore does not require an add-on vacuum breaker.

Freezeless Anti-Siphon Wall Faucet Model 19




SPECIFICATIONS:

- Manufactured under one or more of the following patents:
For Patent Information see:
[HTTP://www.woodfordmfg.com/Patents](http://www.woodfordmfg.com/Patents)
- ASSE 1019 - Type C Listed
- CSA, cUPC Approved
- Not intended for continuous use



FEATURES:

- *Patented resetting pressure relief valve prevents the faucet tube from bursting in freezing conditions even if a hose is unintentionally left on.*




- 3/4" male hose thread nozzle
- Stainless steel seat - eliminates wire draw
- EPDM packing to prevent leaking
- Full circle operating threads on valve body and retainer
- No-lead solder
- Standard "O" size seat washer
- Oval, powder-coated, die cast aluminum handle
- Optional Tee Key available (extra charge)
- Adjustable polycarbonate wall flange
- **MAX PRESSURE** - 125 p.s.i.

INSTALLATION REQUIREMENTS:

- The faucet length used is to be comparable to what would be used with standard freezeless faucets.
- The inlet connection must be located in a heated area.
- The gap between the house and faucet must be sealed to prevent air leaks.
- The faucet must be installed with a slight downward pitch toward the nozzle.
- Adequate insulation is required around the faucet, wall board and sill plate.

**For Installation / Troubleshooting Instructions go to
www.woodfordmfg.com or call 1-800-621-6032**

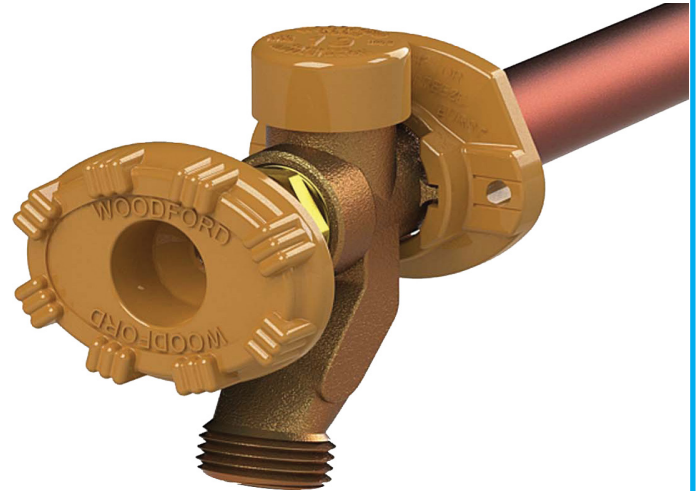

Inlet Descriptions

| | |
|--|--|
| | <p>C Inlet COMBINATION Copper Sweat Fitting 1/2" K, L or M Inside 3/4" M Only Outside</p> |
| | <p>CP Inlet COMBINATION 1/2" Male Pipe Thread 1/2" Female Sweat</p> |
| | <p>C3 Inlet 3/4" Female Sweat Fitting</p> |
| | <p>P Inlet COMBINATION 1/2" Female Pipe Thread 3/4" Male Pipe Thread</p> |
| | <p>PX Inlet 1/2" PEX Tube Fitting</p> |
| | <p>PX3 Inlet 3/4" PEX Tube Fitting</p> |
| | <p>W Inlet 1/2" Wirsbo® Tube Fitting</p> |
| | <p>W3 Inlet 3/4" Wirsbo® Tube Fitting</p> |
| | <p>R Inlet 1/2" Rehau® Tube Fitting</p> |
| | <p>CM Inlet COMBINATION 1/2" Compression Fitting 1/2" Copper Sweat Fitting</p> |

When ordering, specify model , inlet and wall thickness.