



Woodford Utility Yard Hydrants are intended for irrigation purposes and designed for use where year-round availability of water is required. Sturdy construction make these hydrants rugged and dependable. Accidental damage and vandalism are minimized. Hydrants are available with choice of automatic close or manual close lever handle.

# Freezeless UTILITY Yard Hydrants U34 / U75 3/4" FPT Inlet

## SUGGESTED USES:

Chemical plants; oil refineries; outdoor paved areas of schools, factories and office buildings; wading pools; outdoor ice rinks; stock and water tanks.

## Features:

- Automatic draining occurs through 1/8" NPT drain hole when hydrant is shut off to prevent freezing.
- Outlet can be located at any height above ground level. Adjust bury depth accordingly.
- All working parts are removable through the top of the hydrant.
- Lever handles can be easily removed to prevent unauthorized usage.

## Specifications:

**INLET:** 3/4" FPT Brass Valve Body

**OUTLET:** Model U34: 3/4" Brass Hose Thd. Spout

Model U75: 3/4" FPT Galvanized Tee

**HANDLES:** Almag casting (see descriptions below)


**(A) Automatic closing lever handle** should be used in public places where supervision is inadequate to assure shut-off of water.

**(M) Manual closing lever handle** should be installed where water is continuously used over a period of time.

**OPERATING ROD:** 1/4" Stainless steel pipe

**CASING:** 1" Galvanized pipe

**MAX. PRESSURE:** 125 PSI

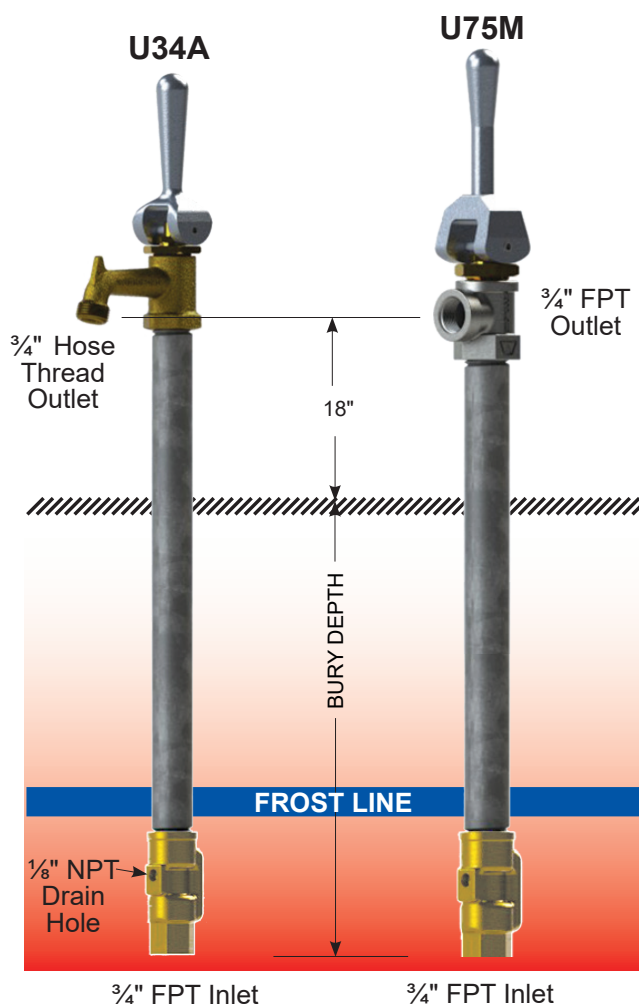

## SHIPPING WEIGHT

Bury Depth (Ft)	1	2	3	4	5	6	7
Weight U34 (lbs)	9	11	13	15	17	19	21
Weight U75 (lbs)	8	10	12	14	16	18	20

