

FEATURES

- · Three hole top mount installation
 - Three 1-1/2" (38mm) faucet holes required
 - Maximum countertop thickness 1-3/4" (44mm)
- Single-lever faucet with retractable spray head and hose
- · 360° swing spout
- · Ceramic disc cartridge
- · Solid brass construction
- Flexible braided stainless steel supply hoses with 3/8" (10mm) compression female adapters
- · Available in the following finishes

Brushed nickel
 Chrome
 Oil rubbed bronze
 Oil rubbed bronze with terra cotta color ring

LK9402RB
LK9402RBC

- Ship Wt. 11 lbs. (5Kg)
- Due to the weight of this faucet, Elkay recommends that it be installed to an 18" (457mm) gauge stainless steel sink (or heavier) or to a solid surface countertop
- · Maximum flow rate
 - 2.5 GPM/9.5 L/min at 80 P.S.I.G.
 - 2.2 GPM/8.3 L/min at 60 P.S.I.G.

WARRANTY

· Limited Lifetime

COMPLIES WITH:

- ADA
- ANSI/NSF61 Certified
- ASME 112.18.1/CSA B125.1 Certified

5-1/4"


(133mm)


2"

(51mm) [→]

• CA AB1953/VT S152









2-1/2"

(64mm)

Explore[™] Single Handle Kitchen Faucet Model LK9402






SEE OTHER SIDE FOR REPLACEMENT PARTS



Explore[™] Single Handle Kitchen Faucet Model LK9402

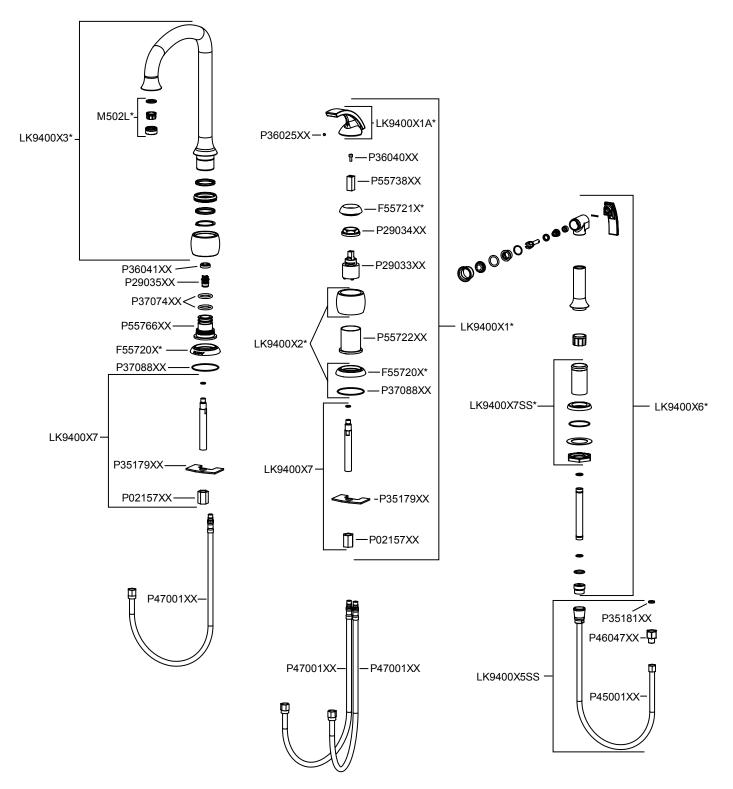

NOTE: * - REQUIRES FINISH DESIGNATION