



# TurboShear™

## Shear Power for Fiber Cement Siding

Make your drill a Fiber Cement Siding Shear!  
Versatile and Portable. Cuts 5/16" (8 mm) Fiber Cement Siding Plank with minimal dust!




**New!  
in 2011**



TSF1

- Lightweight Shear head for easy one-hand control.
- Long lasting blades make fast, clean trim cuts and mild arcs in fiber cement siding anywhere on the job.
- No. TSDC Drill clamp included for one-hand operation.
- Minimum 14.4 volt 3/8" (9.53 mm) Cordless or Corded Drill required.

*New Streamlined Design*

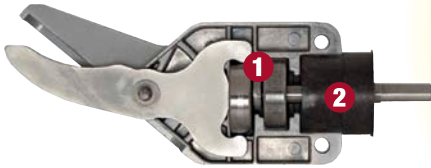

1. Long-life, dual ball bearings 2. Non-slip flats on drive shaft.



*New Telescoping Drill Clamp  
adjusts to fit any corded or cordless drill,  
including compact Lithium-ion models.*




TSDC

*Cordless Drill Not Included.*

### Specifications

Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSF1	TurboShear, Fiber Cement	—	3.03 (1.67)
<b>Replacement Parts</b>			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Heavy-Duty Chuck Guard	—	.06 (0.03)
TSF1RBN	TurboShear Replacement Blades for TSF1 shown above	—	—
TSF1RB	TurboShear Replacement Blades for original TSF1	—	—



**WARNING:** Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.