



The Woodford Model 27 drains as handle is shut off even if hose is attached. This faucet is designed for residential outside water service applications and intended for irrigation purposes.

SPECIFICATIONS:
MODEL 50HA BACKFLOW PREVENTER -
Patent Pending


- ASSE 1052 Approved
- Listed by IAPMO
- Field Testable
- Two Independent Check Valves
- Drains automatically when hose is removed
- No spray back



FEATURES:

- EXTERIOR FINISH** - Brass
- VALVE** - Molded nitrile suitable for hot water.
- NOZZLE** - 3/4" male hose thread.
- NO LEAD SOLDER** - All solder joints.
- PLUNGER** - Hemispherical cushion type.
- STEM SCREW** - DELRIN®
- HEAD NUT** - Brass
- HANDLE** - Metal. (Optional Tee Key)
- INLETS** - As shown.
- MAX PRESSURE** - 125 p.s.i.
- MAX TEMPERATURE** - 120° F

NOTICE - To close and drain, turn handle clockwise until seated and water drains out of the drain hole or faucet may freeze and burst. Backflow Preventer replacement is recommended every 3-5 years.

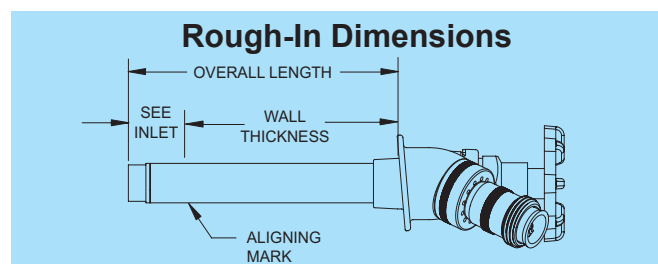

Wall Thickness (inches)										
4	6	8	10	12	14	16	18	20	22	24
2.2	2.3	2.4	2.5	2.6	2.7	2.9	3.1	3.3	3.5	3.7
Shipping Wt. (lbs)										

Approx. Shipping Weight Each
 *Overall Length Dimension: Add wall thickness and inlet option length shown in chart above.

Patent informaion available at :
<http://www.woodfordmfg.com/Woodford/patents/>
For Installation / Troubleshooting Instructions go to:
www.woodfordmfg.com or call 1-800-621-6032

Backflow Protected Automatic Draining Freezeless Wall Faucet Model 27



Inlet Descriptions

	<p>C Inlet COMBINATION Copper Sweat Fitting 1/2" K, L or M Inside 3/4" M Only Outside</p>
	<p>CP Inlet COMBINATION 1/2" Male Pipe Thread 1/2" Female Sweat</p>
	<p>CP3 Inlet COMBINATION 3/4" Male Pipe Thread 3/4" Female Sweat</p>
	<p>P Inlet COMBINATION 1/2" Female Pipe Thread 3/4" Male Pipe Thread</p>
	<p>PX Inlet 1/2" PEX Tube Fitting</p>
	<p>PX3 INLET 3/4" PEX Tube Fitting</p>

When ordering, specify model , inlet and wall thickness.