


PEERLESS

P188624LF Min. 2 1/2" (64 mm) 127 mm) Clearance to Back Splash Recommended 6 11/16 (171mm) 4 13/16" (122 mm) (94 mm) 2 1/2" (64 mm) (150 mm) (31~38 mm) (40 mm) Hole Size Max. Deck 30" Thickness (761mm) 9/16-24 UNEF

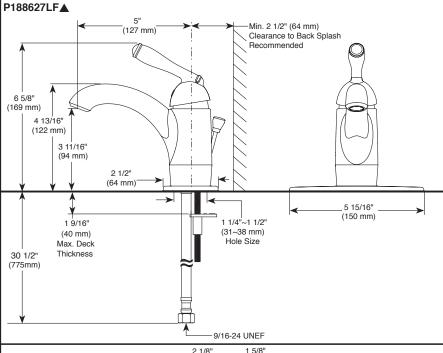

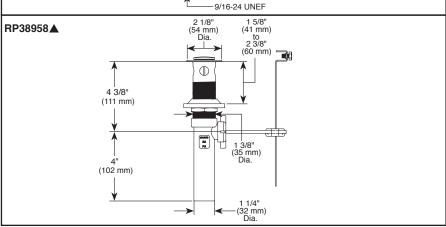

P188624LF▲ P188627LF



BATHROOM FAUCET:

- Single Handle Deck Mount
- 1 or 3 Hole Sink Applications

STANDARD SPECIFICATIONS:

- Maximum 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- One or three hole mount (escutcheon optional, included)
- Control mechanism is ceramic disc cartridge
- 30" (761 mm) long nylon braided hoses with 9/16-24 UNEF threaded female inlet adapters
- Red/blue indicator markings
- Solid brass body
- Models have 50/50 pop-up type fitting with plated flange and stopper

WARRANTY:

 Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compact ICC / ANSI A117.1 Indicates compliance to
- EPA WaterSense®