



PRODUCT CATALOG

DEWALT[®]
GUARANTEED TOUGH.[®]

TABLE OF CONTENTS

CORDLESS POWER TOOLS

12V & 20V MAX* Chargers	23
12V MAX* Combo Kits	22
18V Combo Kits	20
20V MAX* Combo Kits	19
36V Combo Kits	19
Adhesive Dispensers	16
Band Saws	16
Batteries & Chargers	23
Bi-Metal Cordless Bandsaw Blades	16
Charger/Radio	22
Circular Saws	13
Concrete Vibrator	14
Cut-Off Tools	15
Cut-Out Tool	12
Drill/Drivers	5
Flashlights	17
Floodlights	17
Hammerdrills	4
Heated Gear	18
Impact Drivers	7
Impact Wrenches	8
Instruments	17
Jig Saws	13
Metal Cutting Saws	13
Nailers	15
Reciprocating Saws	14
Right Angle Drills	10
Rotary Lasers	18
Screwdrivers	10
SDS Rotary Hammers	12
Shears	15
Vacuums	18
Work Lights	17

CORDED POWER TOOLS

Air Distribution	47
Angle Grinders - Small, Medium & Large	39
Band Saws	41
Biscuits	42
Chipping Hammers	36
Chop Saws	41
Circular Saws	28
Compressors	46
Cut-Off Machines	41
Cut-Out Tool	32
Demolition Hammers	36
Die Grinders	40
Drills - VSR, Electronic Clutch & Specialty	33
Dust Extraction for Grinders	37
Dust Extraction for Large Rotary Hammers	37
Dust Extractor Attachments & Connectors	38
Dust Extractor Vacuums	38
Flooring Tool	45
Grinder Accessories	40
Grinders - Bench & Straight	40
Hammerdrills	34
Hand Planers	44
Handheld Tile Saw	29
Heat Guns	44
Impact Wrenches	32
Jig Saws	28
Laminate Trimmers	42
Measurer	44, 108
Miter Saw Stands	30
Miter Saws	30
Multi-Cutter® Saw	41
Multi-Tool	28
Nailers (Pneumatic)	45
Nibblers	41
Pavement Breaker	36
Plate Joiner & Plate Joiner Blade	42
Polishers	40
Random Orbital Sanders	42
Reciprocating Saws	28
Routers & Router Accessories	43
Sanding Pads	42
Screwdrivers	31
Scroll Saws	28
SDS MAX Rotary Hammers	35
SDS Rotary Hammers	34
Shears	41
Spline Rotary Hammers	35
Staplers	46
Table Saws	29
Thickness Planers	44
Tile Saws	29
Track Saws	29

HAND TOOLS

Clamps - Bar Clamps (Small, Medium & Large)	119
Clamps - Bar Clamps (Rapid Return)	119
Cutting Tools - 5-in-1 Hacksaw & Blades	117
Cutting Tools - Flush Cut Saw	117
Cutting Tools - Jab Saws (Folding & Standard)	117
Cutting Tools - Multi-Purpose Saw	117
Cutting Tools - Panel Saws	118
Cutting Tools - Knives & Blades	115-116
Glue Gun & Riveter	114
Hammers	120
Hex Keys (Folding Locking)	123
Hex Keys (Ratcheting T Handle)	123
Laser Distance Measurers	108
Laser Levels	106-107
Laser Level Accessories	109-110
Marking & Layout - Chalk, Chalk Reels / Kits	104
Marking & Layout - Premium Rafting Square	104
Marking & Layout - Levels	105
Measuring Tools - Short Tapes & Long Tapes	103
Multi Tools	119
Nail Sets	121
Optical Levels	107
Pliers	122-123
Pry Bars	121
Screwdriver & Screwdriver Sets	112
Staplers & Staples	113-114
Wood Chisel & Side Strike Chisel	120
Wrenches	123

ACCESSORIES

Adapter - Backing Flange & Spindle	72
Bandsaw Blades - Bi-Metal Portable	100
Belts	63
Cartridge Roll Mandrels	72
Cartridge Rolls - Aluminum Oxide (High Performance)	64
Construction Saw Blades	75
Diamonds - Cup Grinding Wheels (Extended Performance)	68
Diamonds - Blades	68
Drilling - Concrete & Masonry	79
Drilling - Impact Ready®	86
Drilling - Industrial Metal	89
Drilling - Metal & Wood	90
Drilling - Step Bits	92
Drilling - Wood	92
Fastening - Impact Ready®	84
Fastening	94
Fiber Disc Backing Pads	72
Fiber Discs	59
Flap Wheels	60
Hand Pad Handle	72
Hole Saws - Bi-Metal, Mandrels & Sets	99-100
Hook & Loop Backing Pads - Disc	72
Jig Saw Blades	100
Mandrels - Quick Change	72
Metal Cutting Saw Blades	76
Non-Woven Discs, Flap Discs & Hand Pads	67
Paper Discs - 5" & 6" Hook & Loop Random Orbit Discs	64
Power Strip Discs	66
Polishing	70
Precision Saw Blades - PrecisionFraming™ & PrecisionTrim™	74
Quick Change - Drill Drive, Rapid Load® & Sets	96
Quick Change Discs	63
Reciprocating Saw Blades	97
Rolls - Paper Rolls Aluminum Oxide	64
Sheets - Waterproof Sheets Silicon Carbide	65
Shop Rolls	65
Steel Circular Saw Blades	78
Type 1 Bonded Abrasives - Cutting Wheels	51
Type 1 Bonded Abrasives - High Speed Wheels	53
Type 11 Bonded Abrasives - Cup Wheels	57
Type 27 Bonded Abrasives - Cutting Wheels	54
Type 27 Bonded Abrasives - Grinding Wheels	54
Type 27 Bonded Abrasives - Masonry Wheels	56
Type 27 Bonded Abrasives - Metal Cutting & Grinding	55
Type 27 Bonded Abrasives - Stainless Wheels	56
Type 27 Flap Discs	58
Type 28 Bonded Abrasives - Grinding Wheels	57
Type 29 Flap Discs	58
Wire Brushes	71
Woodworking Saw Blades	76

STORAGE

Adjustable Leg Saw Horse	126
Mobile Work Station	125
One Touch Box	126
Tote with Power Tool Case	125
Tote with Removable Organizer	125
ToughSystem®	124
TSTAK®	124
Water Seal Tool Box	126

AUTOMOTIVE

Air Tools	140
Combination Wrench Sets	129
Drive Sockets	133-138
Drive Socket Sets	130-131
Mechanics Tool Sets	129
Metal Storage	140
Ratchets	129
Reversible Ratcheting Wrench Sets	129
Sockets Accessories	139
Socket Sets	129
Wrenches	132-133

With respect to 8V MAX* - * - Maximum initial battery voltage (measured without a workload) is 8 volts. Nominal voltage is 7.2.

With respect to 12V MAX* - * - Maximum initial battery voltage (measured without a workload) is 12 volts. Nominal voltage is 10.8.

With respect to 20V MAX* - * - Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.



The descriptions, specifications and other claims made with respect to the products featured in this catalogue are made as of the date of printing. DeWALT retains the right to discontinue production of or make changes to any of its products without notice. Product packaging and other product literature should be consulted for current descriptions, specifications and other claims relating to DeWALT products. Changes to products shall not obligate DeWALT to make corresponding changes to products previously manufactured or sold.

CORDLESS POWER TOOLS

DeWALT®

GUARANTEED TOUGH.®

20V MAX LITHIUM ION SYSTEM



GUARANTEED TOUGH.®

HAMMER DRILLS



36V Lithium Ion 1/2" (13 mm) Hammerdrill/Drill/Driver Kit



20V MAX* XR Lithium Ion Brushless Premium Hammerdrill Kit



20V MAX* XR Lithium Ion Brushless Premium Hammerdrill (Tool Only)



20V MAX* Lithium Ion Premium 3-Speed Hammerdrill Kit

SPECIFICATIONS	DC901KL	DCD995M2	DCD995B	DCD985M2
Volts	36V	20V MAX*	20V MAX*	20V MAX*
Max Power	750 UWO	650 UWO	650 UWO	535 UWO
# of Speed Settings	3	3	3	3
No Load Speed	—	—	—	—
Max RPM	0-400 / 0-1,200 / 0-1,600 rpm	0-450 / 0-1,300 / 0-2,000 rpm	0-450 / 0-1,300 / 0-2,000 rpm	0-575 / 0-1,350 / 0-2,000 rpm
Max BPM	0-6,800 / 0-20,400 / 0-27,200 bpm	0-7,650 / 0-22,100 / 0-34,000 bpm	0-7,650 / 0-22,100 / 0-34,000 bpm	0-9,775 / 0-22,950 / 0-34,000 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, self-tightening	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	6.7 lbs	4.7 lbs	3.4 lbs (tool only)	5.2 lbs
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)
Includes	360° side handle	360° side handle	360° side handle	360° side handle



20V MAX* XR Premium 3-Speed Hammerdrill (Tool Only)



18V XRP™ Lithium Ion 1/2" (13 mm) Hammerdrill/Drill/Driver Kit



20V MAX* XR Lithium Ion Brushless Compact Hammerdrill Kit

SPECIFICATIONS	DCD985B	DCD970KL	DCD795D2
Volts	20V MAX*	18V	20V MAX*
Max Power	535 UWO	450 UWO	360 UWO
# of Speed Settings	3	3	2
No Load Speed	—	—	—
Max RPM	0-575 / 0-1,350 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-600 / 0-2,000 rpm
Max BPM	0-9,775 / 0-22,950 / 0-34,000 bpm	0-8,500 / 0-21,250 / 0-34,000 bpm	0-10,200 / 0-34,000 bpm
Chuck Size	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	3.9 lbs (tool only)	5.2 lbs	3.6 lbs
Charger/Batteries	Sold Separately	1-Hour Nicd/NiMH/Li-Ion charger / (2) 18V XRP™ Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)
Includes	360° side handle	360° side handle	On-board bit tip holder & belt hook



20V MAX* Lithium Ion Compact Hammerdrill Kit



18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver Kit



18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver Kit



18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver (Tool Only)

SPECIFICATIONS	DCD785C2	DCD959KX	DCD950KX	DCD950B
Volts	20V MAX*	18V	18V	18V
Max Power	350 UWO	420 UWO	450 UWO	450 UWO
# of Speed Settings	2	3	3	3
Max RPM	0-600 / 2,000 rpm	0-450 / 0-1,450 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm
Max BPM	0-10,200 / 0-34,000 bpm	0-7,650 / 0-24,650 / 0-34,000 bpm	0-8,500 / 0-21,250 / 0-34,000 bpm	0-8,500 / 0-21,250 / 0-34,000 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	3.5 lbs	6.0 lbs	6.2 lbs	3.9 lbs (tool only)
Charger/Batteries	Fast Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	1-Hour Charger / (2) 18V XRP™	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	On-board bit tip holder & belt hook	360° side handle	360° side handle	360° side handle



18V Compact Lithium Ion 1/2" (13 mm) Hammerdrill Kit



18V Compact 1/2" (13 mm) Hammerdrill (Tool Only)



18V Compact 1/2" (13 mm) Hammerdrill Kit




14.4V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver Kit

SPECIFICATIONS	DCD775KL	DCD775B	DC725KA	DCD930KX
Volts	18V	18V	18V	14.4V
Max Power	350 UWO	350 UWO	410 UWO	325 UWO
# of Speed Settings	2	2	2	3
Max RPM	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm	0-425 / 0-1,200 / 0-1,800 rpm
Max BPM	0-8,500 / 0-29,000 bpm	0-8,500 / 0-29,000 bpm	0-8,500 / 0-29,000 bpm	0-7,225 / 0-20,400 / 0-30,600 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	4.1 lbs (tool only)	3.1 lbs (tool only)	4.9 lbs	5.7 lbs
Charger/Batteries	30-Minute Charger / (2) 18V Compact Lithium Ion	Sold Separately	1-Hour Charger / (2) 18V	1-Hour Charger / (2) 14.4V XRP™
Includes	—	—	—	360° side handle


DRILL/DRIVERS



SPECIFICATIONS	DCD990M2	DCD980M2	DCD940KX	DCD960KL	DCD790D2
Volts	20V MAX*	20V MAX*	18V	18V	20V MAX*
Max Power	650 UWO	535 UWO	450 UWO	450 UWO	360 UWO
# of Speed Settings	3	3	3	3	2
Max RPM	0-575 / 0-1,350 / 0-2,000 rpm	0-575 / 0-1,350 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-600 / 0-2,000 rpm
Chuck Size	1/2"	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	4.6 lbs	5.2 lbs	6.2 lbs	5.2 lbs	3.5 lbs
Charger/Batteries	1-Hour Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	1-Hour Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	1-Hour Charger / (2) 18V XRP™	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)
Includes	On-board bit tip holder & belt hook and 360° side handle	360° side handle	360° side handle	360° side handle	On-board bit tip holder & belt hook

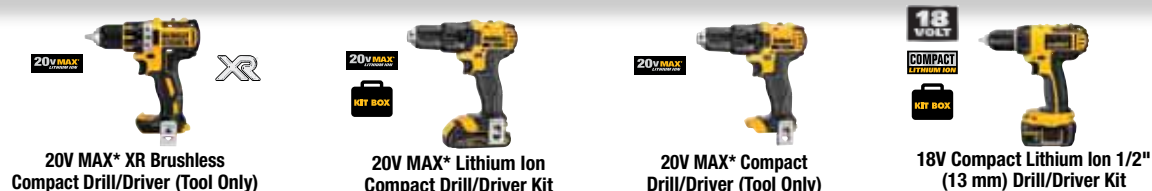

SPECIFICATIONS	DCD790B	DCD780C2	DCD780B	DCD760KL
Volts	20V MAX*	20V MAX*	20V MAX*	18V
Max Power	360 UWO	350 UWO	350 UWO	350 UWO
# of Speed Settings	2	2	2	2
Max RPM	0-600 / 2,000 rpm	0-600 / 2,000 rpm	0-600 / 2,000 rpm	0-500 / 0-1,700 rpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Ratcheting	Ratcheting	Plastic, ratcheting
Weight	2.6 lbs (tool only)	3.4 lbs	2.7 lbs (tool only)	4.0 lbs
Charger/Batteries	Sold Separately	30-Minute Fast Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately	30-Minute Charger, (2) 18V Compact Lithium Ion
Includes	On-board bit tip holder & belt hook	On-board bit tip holder & belt hook	On-board bit tip holder & belt hook	—

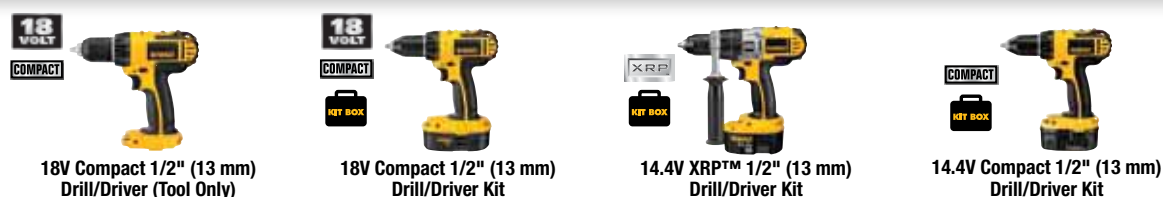

SPECIFICATIONS	DCD760B	DC720KA	DCD920KX	DC730KA
Volts	18V	18V	14.4V	14.4V
Max Power	350 UWO	410 UWO	325 UWO	300 UWO
# of Speed Settings	2	2	3	2
Max RPM	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm	0-425 / 0-1,200 / 0-1,800 rpm	0-400 / 0-1,450 rpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Plastic, ratcheting	Plastic, ratcheting	Metal, ratcheting	Plastic, ratcheting
Weight	3.0 lbs (tool only)	4.8 lbs	5.7 lbs	4.3 lbs
Charger/Batteries	Sold Separately	1-Hour Charger / (2) 18V	1-Hour Charger / (2) 14.4V XRP™	1-Hour Charger / (2) 14.4V



SPECIFICATIONS	DCD710S2	DCD910KX	DC742KA	DC750KA
Volts	12V MAX*	12V	12V	9.6V
Max Power	189 UWO	285 UWO	200 UWO	130 UWO
Max RPM	0-400 / 0-1,500 rpm	0-425 / 0-1,200 / 0-1,800 rpm	0-400 / 0-1,450 rpm	0-300 / 0-1,100 rpm
Chuck Size	3/8"	1/2"	3/8"	3/8"
Chuck Type	Plastic, ratcheting	Metal, ratcheting	Plastic, ratcheting	Plastic, ratcheting
Weight	2.4 lbs	5.2 lbs	3.8 lbs	3.4 lbs
Charger/Batteries	Fast Charger, (2) 12V MAX* Lithium Ion	1-Hour Charger / (2) 12V XRP™	Fast Charger / (2) 12V	1-Hour Charger / (2) 9.6V
Includes	(1) belt hook	—	—	—

IMPACT DRIVERS



**20V MAX* XR Lithium Ion
Brushless 1/4" (6.35 mm)
3-Speed Impact Driver**



**20V MAX* XR Lithium Ion
Brushless 1/4" (6.35 mm)
3-Speed Impact Driver**



**20V MAX* XR Brushless
1/4" (6.35 mm) 3-Speed
Impact Driver (Tool Only)**



**20V MAX* XR Lithium Ion
Brushless 1/4" (6.35 mm)
Impact Driver Kit**

SPECIFICATIONS	DCF895M2	DCF895D2	DCF895B	DCF886M2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/4" Hex shank push-button release	1/4" Hex shank push-button release	1/4" Hex shank push-button release	1/4" Hex shank quick release
No Load Speed	0 - 2,850 / 1,900 / 950 rpm	0 - 2,850 / 1,900 / 950 rpm	0 - 2,850 / 1,900 / 950 rpm	0 - 2,800 rpm
Impacts/Min	0 - 3,300 / 2,400 / 1,300 ipm	0 - 3,300 / 2,400 / 1,300 ipm	0 - 3,300 / 2,400 / 1,300 ipm	0 - 3,200 ipm
Max Torque (in-lbs)	1,500 / 900 / 500 in-lbs	1,500 / 900 / 500 in-lbs	1,500 / 900 / 500 in-lbs	1,500 in-lbs
Max Torque (ft-lbs)	125 ft-lbs	125 ft-lbs	125 ft-lbs	125 ft-lbs
Tool Length	5-1/4"	5-1/4"	5-1/4"	5.5"
LEDs	3	3	3	3
Weight	3.6 lbs	3.0 lbs	2.2 lbs (tool only)	3.4 lbs
Charger/Batteries	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)
Includes	Belt hook and accessory storage	Belt hook and accessory storage	Belt hook and accessory storage	Belt hook



**20V MAX* XR Lithium Ion
Brushless 1/4"
(6.35 mm) Impact Driver Kit**



**20V MAX* XR Brushless
1/4" (6.35 mm) Impact Driver
(Tool Only)**



**20V MAX* Lithium Ion 1/4"
(6.35 mm) Impact Driver Kit**



**20V MAX* Lithium Ion 1/4"
(6.35 mm) Impact Driver Kit**

SPECIFICATIONS	DCF886D2	DCF886B	DCF885M2	DCF885C2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/4" Hex shank quick release	1/4" Hex shank quick release	1/4" Hex shank quick release	1/4" Hex shank quick release
No Load Speed	0 - 2,800 rpm	0 - 2,800 rpm	2,800 rpm	2,800 rpm
Impacts/Min	0 - 3,200 ipm	0 - 3,200 ipm	3,200 ipm	3,200 ipm
Max Torque (in-lbs)	1,500 in-lbs	1,500 in-lbs	1,400 in-lbs	1,400 in-lbs
Max Torque (ft-lbs)	125 ft-lbs	125 ft-lbs	117 ft-lbs	117 ft-lbs
Tool Length	5.5"	5.5"	5.5"	5.5"
LEDs	3	3	3	3
Weight	2.9 lbs	2.1 lbs (tool only)	3.4 lbs	2.8 lbs
Charger/Batteries	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)
Includes	Belt hook	Belt hook	Belt hook	Belt hook



**20V MAX* 1/4" (6.35 mm)
Impact Driver (Tool Only)**



**18V XRP™ Lithium Ion 1/4"
(6.35 mm) Impact Driver Kit**



**18V XRP™ 1/4"
(6.35 mm) Impact Driver Kit**

SPECIFICATIONS	DCF885B	DC827KL	DC825KA
Volts	20V MAX*	18V	18V
Drive Size	1/4" Hex shank quick release	1/4" Hex shank quick release	1/4" Hex shank quick release
No Load Speed	2,800 rpm	0-2,400 rpm	0-2,400 rpm
Impacts/Min	3,200 ipm	0-2,700 ipm	0-2,700 ipm
Max Torque (in-lbs)	1,400 in-lbs	1,330 in-lbs	1,330 in-lbs
Max Torque (ft-lbs)	117 ft-lbs	111 ft-lbs	111 ft-lbs
Tool Length	5.5"	5-3/4"	5-3/4"
LEDs	3	1	1
Weight	2.0 lbs (tool only)	3.2 lbs	4.6 lbs
Charger/Batteries	Sold Separately	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™
Includes	Belt hook	-	-

IMPACT DRIVERS



**18V 1/4" (6.35 mm)
Impact Driver (Tool Only)**



**14.4V XRP™ 1/4" (6.35 mm)
Impact Driver Kit**



**12V MAX* Lithium Ion
1/4" (6.35 mm) Impact Driver Kit**



**12V XRP™ 1/4" (6.35 mm)
Impact Driver Kit**

SPECIFICATIONS	DC825B	DC835KA	DCF815S2	DC845KA
Volts	18V	14.4V	12V MAX*	12V
Drive Size	1/4" Hex shank quick release	1/4" Hex shank quick release	1-Handed loading, 1/4" hex chuck	1/4" Hex shank quick release
No Load Speed	0-2,400 rpm	0-2,400 rpm	0-2,450 rpm	0-2,400 rpm
Impacts/Min	0-2,700 ipm	0-2,700 ipm	0-3,400 ipm	0-2,700 ipm
Max Torque (in-lbs)	1,330 in-lbs	1,240 in-lbs	950 in-lbs	1,150 in-lbs
Max Torque (ft-lbs)	111 ft-lbs	103 ft-lbs	79 ft-lbs	96 ft-lbs
Tool Length	5-3/4"	5-3/4"	6-1/4"	5-3/4"
LEDs	1	1	3	1
Weight	2.2 lbs (tool only)	3.9 lbs	2.3 lbs	3.6 lbs
Charger/Batteries	Sold Separately	1-Hour Charger / (2) 14.4V XRP™	Fast Charger / (2) 12V MAX* Lithium Ion	1-Hour Charger / (2) 12V XRP™
Includes	-	-	(1) Belt hook	-

IMPACT WRENCHES



**36V Lithium Ion 1/2" (13 mm)
Impact Wrench Kit**



**20V MAX* Lithium Ion 1/2" (13 mm)
Impact Wrench Kit with Detent
Pin Anvil**



**20V MAX* 1/2" (13 mm) Impact
Wrench with Detent Pin Anvil
(Tool Only)**



**20V MAX* Lithium Ion 1/2" (13 mm)
Impact Wrench Kit with Hog Ring Anvil**

SPECIFICATIONS	DC800KL	DCF889M2	DCF889B	DCF889HM2
Volts	36V	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ hog ring anvil
Max Torque (in-lbs)	3,900 in-lbs	4,800 in-lbs	4,800 in-lbs	4,800 in-lbs
Max Torque (ft-lbs)	325 ft-lbs	400 ft-lbs	400 ft-lbs	400 ft-lbs
No Load Speed	1,400 rpm	0-1,500 rpm	0-1,500 rpm	0-1,500 rpm
Impacts/Minute	2,500 ipm	0-2,300 ipm	0-2,300 ipm	0-2,300 ipm
Switch	Rocker	Variable Speed	Variable Speed	Variable Speed
Weight	7.5 lbs	6.7 lbs	5.3 lbs (tool only)	6.7 lbs
Tool Length	10-3/4"	10-3/4"	10-3/4"	10-3/4"
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)



**18V XRP™ Lithium Ion 1/2" (13 mm)
Impact Wrench Kit**



**18V XRP™ 1/2" (13 mm) High
Torque Impact Wrench Kit
with Detent Pin Anvil**



**18V 1/2" (13 mm) High Torque
Impact Wrench with
Detent Pin Anvil (Tool Only)**



**18V XRP™ 1/2" (13 mm) High
Torque Impact Wrench Kit
with Hog Ring Anvil**

SPECIFICATIONS	DCF059KL	DW059K-2	DW059B	DW059HK-2
Volts	18V	18V	18V	18V
Drive Size	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ hog ring anvil
Max Torque (in-lbs)	3,600 in-lbs	3,600 in-lbs	3,600 in-lbs	3,600 in-lbs
Max Torque (ft-lbs)	300 ft-lbs	300 ft-lbs	300 ft-lbs	300 ft-lbs
No Load Speed	0-1,650 rpm	1,650 rpm	1,650 rpm	1,650 rpm
Impacts/Minute	0-2,600 ipm	2,600 ipm	2,600 ipm	2,600 ipm
Switch	Rocker	Rocker	Rocker	Rocker
Weight	6.1 lbs	7.5 lbs	5.3 lbs (tool only)	7.5 lbs
Tool Length	10-3/4"	10-3/4"	10-3/4"	10-3/4"
Charger/Batteries	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™	Sold Separately	1-Hour Charger / (2) 18V XRP™

IMPACT WRENCHES



18V 1/2" (13 mm) High Torque Impact Wrench with Hog Ring Anvil (Tool Only)



18V XRP™ 1/2" (13 mm) Impact Wrench Kit with Detent Pin Anvil



18V 1/2" (13 mm) Impact Wrench with Detent Pin Anvil (Tool Only)



20V MAX* Lithium Ion 1/2" (13 mm) Impact Wrench Kit with Detent Pin

SPECIFICATIONS	DW059HB	DC821KA	DC821B	DCF880M2
Volts	18V	18V	18V	20V MAX*
Drive Size	1/2" Square w/ hog ring anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil
Max Torque (in-lbs)	3,600 in-lbs	1,920 in-lbs	1,920 in-lbs	1,800 in-lbs
Max Torque (ft-lbs)	300 ft-lbs	160 ft-lbs	160 ft-lbs	150 ft-lbs
No Load Speed	1,650 rpm	0-2,100 rpm	0-2,100 rpm	0-2,300 rpm
Impacts/Minute	2,600 ipm	0-3,000 ipm	0-3,000 ipm	0-2,700 ipm
LEDs	-	-	-	3
Weight	5.3 lbs (tool only)	5.3 lbs	2.9 lbs (tool only)	3.4 lbs
Tool Length	10-3/4"	7-5/8"	7-5/8"	5.7"
Charger/Batteries	Sold Separately	1-Hour Charger / (2) 18V XRP™	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)



20V MAX* 1/2" (13 mm) Impact Wrench with Detent Pin (Tool Only)



20V MAX* Lithium Ion 1/2" (13 mm) Impact Wrench Kit with Hog Ring Anvil



20V MAX* Lithium Ion 3/8" (9.5 mm) Impact Wrench with Hog Ring Kit



20V MAX* 3/8" (9.5 mm) Impact Wrench with Hog Ring (Tool Only)

SPECIFICATIONS	DCF880B	DCF880HM2	DCF883M2	DCF883B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/2" Square w/ detent pin anvil	1/2" Square w/ hog ring anvil	3/8" Square w/ hog ring anvil	3/8" Square w/ hog ring anvil
Max Torque (in-lbs)	1,800 in-lbs	1,800 in-lbs	1,560 in-lbs	1,560 in-lbs
Max Torque (ft-lbs)	150 ft-lbs	150 ft-lbs	130 ft-lbs	130 ft-lbs
No Load Speed	0-2,300 rpm	0-2,300 rpm	0-2,300 rpm	0-2,300 rpm
Impacts/Minute	0-2,700 ipm	0-2,700 ipm	0-2,700 ipm	0-2,700 ipm
LEDs	3	3	3	3
Weight	2.2 lbs (tool only)	3.4 lbs	3.4 lbs	2.2 lbs (tool only)
Tool Length	5.7"	5.7"	5.7"	5.7"
Charger/Batteries	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately

IMPACT WRENCHES



18V XRP™ Lithium Ion 1/2" (13 mm) Impact Wrench Kit



18V XRP™ 1/2" (13 mm) Impact Wrench Kit



18V 1/2" (13 mm) Impact Wrench (Tool Only)



18V XRP™ 3/8" (9.5 mm) Impact Wrench Kit

SPECIFICATIONS	DC822KL	DC820KA	DC820B	DC823KA
Volts	18V	18V	18V	18V
Drive Size	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	3/8" Square w/ hog ring anvil
Max Torque (in-lbs)	1,740 in-lbs	1,740 in-lbs	1,740 in-lbs	1,500 in-lbs
Max Torque (ft-lbs)	145 ft-lbs	145 ft-lbs	145 ft-lbs	125 ft-lbs
No Load Speed	0 - 2,400 rpm	0 - 2,400 rpm	0 - 2,400 rpm	0 - 2,400 rpm
Impacts/Minute	0 - 2,700 ipm	0 - 2,700 ipm	0 - 2,700 ipm	0 - 2,700 ipm
LEDs	1	1	1	1
Tool Length	5-3/4"	5-3/4"	5-3/4"	5-3/4"
Weight	3.2 lbs	4.6 lbs	2.2 lbs (tool only)	4.6 lbs
Charger/Batteries	1-Hour Charger NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™	Sold Separately	1-Hour Charger / (2) 18V XRP™



18V 3/8" (9.5 mm) Impact Wrench (Tool Only)



12V MAX™ Lithium Ion 3/8" (9.5 mm) Impact Wrench Kit

SPECIFICATIONS	DC823B	DCF813S2
Volts	18V	12V MAX*
Drive Size	3/8" square w/ hog ring anvil	3/8" Anvil
Max Torque (in-lbs)	1,500 in-lbs	1,150 in-lbs
Max Torque (ft-lbs)	125 ft-lbs	96 ft-lbs
No Load Speed	0-2,400 rpm	0-2,450 rpm
Impacts/Minute	0-2,700 ipm	0-3,400 ipm
LEDs	1	3
Tool Length	5-3/4"	6-1/4"
Weight	2.2 lbs (tool only)	2.3 lbs
Charger/Batteries	Sold Separately	Fast Charger / (2) 12V MAX* Lithium Ion



RIGHT ANGLE DRILLS



20V MAX™ Lithium Ion 3/8" (9.5 mm) Right Angle Drill/Driver Kit



20V MAX™ 3/8" (9.5 mm) Right Angle Drill/Driver (Tool Only)

SPECIFICATIONS	DCD740C1	DCD740B
Volts	20V MAX*	20V MAX*
Max Power	360 UW0	360 UW0
Chuck Size	3/8"	3/8"
# of Speed Settings	2	2
RPM	0-650/0-2,000 rpm	0-650/0-2,000 rpm
Chuck Type	Plastic, ratcheting	Plastic, ratcheting
Weight	3.8 lbs	3.0 lbs (tool only)
Charger/Batteries	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately
Includes	Belt hook, 2" Phillips bit tip	Belt hook, 2" Phillips bit tip

SCREWDRIVERS



18V XRP™ Light Gauge Steel Framing Screwdriver Kit

SPECIFICATIONS	DC668KA
Volts	18V
Drive Size	1/4"
No Load Speed	0-900 / 0-2,700 rpm
Max Torque (in-lbs)	180 in-lbs
Capacity (CRS)	12-28 gauge
Weight	5.4 lbs
Charger/Batteries	1-Hour Charger / (2) 18V XRP™
Includes	#2 Phillips screwdriver bit, 5/16" nut driver

(continued on next page)



SCREWDRIVERS



**18V XRP™ 1/4" (13 mm)
Drywall/Deck Screwdriver Kit**



**12V MAX* Lithium Ion
1/4" (13 mm) Screwdriver Kit**



**7.2V 1/4" (6.35 mm)
Two-Position Screwdriver Kit**

SPECIFICATIONS	DC520KA	DCF610S2	DW920K-2
Volts	18V	12V MAX*	7.2V
Drive Size	1/4"	1/4"	1/4" Hex
No Load Speed	0 - 900 / 0 - 2,900 rpm	0 - 1,050 rpm	0 - 500 rpm
Chuck	—	1-Handed Loading, 1/4" Hex Chuck	1/4" Hex chuck
Max Torque (in-lbs)	180 in-lbs	—	80 in-lbs
Max Power	—	160 UW0	—
Capacity (CRS)	12 gauge	—	—
LEDs	—	3	—
Length	—	6-1/4"	—
Weight	5.1 lbs	2.2 lbs	3.5 lbs
Charger/Batteries	1-Hour Charger / (2) 18V XRP™	Fast Charger / (2) 12V MAX* Lithium Ion	1-Hour Charger / (2) 7.2V
Includes	Bit tip / magnetic holder, drywall nosepiece, & TEKS® nosepiece	(1) Belt hook	—

SCREWDRIVERS



**8V MAX* Gyroscopic Inline
Screwdriver With Accessory Kit**



**8V MAX* Gyroscopic Screwdriver
With Conduit Reamer Kit**



**8V MAX* Gyroscopic
Screwdriver Kit**

SPECIFICATIONS	DCF682N1	DCF681N2	DCF680N2
Volts	8V MAX*	8V MAX*	8V MAX*
Drive Size	1/4" Hex	1/4" Hex	1/4" Hex
No Load Speed	0 - 430 rpm	0 - 430 rpm	0 - 430 rpm
Chuck	1-Handed Loading, 1/4" Hex Chuck	1-Handed Loading, 1/4" Hex Chuck	1-Handed Loading, 1/4" Hex Chuck
Motion Activated	Yes	Yes	Yes
LEDs	1	3	3
Weight	1.1 lbs	1.25 lbs	1.1 lbs
Charger/Batteries	1-Hour Charger / (1) 8V MAX* Compact Battery	1-Hour Charger / (2) 8V MAX* Compact Batteries	1-Hour Charger / (2) 8V MAX* Compact Batteries
Includes	(31) Piece Screwdriving Set	—	—

With respect to 8V MAX* - *Maximum initial battery voltage (measured without a workload) is 8 volts. Nominal voltage is 7.2.
TEKS® is a registered trademark of Illinois Tool Works, Inc.

SDS ROTARY HAMMERS



36V Lithium Ion SDS Rotary Hammer Kit and Dust Extraction System



36V Lithium Ion 1" (25 mm) SDS Rotary Hammer Kit



20V MAX* Lithium Ion SDS 3-Mode Rotary Hammer Kit



20V MAX* SDS 3-Mode Rotary Hammer (Tool Only)

SPECIFICATIONS	DC233KLDH	DC233KL	DCH253M2	DCH253B
Volts	36V	36V	20V MAX*	20V MAX*
Chuck Type	SDS Plus	SDS Plus	SDS Plus	SDS Plus
No Load Speed	0 - 1,150 rpm	0 - 1,150 rpm	0 - 1,200 rpm	0 - 1,200 rpm
Blows/Min	0 - 4,400 bpm	0 - 4,400 bpm	0 - 4,500 bpm	0 - 4,500 bpm
Impact Energy	2.6 J	2.6 J	2.1 J	2.1 J
Vibration Measurement	8.5 m/s ²	8.5 m/s ²	6.9 m/s ²	6.9 m/s ²
Vibration Control	Yes	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
Chipping	Yes	Yes	Yes	Yes
Concrete Optimum	5/32" - 5/8"	5/32" - 5/8"	5/32 - 1/2"	5/32 - 1/2"
Weight	7.8 lbs	7.8 lbs	6.4 lbs	5.5 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion	1-Hour Charger / (2) 36V Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately
Includes	D25302DH dust extraction system, and 360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod According to EPTA-Procedure 05/2009



18V XRP™ Lithium Ion 7/8" (22 mm) SDS Rotary Hammer Kit



18V XRP™ 7/8" (22 mm) SDS Hammer Kit



18V 7/8" (22 mm) SDS Hammer (Tool Only)

SPECIFICATIONS	DC212KL	DC212KA	DC212B
Volts	18V	18V	18V
Chuck Type	SDS Plus	SDS Plus	SDS Plus
No Load Speed	0 - 1,100 rpm	0 - 1,100 rpm	0 - 1,100 rpm
Blows/Min	0 - 4,100 bpm	0 - 4,100 bpm	0 - 4,100 bpm
Impact Energy	2.0 J	2.0 J	2.0 J
Vibration Measurement	8.0 m/s ²	8.0 m/s ²	8.0 m/s ²
Vibration Control	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
Chipping	No	No	No
Concrete Optimum	5/32 - 1/2"	5/32 - 1/2"	5/32 - 1/2"
Weight	6.7 lbs	7.6 lbs	5.2 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod

According to EPTA-Procedure 05/2009



CUT-OUT TOOL



20V MAX* Cut-Off Tool Kit



20V MAX* Cut-Off Tool (Tool Only)



18V Cut-Off Tool Kit



18V Cut-Off Tool (Tool Only)

SPECIFICATIONS	DCS551D2	DCS551B	DC550KA	DC550B
Volts	20V MAX*	20V MAX*	18V	18V
No Load Speed	26,000 rpm	26,000 rpm	26,000 rpm	26,000 rpm
Collet Diameter	1/4", 1/8"	1/4", 1/8"	1/4", 1/8"	1/4", 1/8"
Adjustable Guide	Yes	Yes	Yes	Yes
Weight	3.1 lbs	2.2 lbs	4.5 lbs	2.1 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	(1) General Purpose Bit, (1) Drywall Cutting Bit, 1/4" & 1/8" Collets	—	(1) General Purpose Bit, (1) Drywall Cutting Bit, 1/4" & 1/8" Collets	(1) General Purpose Bit, (1) Drywall Cutting Bit, 1/4" & 1/8" Collets

CIRCULAR SAWS



36V Lithium Ion 7-1/4" (186 mm) Circular Saw Kit



20V MAX* Lithium Ion 6-1/2" (165 mm) Circular Saw Kit



20V MAX* 6-1/2" (165 mm) Circular Saw (Tool Only)

SPECIFICATIONS	DCS300K	DCS391M1	DCS391B
Volts	36V	20V MAX*	20V MAX*
No Load Speed	4,000 rpm	3,700 rpm	3,700 rpm
Blade Diameter	7-1/4"	6-1/2"	6-1/2"
Bevel Capacity	0° - 50°	0° - 50°	0° - 50°
Depth of Cut at 45°	1-5/8"	1-5/8"	1-5/8"
Depth of Cut at 90°	2-7/16"	2-1/4"	2-1/4"
Weight	9.9 lbs	8.3 lbs	7.0 lbs (tool only)
Charger/Batteries	1-Hour Charger / (1) 36V Lithium Ion	Fast Charger, (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately
Includes	7-1/4" Carbide tipped blade	Carbide tipped circular saw blade	Carbide tipped circular saw blade



18V XRP™ Lithium Ion 6-1/2" (165 mm) Circular Saw Kit



18V XRP™ 6-1/2" (165 mm) Circular Saw Kit



18V 6-1/2" (165 mm) Circular Saw (Tool Only)

SPECIFICATIONS	DCS390L	DC390K	DC390B
Volts	18V	18V	18V
No Load Speed	3,700 rpm	3,700 rpm	3,700 rpm
Blade Diameter	6-1/2"	6-1/2"	6-1/2"
Bevel Capacity	0° - 50°	0° - 50°	0° - 50°
Depth of Cut at 45°	1 - 5/8"	1 - 5/8"	1 - 5/8"
Depth of Cut at 90°	2-1/4"	2-1/4"	2-1/4"
Weight	7.8 lbs	8.7 lbs	6.3 lbs (tool only)
Charger/Batteries	1-Hour Charger / (1) 18V XRP™ Lithium Ion	1-Hour Charger / (1) 18V XRP™	Sold Separately
Includes	6-1/2" 16 tooth carbide tipped blade, blade wrench	6-1/2" 16 tooth carbide tipped blade, blade wrench	6-1/2" 16 tooth carbide tipped blade, blade wrench

METAL CUTTING SAWS



20V MAX* Lithium Ion 5-1/2" (127 mm) Metal Cutting Circular Saw Kit



20V MAX* 5-1/2" (127 mm) Metal Cutting Circular Saw (Tool Only)



18V Lithium Ion 5-1/2" (127 mm) Metal Cutting Circular Saw



18V 5-1/2" (127 mm) Metal Cutting Circular Saw (Tool Only)

SPECIFICATIONS	DCS373M2	DCS373B	DCS372KA	DCS372B
Volts	20V MAX*	20V MAX*	18V	18V
No Load Speed	3,700 rpm	3,700 rpm	3,700 rpm	3,700 rpm
Blade Diameter	5-1/2"	5-1/2"	5-1/2"	5-1/2"
Depth of Cut at 90°	1-11/16"	1-11/16"	1-11/16"	1-11/16"
Weight	8.3 lbs	7.0 lbs (tool only)	9.2 lbs	6.8 lbs (tool only)
Charger/Batteries	Fast Charger, (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	5-1/2" carbide tipped blade	5-1/2" carbide tipped blade	5-1/2" carbide saw blade	5-1/2" carbide saw blade

JIG SAWS



20V MAX* Lithium Ion Jig Saw Kit



20V MAX* Jig Saw (Tool Only)



18V XRP™ Lithium Ion Jig Saw Kit



18V XRP™ Jig Saw Kit w/ Keyless Blade Change



18V Jig Saw w/ Keyless Blade Change (Tool Only)

SPECIFICATIONS	DCS331M1	DCS331B	DCS330L	DC330K	DC330B
Volts	20V MAX*	20V MAX*	18V	18V	18V
Strokes/Min	0 - 3,000 spm	0 - 3,000 spm	0 - 3,000 spm	0 - 3,000 spm	0 - 3,000 spm
Stroke Length	1"	1"	1"	1"	1"
Keyless Blade Clamp	Yes	Yes	Yes	Yes	Yes
Dust Blower	Yes	Yes	Yes	Yes	Yes
Weight	6.8 lbs	5.4 lbs (tool only)	6.6 lbs	7.5 lbs	5.1 lbs (tool only)
Charger/Batteries	Fast Charger, (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	1-Hour Charger / (1) 18V XRP™ Lithium Ion	1-Hour Charger / (1) 18V XRP™	Sold Separately
Includes	Jig saw blade	Jig saw blade	Jig saw blade	Jig saw blade	-

RECIPROCATING SAWS



36V Lithium Ion Reciprocating Saw Kit



20V MAX* Lithium Ion Compact Reciprocating Saw Kit



20V MAX* Lithium Ion Compact Reciprocating Saw Kit



20V MAX* Compact Reciprocating Saw (Tool Only)

SPECIFICATIONS	DC305K	DCS387P1	DCS387D1	DCS387B
Volts	36V	20V MAX*	20V MAX*	20V MAX*
Stroke/Min	0-3,000 spm	0-3,000 spm	0-3,000 spm	0-3,000 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Yes, 4-position	Yes, 4-position	Yes, 4-position	Yes, 4-position
Adjustable Shoe	Yes	No	No	No
Electric Brake	Yes	Yes	Yes	Yes
Weight	8.4 lbs	6.4 lbs	5.9 lbs	5.0 lbs (tool only)
Charger/Batteries	1-Hour Charger / (1) 36V Lithium Ion	Fast Charger / (1) 20V MAX* XR Lithium Ion (5.0 Ah)	Fast Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately



20V MAX* Lithium Ion Reciprocating Saw Kit



20V MAX* Reciprocating Saw (Tool Only)



18V XRP™ Lithium Ion Reciprocating Saw Kit

SPECIFICATIONS	DCS380M1	DCS380B	DCS385L
Volts	20V MAX*	20V MAX*	18V
Stroke/Min	0-3,000 spm	0-3,000 spm	0-3,000 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Yes, 4-position	Yes, 4-position	Yes, 4-position
Adjustable Shoe	Yes	Yes	Yes
Electric Brake	Yes	Yes	Yes
Weight	7.3 lbs	6.0 lbs (tool only)	7.2 lbs
Charger/Batteries	Fast Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	1-Hour Charger / (1) 18V XRP™ Lithium Ion



18V XRP™ Reciprocating Saw Kit



18V Reciprocating Saw (Tool Only)



12V MAX* Lithium Ion Pivot Reciprocating Saw Kit

SPECIFICATIONS	DC385K	DC385B	DCS310S1
Volts	18V	18V	12V MAX*
Keyless Blade Clamp	Yes, 4-position	Yes, 4-position	Yes
Stroke/Min	0-3,000 spm	0-3,000 spm	0-2,700 spm
Stroke Length	1-1/8"	1-1/8"	9/16"
Electric Brake	Yes	Yes	Yes
Weight	8.2 lbs	5.8 lbs (tool only)	3.1 lbs
Charger/Batteries	1-Hour Charger / (1) 18V XRP™	Sold Separately	Fast Charger / (1) 12V MAX* Lithium Ion

CONCRETE VIBRATOR



18V XRP™ Pencil Vibrator Kit



18V Pencil Vibrator (Tool Only)

SPECIFICATIONS	DC530KA	DC530B
Volts	18V	18V
Vibrator Diameter	1-1/8"	1-1/8"
Shaft Length	4'	4'
Vibrations per Minute	14,000 vpm	14,000 vpm
Weight	9.3 lbs	7.0 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 18V XRP™	Sold Separately

NAILERS



SPECIFICATIONS	DCN692M1	DCN692B	DC628K
Volts	20V MAX*	20V MAX*	18V
Operating Mode	Bump & Sequential	Bump & Sequential	Bump & Sequential
Nailing Rate	2 nails/sec	2 nails/sec	4-5 nails/sec
Nail Diameter/Type	.113 - .131 gauge	.113 - .131 gauge	15 ga. DA type gauge
Mag. Angle/Capacity	33°/ 55 nails	33°/55 nails	34°/ 110 nails
Nail Length Capacity	2" - 3-1/2"	2" - 3-1/2"	1-1/4" - 2-1/2"
Magazine Loading	Lock & Load	Lock & Load	Rear - load
Integrated Belt Hook	Yes	Yes	Yes
Tool-Free Jam Cleaning	No	No	Yes
Tool-Free Depth Adj.	Yes	Yes	Yes
Weight	9.1 lbs	7.7 lbs (tool only)	8.9 lbs
Charger/Batteries	Fast Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	1-Hour Charger / (1) 18V XRP™
Includes	No-mar tip	-	No-mar tip, reversible belt hook, DeWALT safety glasses



SPECIFICATIONS	DC618K	DC616K	DC608K	DC608B
Volts	18V	18V	18V	18V
Operating Mode	Bump & Sequential	Bump & Sequential	Bump & Sequential	Bump & Sequential
Nailing Rate	4-5 nails/sec	4-5 nails/sec	4-5 nails/sec	4-5 nails/sec
Nail Diameter/Type	16 gauge	16 gauge	18 gauge	18 gauge
Mag. Angle/Capacity	20°/ 110 nails	Straight/ 110 nails	Straight/ 110 nails	Straight/ 110 nails
Nail Length Capacity	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"	5/8" - 2"	5/8" - 2"
Magazine Loading	Rear - load	Rear - load	Side - load	Side - load
Integrated Belt Hook	Yes	Yes	Yes	Yes
Tool-Free Jam Cleaning	Yes	Yes	Yes	Yes
Tool-Free Depth Adj.	Yes	Yes	Yes	Yes
Weight	8.5 lbs	8.5 lbs	7.4 lbs	7.4 lbs (tool only)
Charger/Batteries	1-Hour Charger / (1) 18V XRP™	1-Hour Charger / (1) 18V XRP™	1-Hour Charger / (1) 18V XRP™	Sold Separately
Includes	No-mar tip, reversible belt hook, DeWALT safety glasses	No-mar tip, reversible belt hook, DeWALT safety glasses	Reversible belt hook, DeWALT safety glasses	Reversible belt hook, DeWALT safety glasses

SHEARS



SPECIFICATIONS	DC495B	DC490KA	DC490B
Volts	18V	18V	18V
Stroke/Min	0-2,300 spm	0-2,300 spm	0-2,300 spm
Min. Cutting Radius	1"	5.5"	5.5"
Capacity in Steel	18 Gauge	18 Gauge	18 Gauge
Weight	3.7 lbs (tool only)	6.1 lbs	3.7 lbs (tool only)
Charger/Batteries	Sold Separately	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	Blade wrench	Blade wrench	Blade wrench

CUT-OFF TOOLS



SPECIFICATIONS	DC415KL	DCG412M2	DCG412B
Volts	36V	20V MAX*	20V MAX*
No Load Speed	6,500 rpm	6,500 rpm	6,500 rpm
Spindle Lock	Yes	Yes	Yes
Spindle Thread	5/8" - 11	5/8"	5/8"
Weight	7.2 lbs	6.5 lbs	5.1 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately
Includes	Type 1 guards, Type 27 guard, Wrench, (2) matched flanges, 2-position side handle and 4-1/2" cutting wheel	Type 1 guards, Wrench and 2-position side handle	Type 1 guards, Wrench, and 2-position side handle

(continued on next page)

CUT-OFF TOOLS

(continued)



18V XRP™ Cut-Off Tool Kit



18V Cut-Off Tool (Tool Only)

SPECIFICATIONS	DC411KA	DC411B
Volts	18V	18V
No Load Speed	6,500 rpm	6,500 rpm
Spindle Lock	Yes	Yes
Spindle Thread	5/8" - 11	5/8" - 11
Weight	7.0 lbs	4.6 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	Type 1 guards, Wrench, (2) matched flanges, 2-position side handle and 4-1/2" cutting wheel	Type 1 guards, wrench, (2) matched flanges and 2-position side handle



BAND SAWS



20V MAX* Lithium Ion Band Saw



18V XRP™ Lithium Ion Band Saw



18V XRP™ Band Saw



18V Band Saw (Tool Only)

SPECIFICATIONS	DCS371M1	DCS370L	DCS370K	DCS370B
Volts	20V MAX*	18V	18V	18V
Ft/Min	570	570 fpm	570 fpm	570 fpm
Blade Length	32-7/8	32-7/8"	32-7/8"	32-7/8"
Max Capacity	2-1/2"	2-1/2"	2-1/2"	2-1/2"
Tool Length	15"	15"	15"	15"
Weight	9.4	9.2 lbs	10 lbs	7.7 lbs (tool only)
Charger/Batteries	Fast Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	1-Hour Charger / (1) 18V XRP™ Lithium Ion	1-Hour Charger / (1) 18V XRP™	Sold Separately
Includes	14/18 blade, blade tracking wrench	14/18 blade, blade tracking wrench	14/18 blade, blade tracking wrench	14/18 blade, blade tracking wrench

BI-METAL CORDLESS BANDSAW BLADES

CAT #	TPI	THICKNESS	LENGTH	HEIGHT	PACK
DW3982C	14	.020"	32-7/8"	1/2"	3
DW3983C	18	.020"	32-7/8"	1/2"	3
DW3984C	24	.020"	32-7/8"	1/2"	3
DW3986C	14/18	.020"	32-7/8"	1/2"	3



18V Adhesive Dispenser - 300 ml (Tool Only)



18V Adhesive Dispenser - 29 oz (Tool Only)



18V Adhesive Dispenser - 10 oz



18V Adhesive Dispenser - 10 oz (Tool Only)

ADHESIVE DISPENSERS

SPECIFICATIONS	DC547B	DC546B	DC545K	DC545B
Volts	18V	18V	18V	18V
Lbs of Force	650	650	650	650
Auto Reverse	Yes	Yes	Yes	Yes
"Set & Forget" Speed Control	Yes	Yes	Yes	Yes
Capacity	300 ml & 600 ml sausage packs	29 oz, & quart size cartridges	10 oz, 1/10 gal, & 300 ml - 310 ml cartridges	10 oz, 1/10 gal, & 300 ml - 310 ml cartridges
Max. Speed	25 in/min	25 in/min	25 in/min	25 in/min
Weight	4.7 lbs (tool only)	5.5 lbs (tool only)	6.8 lbs	4.6 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	1-Hour Charger / (1) 18V	Sold Separately

WORKLIGHTS

20V MAX
18 VOLT



18V/20V MAX* LED Worklight (Tool Only)

20V MAX
18 VOLT



18V/20V MAX* Cordless/Corded LED Worklight (Tool Only)

20V MAX



20V MAX* LED Worklight (Tool Only)

20V MAX



20V MAX* LED Worklight (Tool Only)

18 VOLT



18V Flexible Floodlight (Tool Only)

SPECIFICATIONS	DCL060	DCL061	DCL050	DCL040	DW919
Volts	18V or 20V MAX*	18V or 20V MAX* or AC/DC Power	20V MAX*	20V MAX*	18V
Bulb	LED	LED	LED	LED	Xenon bulb
Brightness	1500 lumens	1500 lumens	500 & 250 lumens	110 lumens	—
Run-Time	Up to 2.5 hrs w/4.0 Ah Pack	Up to 2.5 hrs w/4.0 Ah Pack	Up to 3 - 17 hrs.	Up to 11 hrs	Up to 3 hrs
Weight	3.27 lbs (tool only)	3.27 lbs (tool only)	2 lbs (tool only)	1.0 lbs (tool only)	0.5 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately	Sold Separately	Sold Separately

18 VOLT



18V Pivoting Head Flashlight (Tool Only)

18 VOLT



18V Fluorescent Area Light (Tool Only)



Cordless/Corded Worklight (Tool Only)



14.4V Pivoting Head Flashlight (Tool Only)

SPECIFICATIONS	DW908	DC527	DC020	DW906
Volts / Power Source	18V	18V	12-18V NiCd/NiMH/Li-Ion Batteries or AC/DC Power	14.4V
Bulb	Xenon bulb	13 Watt fluorescent	38W fluorescent	Xenon bulb
Brightness	—	—	2700 lumens	—
Run-Time	Up to 3 hrs	Up to 3.5 hrs	Up to 1 hr	Up to 3 hrs
Weight	0.5 lbs (tool only)	1.2 lbs (tool only)	6.0 lbs (tool only)	0.5 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately	Sold Separately

12V MAX



12V MAX* Lithium Ion LED Worklight (Tool Only)



LED Replacement Bulb



8V MAX* Worklight (Tool Only)

SPECIFICATIONS	DCL510	DCL0900	DCL023
Volts / Power Source	12V MAX*	9.6V - 36V	8V MAX*
Bulb	LED	LED	LED
Brightness	130 lumens	110 lumens	80 lumens
Run-Time	Up to 4 hrs	Up to 4 hrs	Up to 5 hrs.
Weight	0.5 lbs (tool only)	0.2 lbs (tool)	0.6 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately

INSTRUMENTS

12V MAX



12V MAX* Lithium Ion Infrared Thermometer Kit

12V MAX



12V MAX* Lithium Ion Imaging Thermometer Kit

SPECIFICATIONS	DCT414S1	DCT416S1
Volts	12V MAX*	12V MAX*
Temperature Range	-20° F to 932° F (-29° C to 500° C)	14° F to 480° F (-10° C to 250° C)
Field of View; Distance, Spot	(D:S) 12:1	(IFOV) 1" @ 39.3" (25 mm @ 1m)
Accuracy	+/-1.5% or +/- 1.5° C, whichever is greater, assumes ambient	Below 200° F, +/-3.6° F, Above 200° F, +/-2%, assumes ambient operating temperature
Charger/Batteries	Fast Charger / (1) 12V MAX* Lithium Ion	Fast Charger / (1) 12V MAX* Lithium Ion
Includes	—	Micro SD card, Report writing software

12V MAX



12V MAX* Lithium Ion (17 mm) Inspection Camera with Wireless Screen Kit

12V MAX



12V MAX* Lithium Ion (9 mm) Inspection Camera with Wireless Screen Kit

12V MAX



12V MAX* Lithium Ion (5.8 mm) Inspection Camera with Wireless Screen Kit

SPECIFICATIONS	DCT410S1	DCT411S1	DCT412S1
Volts	12V MAX*	12V MAX*	12V MAX*
Camera Head Diameter	17 mm	9 mm	5.8 mm
Cable Length	3' waterproof	3' waterproof	3' waterproof
Screen Size	3.5"	3.5"	3.5"
Resolution	320x480 dpi	320x480 dpi	320x480 dpi
Zoom	3X	3X	3X
Charger/Batteries	Fast Charger / (1) 12V MAX* Lithium Ion	Fast Charger / (1) 12V MAX* Lithium Ion	Fast Charger / (1) 12V MAX* Lithium Ion
Includes	17 mm - 3' camera cable, hook, & magnet	9 mm - 3' camera cable, hook, magnet, & mirror	5.8 mm - 3' camera cable



HEATED GEAR

20V MAX
12V MAX
LITHIUM-ION BATTERY



Soft Shell Work Jacket

20V MAX
12V MAX
LITHIUM-ION BATTERY



Hooded Work Jacket

20V MAX
12V MAX
LITHIUM-ION BATTERY



TRUE TIMBER® HTC Camo Jacket

20V MAX
12V MAX
LITHIUM-ION BATTERY



TRUE TIMBER® Blaze Camo

SPECIFICATIONS

	DCHJ060C1/B*	DCHJ061C1/B*	DCHJ062C1/B*	DCHJ063C1/B*
Color	Black	Black	Camo	Camo
Pockets	5	4	7	7
Heat Zones	4	3	4	4
Water Resistant	Yes	Yes	Yes	Yes
Wind Resistant	Yes	Yes	Yes	Yes
Charger/Batteries	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)
Includes	DCB091 USB Power Source	DCB091 USB Power Source	DCB091 USB Power Source	DCB091 USB Power Source

20V MAX
12V MAX
LITHIUM-ION BATTERY



Hooded Jacket

20V MAX
12V MAX
LITHIUM-ION BATTERY



Jacket with Removable Sleeves

20V MAX
12V MAX
LITHIUM-ION BATTERY



Women's Jacket with Removable Hood

20V MAX
12V MAX
LITHIUM-ION BATTERY



Hoodie

SPECIFICATIONS

	DCHJ064C1/B*	DCHJ065C1/B*	DCHJ066C1	DCHJ067B*
Color	Khaki	Black	Black	Black
Pockets	4	4	4	3
Heat Zones	3	4	4	3
Water Resistant	Yes	Yes	Yes	No
Wind Resistant	Yes	Yes	Yes	Yes
Charger/Batteries	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately
Includes	DCB091 USB Power Source	Removable Sleeves and DCB091 USB Power Source	DCB091 USB Power Source and Removable Hood	DCB091 USB Power Source

20V MAX
12V MAX
LITHIUM-ION BATTERY



Hoodie

20V MAX
12V MAX
LITHIUM-ION BATTERY



High Visibility Class III 3-in-1 Hooded Jacket

20V MAX
12V MAX
LITHIUM-ION BATTERY



High Visibility Class III Hoodie

SPECIFICATIONS

	DCHJ068B*	DCHJ070C1/B*	DCHJ071B*
Color	Gray	High Visibility	High Visibility
Pockets	3	7	4
Heat Zones	3	3	3
Water Resistant	No	Yes	Yes
Wind Resistant	Yes	Yes	Yes
Charger/Batteries	Sold Separately	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately
Includes	DCB091 USB Power Source	DCB091 USB Power Source	DCB091 USB Power Source



* (B) Units only include DCB091

The camo patterns are used under license from True Timber Outdoors Holding Company, LLC. The True Timber® registered trademark and the HTC and Blaze Camo designs are owned by True Timber Outdoors Holding Company, LLC.

WHY DeWALT COMBO KITS?

1. RIGHT MIX OF TOOLS FOR TRADES AND APPLICATIONS:

DeWALT offers a full range of combination kits to accommodate Professional Users and common applications being performed. Depending on your needs – drilling wood or concrete, fastening, cutting wood or metal, lighting, demolition – DeWALT has a cordless solution.

2. VALUE PROPOSITION VERSUS INDIVIDUAL TOOLS:

- Get the cordless tools you need in one kit for easy carry and storage
- All are powered by the same battery pack and charger within voltage family
- Saves money versus buying each tool individually



36V COMBO KITS



SPECIFICATIONS	DCX6401
Volts	36V
Hammerdrill/Drill/Driver	DC901
Circular Saw	DC300
Reciprocating Saw	DC305
Flexible Floodlight	DC509
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion
Includes	360° side handle, & 7-1/4" carbide tipped blade

20V MAX* COMBO KITS



SPECIFICATIONS	DCK592L2	DCK590L2	DCK492L2	DCK491L2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	DCD985	DCD985	DCD985	DCD985
Circular Saw	DCS391	DCS393 (6-1/2")	DCS380	DCS393 (6-1/2")
Reciprocating Saw	DCS380	DCS381	DCF885	DCS381
Impact Driver	DCF885	DCF885	—	—
LED Worklight	DCL040	DCL040	DCL040	DCL040
Charger/Batteries	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)
Includes	360° side handle, carbide tipped circular saw blade, & belt hook	360° side handle, carbide tipped circular saw blade, & belt hook	360° side handle & belt hook	360° side handle & carbide tipped circular saw blade

20V MAX* COMBO KITS (continued)



20V MAX* Lithium Ion
4-Tool Combo Kit



20V MAX* Lithium Ion
4-Tool Combo Kit



20V MAX* Lithium Ion
2-Tool Combo Kit



20V MAX* Lithium Ion
2-Tool Combo Kit

SPECIFICATIONS	DCK490L2	DCK298L2	DCK292L2	DCK290L2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	DCD985	—	DCD985	DCD985
Reciprocating Saw	DCS381	DCS380	DCS380	—
Impact Driver	DCF885	DCF885	—	DCF885
Screwdriver	—	—	—	—
LED Worklight	DCL040	—	—	—
Charger/Batteries	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)
Includes	360° side handle & belt hook	360° side handle	360° side handle	360° side handle and belt hook



20V MAX* XR Lithium Ion
Brushless 2-Tool Combo Kit



20V MAX* XR Lithium Ion
Brushless 2-Tool Combo Kit

SPECIFICATIONS	DCK286D2	DCK281D2
Volts	20V MAX*	20V MAX*
Hammerdrill	—	—
Drill/Driver	DCD795	DCD790
Impact Driver	DCF886	DCF886
Charger/Batteries	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)
Includes	(2) belt hooks and bit holder	(2) belt hooks and bit holder



20V MAX* Lithium Ion
2-Tool Combo Kit



20V MAX* Lithium Ion
2-Tool Combo Kit

SPECIFICATIONS	DCK285C2	DCK280C2
Volts	20V MAX*	20V MAX*
Hammerdrill	DCD785	—
Drill/Driver	—	DCD780
Impact Driver	DCF885	DCF885
Charger/Batteries	Fast Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)
Includes	(2) belt hooks and bit holder	(2) belt hooks and bit holder

18V COMBO KITS



18V XRP™ 9-Tool Combo Kit

SPECIFICATIONS	DCK955X
Volts	18V
Hammerdrill/Drill/Driver	DCD950
Circular Saw	DC390 (6-1/2")
Reciprocating Saw	DC385
Cut-Off Tool	DC411
Cut-Out Tool	DC550
Jig Saw	DC330
Impact Driver	DC825
Impact Wrench	DW059
Flexible Floodlight	DW919
Charger/Batteries	1-Hour Charger / (2) 18V XRP™
Includes	360° side handle, carbide tipped circular saw blade, type 1 guard, wrench, (2) matched flanges, 2-position side handle

18V COMBO KITS



18V XRP™ Lithium Ion 6-Tool Combo Kit



18V XRP™ 6-Tool Combo Kit



18V XRP™ 5-Tool Combo Kit



18V XRP™ Lithium Ion 4-Tool Combo Kit

SPECIFICATIONS	DCK675L	DCK655X	DCK555X	DCK475L
Volts	18V	18V	18V	18V
Hammerdrill/Drill/Driver	DCD970	DCD950	DCD950	DCD970
Circular Saw	—	DC390 (6-1/2")	DC390 (6-1/2")	—
Reciprocating Saw	DC385	DC385	DC385	DC385
Cut-Off Tool	DC411	DC411	—	—
Cut-Out Tool	—	—	—	—
Jig Saw	—	—	—	—
Impact Driver	DC827	DC825	DC825	DC827
Impact Wrench	DW059	—	—	—
Flexible Floodlight	DW919	DW919	DW919	DW919
Charger/Batteries	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™	1-Hour Charger / (2) 18V XRP™	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion
Includes	360° side handle, type 1 guard, wrench, (2) matched flanges, 2-position side handle	360° side handle, carbide tipped circular saw blade, type 1 guard, wrench, (2) matched flanges, (1) type 1 wheel & 2-position side handle	360° side handle & carbide tipped circular saw blade	360° side handle