



Celebrating of Innovation



BRUSHLES

XPH07T 18V LXT° BRUSHLESS 1/2" HAMMER DRIVER-DRILL 1,090 In.Lbs OF AWESOME

See page 12







HR4013C 1-9/16" AVT® ROTARY HAMMER
Advanced Anti-Vibration Technology for up to 3X Less Vibration

See page 31

makitatools.com

Benchtop > TABLE SAWS / PLANER

Miter Saw Blades





cutting



Japanese ultra-thin kerf carbide-tipped design ATAF (Alternate Top and Alternating Face) tooth design for ultra precision





Fully hardened and expertly hand-tensioned steel saw plates for true cuts



Ultra-coated blades feature resin bond filled laser cut slots for quiet and smooth cutting

Micro-Polished

ULTRA-COATED

Ultra-coated

blades provide

reduced pitch

build-up





ATAF (Alternate Top and Alternating Face) tooth design for ultra precision cutting

Micro-grain carbide teeth are honed with up to 600 grit for a mirror finish





Ultra-Thin Kerf


Japanese ultra-thin kerf carbide-tipped design provide smoother cuts with



Fully hardened and expertly handtensioned steel saw plates for true cuts



ma ta

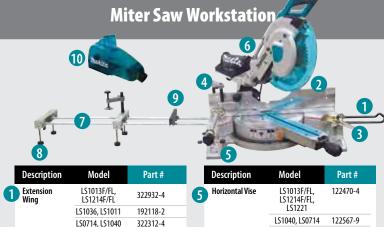

| | Description | Model | Part # |
|---|--------------------|------------------------------|------------|
| 1 | Extension Wing | LS1013F/FL, LS1214F/FL | 322932-4 |
| | | LS1036, LS1011 | 192118-2 |
| | | LS0714, LS1040 | 322312-4 |
| | | LS1221 | 323726-0 |
| | | LS1016/L/LX5, LS1216L/LX4 | 325673-1* |
| | | LS0815F | JM23000127 |
| 2 | Right Sub-Fence | LS1013F/FL, LS1214F/FL | 153898-5 |
| | Crown Molding | L C1013F /FI | 102620.0 |

| Sub-Fence | LS1214F/FL | 153898-5 |
|--------------------------------|-------------------------|----------|
| 3 Crown Molding Stopper Set | LS1013F/FL | 192628-9 |
| | LS1040 | 192622-1 |
| | LS1016/L/LX5, LS1221 | 192669-5 |
| | LS1216L/LX4 | 195253-5 |
| 4 Vertical Vise | LS1040 | 122536-0 |

LS1013F/FL 122538-6 LS1221 192672-6 LS1214F/FL 122540-9 LS0714 122571-8 LS1016/L/LX5 122854-6 LS1216L/LX4

| | Description | Model | Part # |
|---|-----------------|--------------------------------------|----------|
| 6 | Horizontal Vise | LS1013F/FL, LS1214F/FL, LS1221 | 122470-4 |
| | | LS1040, LS0714 | 122567-9 |
| | | LS1016/L/LX5, LS1216L/LX4 | 122930-6 |
| 6 | Directional | LS1040, | A16260 0 |

| | EIDOW | LS1013F/FL, LS1221, LS1214F/FL | 410308-8 |
|---|-----------------------------|-----------------------------------|----------|
| 0 | Extension Rod 1/2" x 83" | LS1040, LS1221, LS1214F/FL | 256812-1 |

| E | Extension Rod Holder | LS1040 | 122446-1 |
|---|-------------------------|--------------------|----------|
| O | Holder | LS1214F/FL, LS1221 | 192671-8 |
| | | | |

| 9 | Repetitive Cut Set Plate | LS1040 LS0714, LS1221, | 122472-0 |
|---|-----------------------------|-------------------------------|----------|
| 1 | Dust Box | LS1016/L/LX5, LS1216L/LX4, | 194175-6 |

LS0714, LXSL01

*Use with thumbscrew Part # 251889-1



2705

10" TABLE SAW **Precision Machined Table Top** for Accurate Cuts

- Powerful 15 AMP motor delivers 4,800 RPM for improved performance
- Large cutting capacity (3-9/16" at 90° and 2-1/2" at 45°) can rip 4x material in one pass; can use up to a 13/16"
- Right extension table allows for greater cutting capacity with the capability to rip 4x8 sheets of plywood
- Extended capacity with up to 25" ripping

Model 2705 Includes: 10" 32T Carbide-Tipped Table Saw Blade (A-94948), Rip Fence (122740-1), Miter Gauge (122838-4), Push Stick (416772-1), Spanner Wrench (781038-1), Wrench (782024-5)

| Blade Diameter | 10" |
|--------------------------|----------------------------|
| Arbor | 5/8" |
| Max. Cutting Capacities: | 90° (3-5/8"), 45° (2-1/2") |
| No Load Speed | 4,800 RPM |
| AMPS | 15 |
| Table Size (WxL) | 24-5/8" x 22-1/4" |
| Net Weight | 65.5 lbs. |
| Shipping Weight | 88.2 lbs. |



10" CONTRACTOR TABLE SAW WITH STAND

Includes Stand - Precision Machined Table Top for Accurate Cuts

- Powerful 15.0 AMP motor delivers 4,800 RPM for improved performance
- Large cutting capacity (3-9/16" at 90° and 2-1/2" at 45°); rips 4x material in one pass
- Large 25" ripping capacity for cutting plywood/ sheet material
- · Easy to read scale with magnifying glass for increased accuracy
- Spring loaded mechanism for quick and easy set up

Model 2705X1 Includes: 10" 32T Carbide-Tipped Table Saw Blade (A-94948), Rip Fence (122740-1), Miter Gauge (122838-4), Push Stick (416772-1), Spanner Wrench (781038-1), Wrench (782024-5), Hex Wrench (783203-8), Portable Table Saw Stand (194093-8)

| lade Diameter | 10" |
|--------------------------|----------------------------|
| rbor | 5/8" |
| lax. Cutting Capacities: | 90° (3-5/8"), 45° (2-1/2") |
| o Load Speed | 4,800 RPM |
| MPS | 15 |
| able Size (WxL) | 24-5/8" x 22-1/4" |
| et Weight (w/stand) | 114.7 lbs. |
| hipping Weight (w/stand) | 156.2 lbs. |
| | |





Table Saw Accessories

| Description | Model | Part# |
|-----------------------|-------------------|----------|
| Porta-Table | 2703 | 122731-A |
| Table Saw Stand | 2703 | 193920-6 |
| Blade Guard System | 2705/X1 | 122820-3 |
| Outfeed Table Se | et 2704,2705/X1 | 194087-3 |
| Dado Flange Set | 2703,2704 | 192693-8 |
| Dado Head Inser | t 2703 | 317061-6 |
| | 2704,2705/X1 | 317934-3 |
| Push Stick | 2703,2704,2705/X1 | 416772-1 |
| Push Block | 2703,2704,2705/X1 | 155508-0 |
| Miter Gauge | 2703 | 122555-6 |
| | 2704,2705/X1 | 122838-4 |



2012NB

12" PORTABLE PLANER Automated Head Clamp

Eliminates Snipe · Compact with less weight for easy transporting to the

- jobsite
- Engineered for faster, easier blade changes
- · Low noise (83dB) for operator comfort
- 4-post design and diagonal cross supports for stability
- · Large and easy-to-operate on/off paddle switch
- Fully adjustable depth stop for repeat cuts

Model 2012NB Includes: 12 in. Double Edged Planer Blades for 2012NB (793346-8), Magnetic Holder (762014-4), Blade Wrench (783208-8), Key (415715-0)

Cutting Capacities:

| Width (12"). | Depth (1/8"), Thickness (6-3/32" |
|--------------------|----------------------------------|
| No. of Knives | |
| Table Size (WxL) | 12" x 30-3/8 |
| No Load Speed | 8,500 RPN |
| AMPS . | 15 |
| Dimensions (LxWxH) | 30-3/8" x 19-1/64" x 15-25/32 |
| Net Weight | 61.9 lbs |
| Shipping Weight | 67.6 lbs |









