


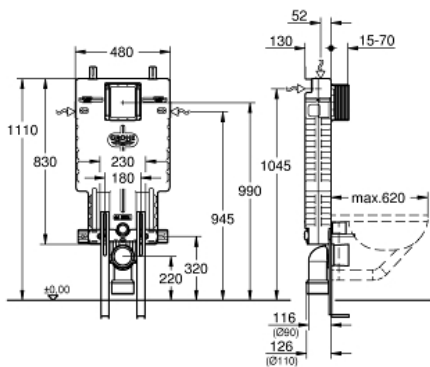

Product Description:

UNISET

Standard Specification:

- Flushing cistern (GD 2)
- Sound-insulating EPS module for masonry
- 32 5/8" x 18 1/2" x 5 1/8"
- Bar adaptors for modular mounting
- Wall bar with mounting accessories for single installation
- WC mounting screws (2x)
- Distance of mounting screws (7" - 9")
- Mounting kit for ceramic
- outlet bend Ø 90 mm
- Depth adjustable
- Reducer Ø 90/110 mm
- Inlet and outlet connecting set
- Adjustment from factory (1.6 gal and .8 gal)
- Pneumatic discharge valve offering: 3 modes of operation: dual flush or start/stop or single flush
- Water supply from left, right, back, or top
- Low noise (group I acc. to/German Noise Specification)
- Insulated against condensation
- 1/2" water supply connection, includes integrated angle valve with push-fit flexible hose union
- No tools required for the installation of the inspection shaft incl. protection during construction phase
- For mounting of small flush plates please order revision shaft 40 911 000 (sold separately)

Color:

□ 38642001