

## Aquia® IV Close Coupled Toilet, 1.0 & 0.8 GPF with WASHLET®+ S550e

### FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX™ TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.0 & 0.8 GPF (3.8 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Completely skirted design for a sleek and understated look that's easier to clean
- Elongated front bowl, WASHLET and tank set
- Universal height
- Chrome push-button
- 12" Unifit Rough-in
- Auto open/close lid with night light
- On-demand wand cleaning with ewater+®

### MODELS

- MW4463056CUMFG#01  
With CEFIONTECT ceramic glaze & WASHLET S550e with contemporary design

### COMPONENTS

- CT446CUFGT40  
Elongated bowl with CEFIONTECT
- ST446UM  
Tank and cover only
- SW3056T40  
WASHLET S550e with contemporary design
- 9AU321-A  
WASHLET adapter

#### Optional Components

- TSU08W.10  
10" Unifit Rough-In
- TSU08W.14  
14" Unifit Rough-In
- THU735#01-A  
Push Button Assembly - Cotton
- THU735#PN-A  
Push Button Assembly - Polished Nickel
- THU735#BN-A  
Push Button Assembly - Brushed Nickel

### COLORS/FINISHES

- #01 Cotton



**DYNAMAX  
TORNADO FLUSH**



**EWATER+**



**CEFIONTECT**



**Universal Height**

### PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.0 GPF/0.8 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, universal height, complete skirted bowl and chrome push-button. Toilet shall be TOTO Model MW4463056CUMFG#01.

See SW3056T40 Specification Sheet for details on included WASHLET.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



# MW4463056CUMFG

## Aquia® IV Close Coupled Toilet, 1.0 & 0.8 GPF with WASHLET®+ S550e

### SPECIFICATIONS


<b>Water Use</b>	1.0 & 0.8 GPF (3.8 & 3.0 LPF)
<b>Flush System</b>	DYNAMAX™ TORNADO FLUSH™
<b>Min. Water Pressure</b>	8 psi (Flowing)
<b>Water Surface</b>	5-5/8" x 4-1/8"
<b>Trap Diameter</b>	2-1/2"
<b>Rough-in</b>	12" (10" & 14" Optional)
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	CT446CUFGT40 85 lbs ST446UM 29 lbs
<b>Shipping Dimensions</b>	CT446CUFGT40 30-3/4" L x 17-3/8" W x 20-1/2" H ST446UM 17-1/4" L x 7-7/8" W x 17-1/2" H

See SW3056T40 Specification Sheet for details on included WASHLET.

### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

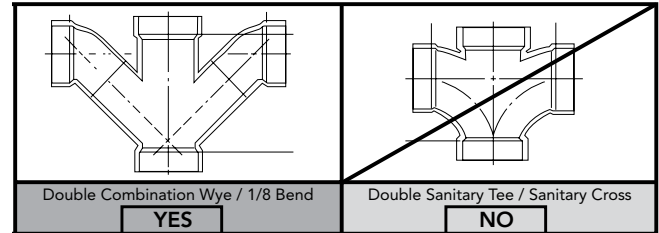

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

### DIMENSIONS

