Flara™ Accessories Technical Specification

Double Robe Hook

YB0303


Stock Numbers:

- YB0303BN Double Robe Hook Brushed Nickel Finish
- □ YB0303CH Double Robe Hook Chrome Finish
- YB0303NL Double Robe Hook
 Polished Nickel
- YB0303BG Double Robe Hook
 Brushed Gold

Materials:

Robe Hooks are constructed of zinc.

Dimensions:

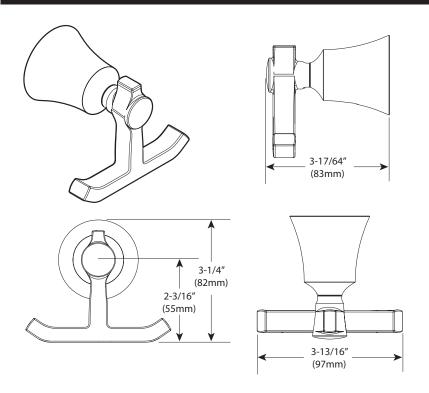

Installation Instructions:

- 1. Position the assembled unit on the wall where desired.
- 2. Using a level, align the provided template and tape it to the wall.
- Mark the desired hole locations through the template (such as tracing or poking holes).
- 4. Remove the mounting bracket from the body by loosening the setscrew.
- 5. Center mounting bracket within the base outline with "UP" facing you.
- 6. Attach the mounting bracket to the wall, using the wall anchors provided.
- 7. Mount the base on the corresponding mounting bracket. Check and make sure that the base screw hole is facing down. Assemble a set screw to the base. Use the allen wrench included in a hardware kit to tighten the set screw and secure the assembly to the mounting bracket.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:	_ Double Robe Hook
By Moen Incorporated	

MOEN®

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.MOEN.COM