

CST748CEMFG


Drake® Transitional Close Coupled Toilet 1.28 and 0.8 GPF

INSTALLATION NOTES

SPECIFICATIONS


Water Use	1.28 & 0.8 GPF (4.8 & 3.0 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Static)
Water Surface	5-5/8" x 4-1/8"
Trap Diameter	2-1/2"
Rough-in	12"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT746CUF(G) 66 lbs.
	ST748EMA 33.1 lbs.
Shipping Dimensions	CT746CUF(G) 28-1/4" L x 17-1/4" W1 x 10-3/4" W2 x 17-1/4" H
	ST748EMA 19-7/8" L x 9-3/8" W x 15-5/8" H

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

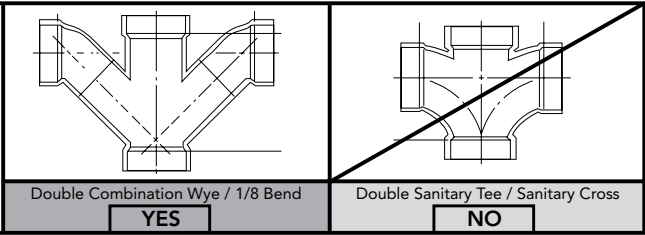

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

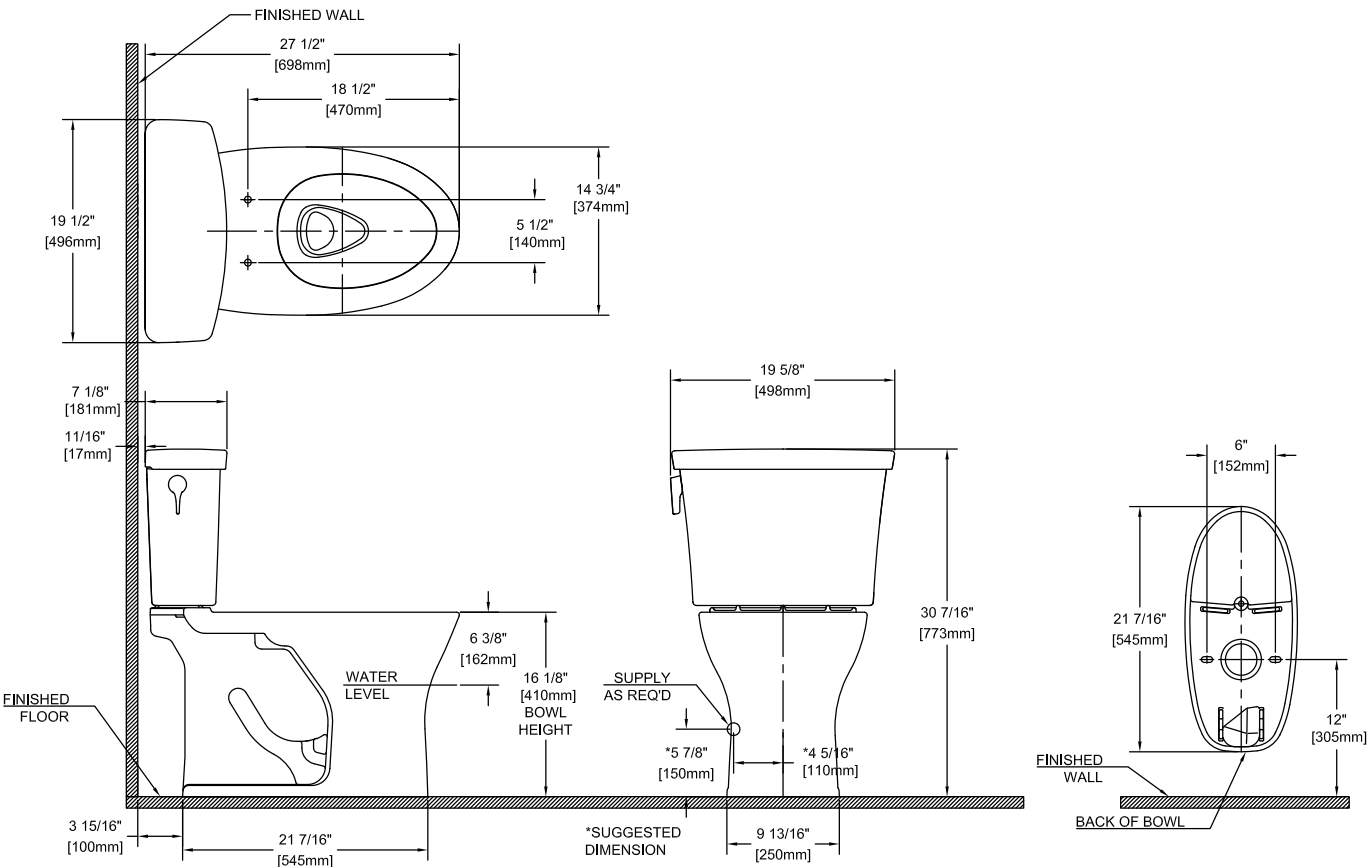

Fixture Dimensions shown are nominal. These dimensions and specifications are subject to change without notice.