

**THETFORD**

 **Bathroom  
anywhere**<sup>TM</sup>  
*Wastewater Transfer System*

**new**  
& IMPROVED

*Easily and cost-effectively install a toilet,  
sink & shower/bathtub **virtually anywhere!***

**Why it's better:**

- **Powerful** (0.8 HP/600 W = up to 9 m/28 ft. vertical lift)
- **Quiet** (industry-leading)
- **Design** (several china models and colors)
- **Easy Service** (split design)
- **Warranty** (best in industry)
- **Value** (soft-closing seat and extra clamp included)



Certified by  
IAPMO R&T




*Scan to view informative video:*

# Bathroom anywhere™

Wastewater Transfer System

Install an entire bathroom without busting up your floor!




## Ideal for basements... and much more!

- Loft Conversions
- Garage Conversions
- Wet Bars
- Areas with Slab Floors
- Special Needs Facilities
- And More!


Bathroom Anywhere's system - macerator and rear-discharge toilet - enables homeowners to install a bathroom with toilet, sink and shower/bathtub in places where traditional gravity plumbing is unavailable. It saves the installer time, money and mess by avoiding the break-up of concrete floors to install underground plumbing required by traditional bathroom fixtures.

Bathroom Anywhere is highly engineered with built-in check valves, and handles 200°F (93°C) water - compared to 105°F (40°C) for any competition. The system has been tested to 2 million cycles, far exceeding ANSI specifications of 50,000 cycles. This extensive testing allows us to back Bathroom Anywhere with an industry-leading warranty.

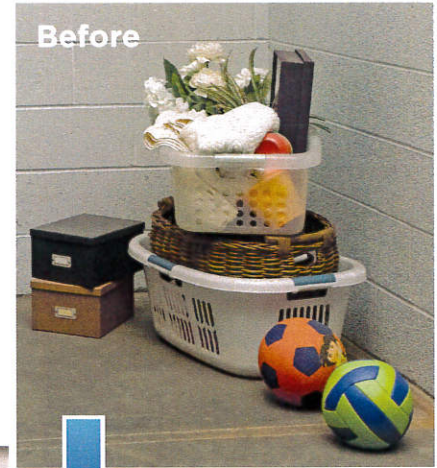


↑ 28 ft  
← 150 ft

Pumps up to 28 ft. vertical rise and more than 150 ft horizontal run.

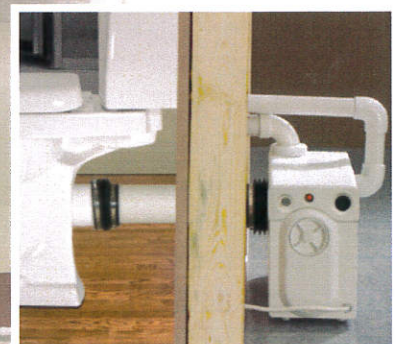

# Superior engineering & split design for easy access and maintenance.

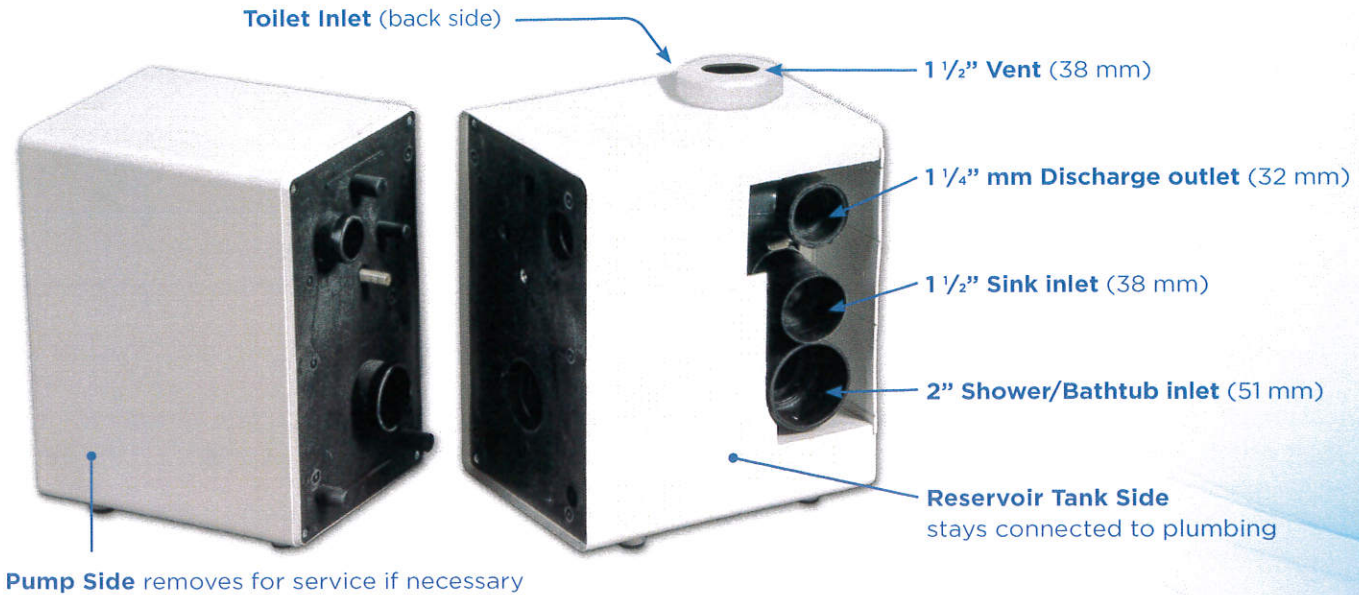

## Macerator System

- Powerful 0.8 HP/600 W centrifugal pump
- Clog-resistant design
- Manual override button to aid in clearing obstructions

## Unique Split Design

- Easy access to unclog unflushable objects
- Allows easy, no-mess servicing if needed
- No need to disconnect plumbing lines or toilet for maintenance
- Bladder system contains odors and ensures against leaks

## Toilet Tank & Bowl

- **"Slow-Close" Seat and Cover included** - a \$45 value!
- Rear-discharge toilet with 1.28 gallon (4.8 L) flush
- Contemporary styling: round and elongated bowl
- 18 1/2" (470 mm) comfort height

## Industry's Quietest System

- As quiet as a conventional toilet

## Safety

- Built-in backflow prevention
- Overheat and circuit protection



# 3 Easy Installation Options:



**1** System and Plumbing Hidden



**2** System Exposed, Plumbing Hidden



**3** System and Plumbing Exposed

### Macerator Pump Includes:

- 120V macerator pump
- Integral anti-siphon backflow prevention
- Installation hardware w/clamps
- Installation instructions

### Macerator Pump Specifications:

- Max. 55 gallons/min (208 liters/min)
- 0.8 Horsepower/600 W
- Amp Draw: 8A @ 120V

### Macerator Box Dimensions:

- 18.5" (W) x 11.5" (H) x 7" (D)  
470 mm (W) x 292 mm (H) x 178 mm (D)
- Color: White

### Required (not included):

- GFCI electrical outlet
- Plumbing fittings and pipes
- No need to purchase expensive extension pipe to conceal the plumbing – a \$50 savings!

### Weights:

- Macerator Pump: 26 lbs. (11.8 kg)
- Elongated Toilet Bowl: 70 lbs. (31.8 kg)
- Round Toilet Bowl: 62 lbs. (28.2 kg)
- Tank: 32 lbs. (14.5 kg)

**Macerator Pump, Toilet Bowl and Tank sold separately.**

**Toilet tank and bowl are available in White or Bisque and are sold separately.**

### Rear Discharge Toilet

- Slow-close Seat & Cover
- Chrome Finish Handle
- Contemporary Styling
- Complies with ADA Height Guidelines and ANSI Standards (A112.19.2M)

*Follow all applicable local building codes and standards. See Owner's Manual for details.*



Based in Ann Arbor, Michigan, Theftford has been the trusted world leader in sanitation products - including PortaPotti® - since 1963.

For more information:

**1.800.543.1219 • 734.769.6000**

**www.bathroomanywhere.com**



Complies With  
ASME A112.3.4  
CSA B45.9



Complies With  
UL 778  
CSA C22.2  
No.108  
E113014

**ISO 9001 Certified  
Quality System**