

Exposed Teck® Flush Valve

TECK®
COMMERCIAL

DELTA

Specification: (example)

(FOR 1-1/2" TOP INLET CLOSET FIXTURE)

- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated finish
- **External water conserving flush volume adjustment,**
(except -48 and -6 models) factory set at 60 PSI to 6 litre
(1.6 US gal.)
- Vandal resistant cover screw
- Metal "non hold open" handle
- **1" FIP/copper sweat inlet adaptor** angle check stop with
protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16")
inlet/valve outlet centers
- Vacuum breaker
- Cover tube and SIS wall flange, spud flange and concealed
spud nut

WITH 610mm (24") "A" LENGTH AND 38mm (1-1/2" offset)

□ 81T261

As above

□ 81T261-6

Same as 81T261,
but **Not Field Adjustable**

□ 81T261-48

Same as 81T261, but factory set at 60 PSI to 4.8 litre
(1.27 US gal.), **Not Field Adjustable**



Approvals:

- CSA certified
- Complies to ASSE 1037
- ADA compliant and meets
Handicapped Accessibility 
Standard ASME A117.1 of less
than 5 lbs. operating force.
- IAPMO Listed

(Contact Delta Representative for State
and/or Local Approvals.)

Engineer/Architect Approval

Model Specified:


Approval:

Date:

Note: Measurements may vary $\pm$ 6mm (0.25")



81T261

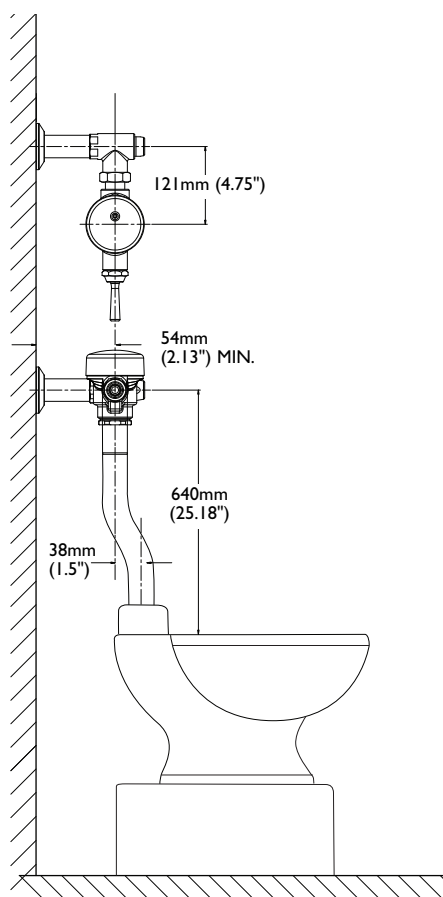

Note: For high and low pressure applications, please see page
FEA-81T High Water Pressure note for more details.
Verify flow requirements with bowl manufacturer.