MOEN[®]

DESCRIPTION

- Power Boost[™] Spray Technology provides boosted water performance with the push of a button
- Reflex[™] pulldown system offers smooth operation, easy movement and secure docking
- · Metal construction with various finishes identified by suffix
- Duralock[™] quick connect system
- · Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- · 360° rotating spout

OPERATION

- · Lever style handle
- · Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the docked or retracted position
- Temperature controlled by 100° arc of handle travel

FLOW

· Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- · Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- · ADA for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original homeowner
- · 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- · Visit www.moen.com/support for complete details and limitations

Specifications



Cia ™


Single Handle High Arc Pulldown Kitchen Faucet

MODELS: 7622 SERIES

NOTE:

THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.



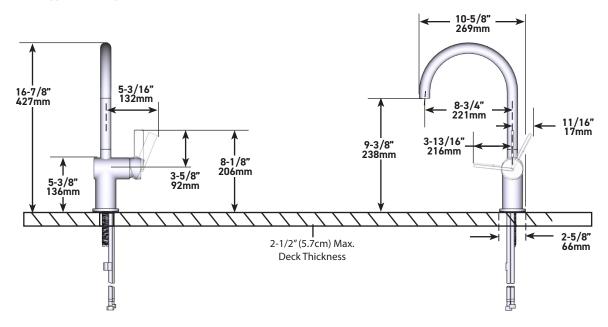

CRITICAL DIMENSIONS DO NOT SCALE