

Dolphin® Flushometer Type II Class A Shock Proof

▶ Code Number

3057051

▶ Description

Exposed Urinal Flushometer. Specifically engineered for salt water and severe water conditions. Meets U.S. Navy Bureau of Ships Specifications.

▶ Specifications

Quiet, Exposed, Chrome Plated Urinal Flushometer with the following features:

- Metal Lever Handle
- ¾" I.P.S. Screwdriver Bak-Chek™ Angle Stop with ½" Inlet Adapter with Vandal Resistant Stop Cap
- Tailpiece
- ¾" Scored Outlet with ½" Offset (hose, clamps, and flush connection not furnished with valve)
- Flushometer does not require water pressure to positively shut off
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.


Variations

□ ½" Sil-braze Inlet Adapter

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories



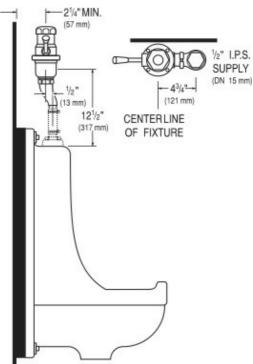

► Compliance & Certifications

Made In The





This space for Architect/Engineer Approval