MOEN®

Specifications

DESCRIPTION

- Designed using ocean recycled plastic
- MagnetixTM technology features an innovative magnetic docking system
- · Includes rainshower and magnetic docking system
- Brass swivel ball assembly
- 1/2" NPT connection

OPERATION

- Infiniti[™] dial allows users to precisely adjust to their preferred balance of force and coverage
- Magnetix showerhead is a snap to clean, easily detaching from the shower arm

FLOW

- Flowrate for non-EP models are limited to 2.5 gpm (9.5 L/min) max
- Flowrate for EP suffix models are limited to 1.75 gpm (6.6 L/min) max

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1and all applicable specifications referenced therein
- EP suffix models are third party certified to WaterSense
- EP suffix models are compliant with California water efficiency regulations

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 5 year limited warranty when used in a commercial installation
- 10 year limited warranty when used in a multifamily installation
- Visit www.moen.com/support for complete details and limitations





VersoTM

Rainshower with Infiniti™ dial and Magnetix™ Docking

MODELS: 220R3 series 220R3EP series



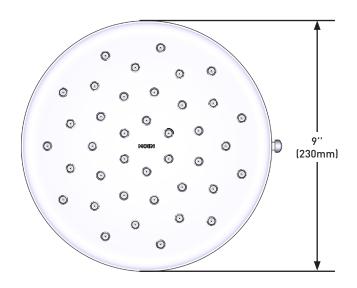



CRITICAL DIMENSIONS DO NOT SCALE