

► **Code Number**

3375011

► **Description**



Electronically operated solenoid w/integral filter used to supply hot or cold water to lavatories or pre-mixed water to a shower. For use with any MICRO Plumb® controller.

► **Specifications**

- 24 VAC – 50/60 Hz operating voltage
- Current: In Rush 12 VA (500 mA)
- Holding 4.63 VA (193 mA)
- Power Consumption: 7 WATTS
- 160°F maximum water temperature
- Brass body w/integral 'Y' strainer (80 mesh)
- .375-18 NPTF Thread at inlet and outlet
- Stainless steel valve seat
- Includes 15' cable w/ 6 position, 4 pin RJ-11 connector

► **Accessories (Sold Separately)**

- ETF-1003-240 20' Single wire extension Cord Kit
- MCR-29-A 3/8 NPTM to 3/8 O.D. tube adapter kit
- MCR-86-200 200' 3/8 O.D. nylon tubing
- NOTE: Solenoid cable length can be increased to a maximum overall length of 200 feet using MICRO Plumb® extension cords.
- ETF-1003-600 50' Single Wire Extension Cord Kit

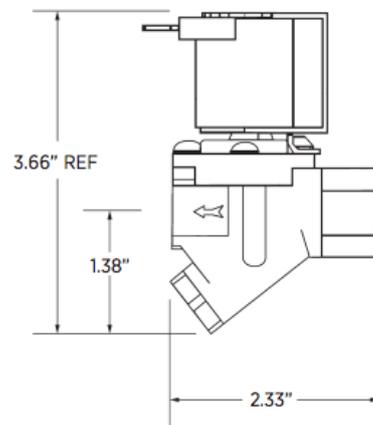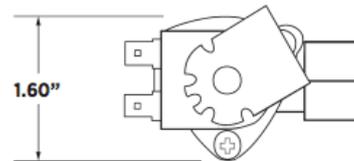

This space for Architect/Engineer Approval