



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes showerhead, arm, flange and diverter spout

OPERATION

- Lever style handle with temperature indicator on the escutcheon, pull-on/push-off operation
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3.6^{\circ}\text{F}$ ($\pm 2^{\circ}\text{C}$)

FLOW

- Showerhead limited to 2.5 gpm (9.5 L/min) at 80 psi
- NH Suffix models contain no showerhead

CARTRIDGE

- 1225® cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations


STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, ASSE 1016 and all applicable requirements referenced therein

- **ADA**  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

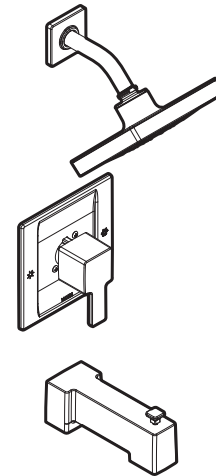

90 DEGREE™ MOENTROL® Single-Handle Tub/Shower Trim Only

Model: TS3711 series - valve trim only
TS3715 series - shower trim only
TS3713 series - tub/shower trim only

Valves: 63100, 3500 series

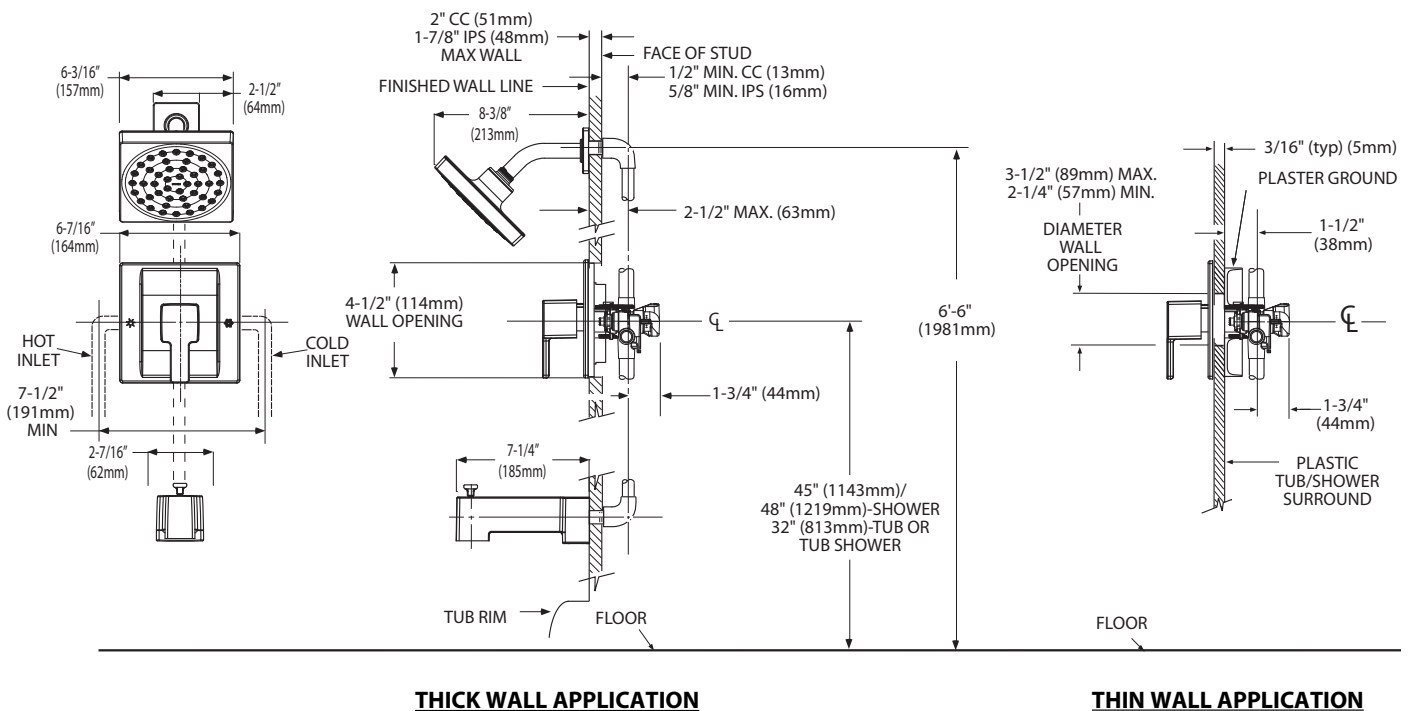

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com