

Product description

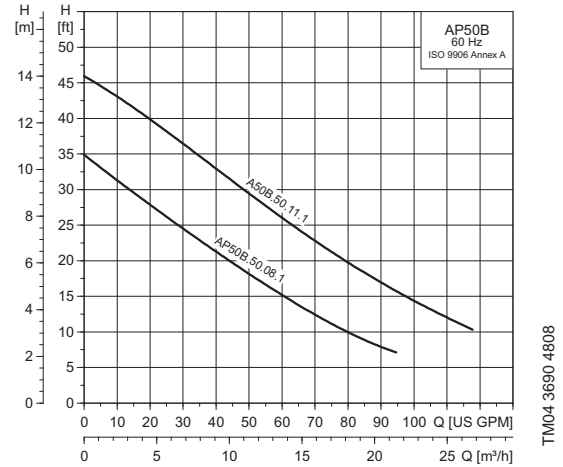


Fig. 31 Duolift System

Grundfos Duolift Systems are suitable for the collection and pumping of wastewater below sewer level from cellars/basements of private homes (shower, bath, washing machine, and toilets), hospitals, industries, hotels, restaurants, etc.)

Duolift Systems are supplied with two Grundfos AP 50B pumps. For further information about AP 50B pumps, see *Unilift AP50B* on page 40.

Pump performance



Technical data

Product number	Pump type	Hp	Ph	Voltage [V]	Run	Start	Cable	Cover
96966621	AP50B.50.08	1	1	115	—	—	25 ft	One piece
96966622	AP50B.50.08	1	1	230	6.4	29	25 ft	One piece
96966623	AP50B.50.11	1 1/2	1	230	8.4	35	25 ft	One piece

Basin

Dimensions [in]	Operating capacity [gal]	Inlet [in]	Discharge [in]	Vent [in]	Solids [in]	Panel type	Approx. shipping weight [lbs]
30 x 36	63	4	2	2	2	Duplex	120

Notes:

- Duolift systems are not designed for traffic loads.
- Contact Grundfos Partner Services for availability of 115V Duolift.