



## Broan Elite RM52000

Rangemaster

**A sleek look that's simply elegant.**

Combines graceful curves and traditional European styling.



## Broan Elite RM51000

Rangemaster

**Hand-rolled. European craftsmanship.**

Sleek, graceful curves engineered to meet the requirements of today's appliances and kitchens.



## Broan Elite RM50000


Rangemaster

**Beautiful, yet attainable.**

European design with tremendous value to meet the requirements of today's conventional appliance and kitchen styles.

- Multi-speed slide control.
- 370 CFM internal blower (<300 CFM with ARP6).
- Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.
- Two 20-watt halogen lamps included (one level).
- Dishwasher-safe aluminum filters feature a quick-release latch and professional-style appearance.
- Ducted/non-ducted telescopic flue accommodates ceiling heights from 8 to 9 feet. Extension flues for

- higher ceilings are also available for ducted and non-ducted applications.\*
- Requires separate purchase of a non-ducted kit (RRK51) for indoor exhaust recirculation.
- Install hood so that the bottom of the unit is 24 to 30 inches above the cooking surface. Mounting height is determined by ceiling height.

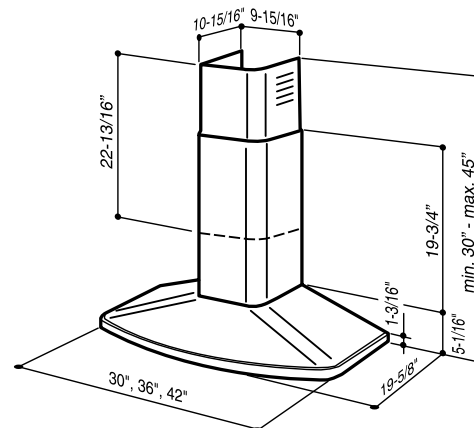

#### Range Hood Specifications

WIDTH	STAINLESS STEEL	VOLTS	AMPS	CFM	SONES	DUCT
30"	RM523004	120	2.6	370**	7.0	6" RD
36"	RM523604	120	2.6	370**	7.0	6" RD
42"	RM524204	120	2.6	370**	7.0	6" RD

#### Optional Accessories

FLUE EXTENSION*	NON-DUCTED FLUE EXTENSION	NON-DUCTED KIT+	NON-DUCTED FILTER	MAKE-UP AIR DAMPER
RFX5204	RFXN5204	RRK51	FILTERSQUARE	MD6TU, MD8TU
RFX5204	RFXN5204	RRK51	FILTERSQUARE	MD6TU, MD8TU
RFX5204	RFXN5204	RRK51	FILTERSQUARE	MD6TU, MD8TU


\* Optional flue extension for 10' ceiling—extensions over 10' have up to a 14-week order time.

\*\*299 CFM max with ARP6 reducer plate option.

+ Includes non-ducted filter.

- Multi-speed slide control.
- 370 CFM internal blower (<300 CFM with ARP6).
- Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.
- Two 20-watt halogen lamps included (one level).
- Dishwasher-safe aluminum filters feature a quick-release latch and professional-style appearance.
- Ducted/non-ducted telescopic flue accommodates ceiling heights from 8 to 9 feet. Extension flues for

- higher ceilings are also available for ducted applications.\*
- Requires separate purchase of a non-ducted kit (RRK51) for indoor exhaust recirculation.
- Install hood so that the bottom of the unit is 24 to 30 inches above the cooking surface. Mounting height is determined by ceiling height.

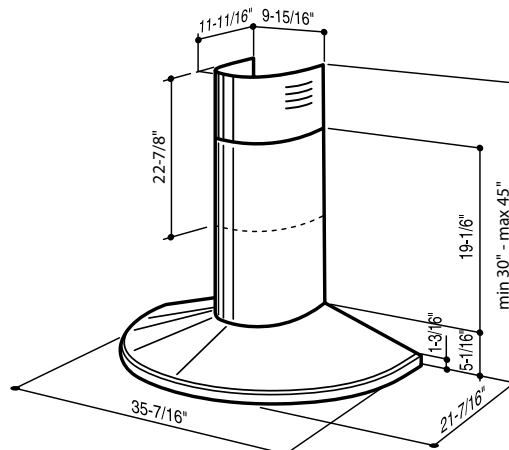

#### Range Hood Specifications

WIDTH	STAINLESS STEEL	VOLTS	AMPS	CFM	SONES	DUCT
35 7/16"	RM519004	120	2.6	370**	7.0	6" RD

#### Optional Accessories

FLUE EXTENSION*	NON-DUCTED KIT+	NON-DUCTED FILTER	MAKE-UP AIR DAMPER
RFX5104	RRK51	FILTERSQUARE	MD6TU, MD8TU


\* Optional flue extension for 10' ceiling—extensions over 10' have up to a 14-week order time.

\*\* 299 CFM max with ARP6 reducer plate option.

+ Includes non-ducted filter.

- Multi-speed slide control and integrated dual light assembly.
- 290 CFM internal blower.
- Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.
- Dual 40-watt incandescent lamps included (one level).
- Dishwasher-safe aluminum filter features a quick-release latch and professional style appearance.
- Includes non-ducted kit and charcoal filter for indoor exhaust recirculation.
- Ducted/non-ducted telescopic

- flue accommodates ceiling heights from 8 to 9 feet. Extension flues for higher ceilings are also available.\*
- Non-ducted flue extensions available in stainless steel only.+
- Install hood so that the bottom of the unit is 24 to 30 inches above the cooking surface. Mounting height is determined by ceiling height.
- ENERGY STAR® version on pg 20–21

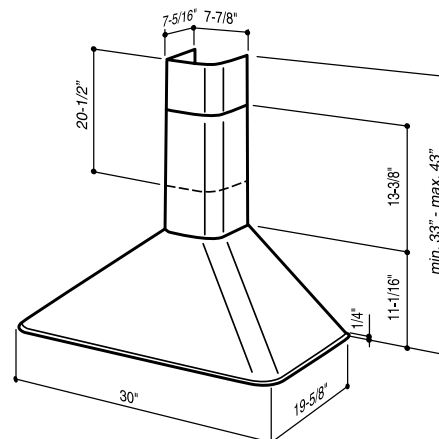

#### Range Hood Specifications

WIDTH	STAINLESS STEEL	WHITE	BLACK	VOLTS	AMPS	CFM	SONES	DUCT
30"	RM503004	RM503001	RM503023	120	2.9	290	6.5	6" RD
35 7/16"	RM503604	RM503601	RM503623	120	2.9	290	6.5	6" RD

#### Optional Accessories

FLUE EXTENSION*	NON-DUCTED FLUE EXTENSION AVAILABLE IN STAINLESS STEEL ONLY	NON-DUCTED FILTER
RFX5004	RFXN5004	FILTEREB40
RFX5004	RFXN5004	FILTEREB40

\* Optional flue extension for 10' ceiling—extensions over 10' have up to a 14-week order time.

+ Includes non-ducted filter.