

Wall Mount Vandal Resistant ADA Cooler with Louver Screens Nonfiltered Non-refrigerated Stainless

Model VRCSCDS

PRODUCT SPECIFICATIONS

Wall Mount Vandal Resistant ADA Cooler with Louver Screens Nonfiltered Non-refrigerated Stainless. Features shall include Louver Screens, Vandal Resistant. Furnished with Vandal Resistant bubbler. Mechanical Front Bubbler Button activation. Product shall be Wall Mount (On Wall), for Indoor + Outdoor applications, serving 1 station(s).

| Special Features: | Louver Screens, Vandal Resistant | |
|--------------------------|----------------------------------|--|
| Finish: | Stainless Steel | |
| Power: | No Electrical Required | |
| Bubbler Style: | Vandal Resistant | |
| Activation by: | Mechanical Front Bubbler Button | |
| Mounting Type: | Wall Mount (On Wall) | |
| Chilling Capacity: | Non-refrigerated | |
| Dimensions (L x W x H): | 18" x 18-1/2" x 20-5/8" | |
| Approx. Shipping Weight: | 36 lbs. | |
| Installation Location: | Indoor + Outdoor | |
| No. of Stations Served: | 1 | |

**When used in non-temperature controlled environments, unit(s) must be adequately winterized and/or protected from extreme heat to prevent damage where climates dictate.

- Mechanically-Activated unit continues to supply water in event of service disruptions.
- Screens provided behind louvers to further protect internal components.



Included with Product: Water Cooler Ships in one box.

A Century of Tradition and Quality.
For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.



PRODUCT COMPLIANCE

ADA & ICC A117.1 ASME A112.19.3/CSA B45.4 Buy American Act NSF/ANSI 61 (Q≤1) & 372 (lead free)





Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.

Installation Instructions (PDF) - 98956C

Water Systems are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty. Warranty (PDF)

| PART: | QTY: |
|-----------|------|
| PROJECT: | |
| | |
| DATE: | |
| NOTES: | |
| APPROVAL: | |

In keeping with our policy of continuing product improvement, reserves the right to change product specifications without notice. Please visit for the most current version of product specification sheets. This specification describes product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



Wall Mount Vandal Resistant ADA Cooler with Louver Screens Nonfiltered Non-refrigerated Stainless Model VRCSCDS

| Optional Accessories | | |
|----------------------|---|---|
| EWF172 | Universal Filtration Kit (1500-Gallon) Spec Sheet (PDF) | |
| MLP100 | In-wall Carrier for Single-station On-wall Bottle Fillers Coolers & Fountains Spec Sheet (PDF) | H |
| <u>98324C</u> | Cane Apron for HAC HVR EMABF & VRC Models (Stainless) Spec Sheet (PDF) | |
| 98481C | Bubbler Kit Water-Efficient Vandal-Resistant Spec Sheet (PDF) | |

In keeping with our policy of continuing product improvement, reserves the right to change product specifications without notice. Please visit for the most current version of product specification sheets. This specification describes product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Wall Mount Vandal Resistant ADA Cooler with Louver Screens Nonfiltered Non-refrigerated Stainless

Model VRCSCDS

IMPORTANT! INSTALLER PLEASE NOTE:


This water cooler has been designed and built to provide water to the user which has not been altered by materials in the cooler waterways.


The grounding of electrical equipment such as telephone, computers, etc to water lines is a common procedure. This grounding may be in the building or occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which creates a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by installing the cooler using the proper materials as shown below.

NOTICE

The water cooler must be connected to the water supply using a dielectric coupling. The cooler is furnished with a non-metallic strainer which meets this requirement. The drain trap which is provided by the installer should also be plastic to completely isolate the cooler from the building plumbing system.

OPERATION OF QUICK CONNECT FITTINGS



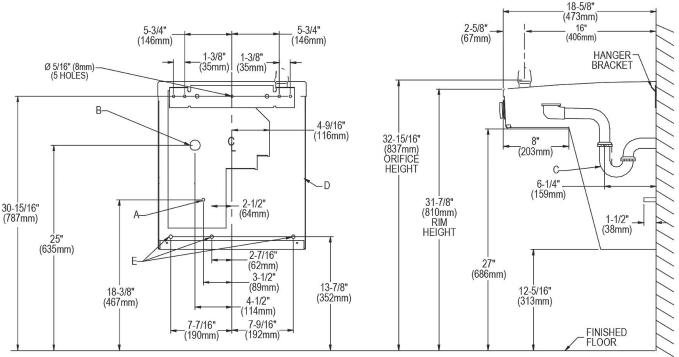

REDUCE HEIGHT BY 3" FOR INSTALLATION OF CHILDREN'S ADA COOLER

LEGEND

- A = Recommended water supply location. Shut off valve (not furnished) to accept 3/8" O.D. unplated copper tube. 3" (76mm) maximum out from wall.
- B = Recommended location for waste outlet 1-1/4" O.D. drain. Drain stub 2" (51mm) out from wall.
- C = 1-1/4" Trap not furnished.
- D = Insure proper ventilation by maintaining 6" (152mm) (MIN.) clearance from cabinet louvers to wall.
- E = 7/16" Bolt holes for fastening unit to wall.

In keeping with our policy of continuing product improvement, reserves the right to change product specifications without notice. Please visit for the most current version of product specification sheets. This specification describes product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.