RAIN BIRD®

XF Insert Fittings
17mm

Larger flange provides greater leverage when gripping

Tube stop

Improved barb angle for easier tube installation

2nd barb for additional dripline grip

Longer lead in allows faster tube insertion
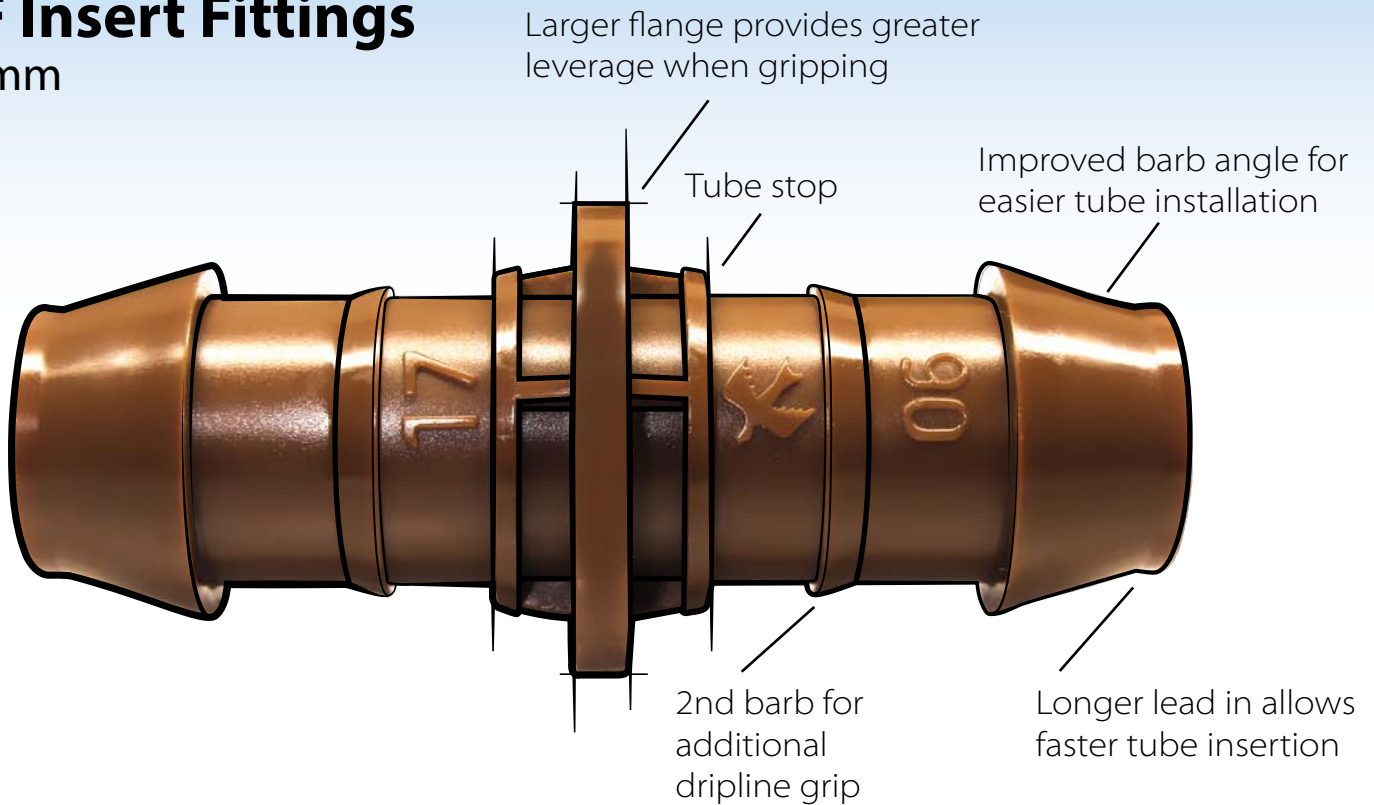
Save your hands.

Rain Bird's redesigned 17mm insert fittings can now be installed with 20% less force. Pair that with our new XF Insertion Tool and your hands will thank you.

Durable, Reliable, & Non-Obtrusive. Rain Bird's NEW 17mm Insert Fittings

- **Complete line of 17mm insert fittings to simplify installation of XF Series Dripline**

- **High quality barbs grab tubing for a secure fit**

- **Unique barb design to reduce insertion force and still retain a secure fit**

- **Non-Obtrusive colored fittings to compliment natural earth tones.**

Available Accessory: XF Insertion Tool

The XF Insertion Tool reduces the effort required to insert the fittings into the tube by 50%.

Model#
FITINS-TOOL

Works with the following XF Fittings:

- XFF-COUP
- XFF-TEE
- XFF-ELBOW

	MODEL	DESCRIPTION	APPLICATION
	XFF-COUP	**Barb coupling 17 x 17mm** Operating pressure: 0 to 50 psi (0,0 to 3,5 bar)	For 2-way joints
	XFF-ELBOW	**Barb elbow 17 x 17mm** Operating pressure: 0 to 50 psi (0,0 to 3,5 bar)	Elbow joint connection
	XFF-TEE	**Barb tee 17 x 17 x 17mm** Operating pressure: 0 to 50 psi (0,0 to 3,5 bar)	For 3-way joints
	XFF-MA-050	**Barb male adapter 17mm x ½" MPT** Operating pressure: 0 to 50 psi (0,0 to 3,5 bar)	For transition from ½" pipe to XF series dripline
	XFF-MA-075	**Barb male adapter 17mm x ¾"MPT** Operating pressure: 0 to 50 psi (0,0 to 3,5 bar)	For transition from ¾" pipe to XF series dripline
	XFF-TMA-050	**Tee male adapter 17mm x ½" MPT x 17mm** Operating pressure: 0 to 50 psi (0,0 to 3,5 bar)	For a 3-way joint connection to ½" pipe

For more information on XF Fittings, visit: www.rainbird.com/DripDistribution

D40217