


Selkirk® gives you the safe, efficient, and cost-effective venting system that’s engineered precisely for pellet burning stoves. Model VP Pellet Pipe has been tested and listed by Underwriters’ Laboratories, Inc., in accordance with UL-641, CAN/ULC-S609 Standard for Low Temperature Venting Systems, as well as the applicable requirements from UL-103 Standard for Residential Type and Building Heating Appliance Chimneys. VP Pellet Pipe, when installed according to Selkirk’s installation instructions, complies with National Safety Standards, such as NFPA -211 in the US and CSA/B365 in Canada.

The system is rated for flue temperatures up to 570°F.

- Available in 3" and 4" diameters.
 - Full line of fittings and full range of pipe lengths increase installation flexibility.
 - Proven coupling joint connects in seconds to assure joint integrity.
 - Gasketed joint design.
 - Painted pipe lengths available for interior use.
 - Double wall design with ¼" airspace.
- Inner wall 304 stainless steel, outer wall paintable galvanized.
 - Rolled-over male end eliminates sharp edges.
 - 1" clearance to combustibles. Clearances in Canada is 3".
 - Removable tee cap for inspection and cleaning.
 - Internal spacing bead assures uniform insulating airspace between pipe walls.

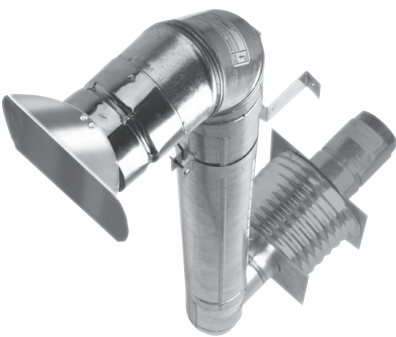

Pellet Pipe Lengths

VENT PIPE AND ADJUSTABLE PIPE LENGTHS

VP

VP-EZADJ

I.D.: 3", 4"

Lengths: 6", 1', 2', 3', 5'

VP pipe & fittings overlap 1-½" when joined hence, net assembled length is 1-½" less than listed lengths (3' and 5' lengths available in black)

I.D.: 3", 4"

Max. installed length 10-½"

Adjusts to 8" shorter (Black or Unpainted)

Pellet Pipe Lengths

- Available in lengths of 5', 3', 2', 12" and 6".
- Available in galvanized and black.

Adjustable Pipe Length

- Adjustable length eliminates the need to cut pipe.
- Adjustable length simply slides over another VP length.

Item Description	3"Diameter		4"Diameter	
	Product No.	Part No.	Product No.	Part No.
5' Length – Black	243060B	3VP-60B	244060B	4VP-60B
5' Length	243060	3VP-60	244060	4VP-60
3' Length – Black	243036B	3VP-36B	244036B	4VP-36B
3' Length	243036	3VP-36	244036	4VP-36
2' Length	243024	3VP-24	244024	4VP-24
12" Length	243012	3VP-12	244012	4VP-12
6" Length	243006	3VP-6	244006	4VP-6
12" EZ Adj. – Black	243086B	3VP-EZAJ12B	244086B	4VP-EZAJ12B
12" EZ Adj.	243086	3VP-EZAJ12	244086	4VP-EZAJ12