Jaws Open

Jaws Open

\*Throat Depth


## Utility Workshop Vises (Swivel Base)

Heavy-duty design strengthens this ideal utility workshop vise. Cast vises with pipe jaws, anvil and horn feature a swivel base with positive locking in addition to replaceable, hardened steel, serrated jaw facings for user convenience.

Catalog No.	Item Code	Throat in	Depth*	Jaw I	Width mm	Jaws in	Open <sup>Ω</sup> mm	Wei Ibs	ight kg
241/2C	01522	2 1/2	64	4 1/2	115	4	102	18.0	8.2
251/2C	01532	3	76	5 1/2	140	5	127	27.0	12.3
261/2C	01542	3 3/8	86	6 1/2	165	6	152	41.0	18.6
26B	01545	4 3/16	120	6	150	6	152	60.0	27.3

<sup>\*</sup>See illustration

ΩSee illustration



261/2C

## Mid-Line Vises

A vise of strength and price between the Machinist vise and Utility vise. Design features a machined work surface. The main screw and nut are totally enclosed to keep out dirt and eliminate wear. Vise has <u>replaceable</u>, <u>hardened steel jaw facings</u> and <u>pipe jaws</u>, along with two swivel-base side clamps for a positive lock.

Cata	alog	Item Code	Throat Depth*		Jaw	Width	Jaws	Open <sup>Ω</sup>	Pipe Capacity	Weight	
N	No.		in	mm	in	mm	in	mm	In-Nom.	lbs	kg
704	1	01385	3.45	88	4	102	4.5	114	1/2 - 2	36.0	16.4
705	5	01387	3.75	95	5	127	5.5	140	1/4 - 2 1/2	47.0	21.4
708	3	01389	4.10	104	6	152	5.7	146	1/4 - 3 1/2	61.0	27.7


\*See illustration ΩSee illustration

Swivel-base models feature positive-locking base.



Vises have enclosed screw assembly for all-weather protection.

Replaceable

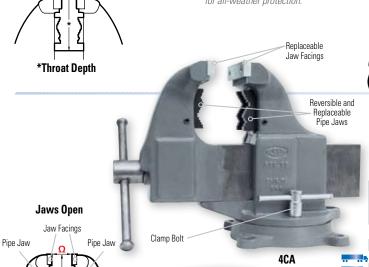

Swivel-base models

feature positive-locking

base.

## **Combination Bench & Pipe Vises** (Swivel Base)

Designed to provide decades of service, these cast vises carry Reed's lifetime warranty. Steel <a href="mailto:pie\_jaws">pie\_jaws</a> made of heat-treated, hardened steel are <a href="reversible\_and\_replaceable">reversible\_and\_replaceable</a>, and <a href="jaws">jaws</a> facings are replaceable</a>, <a href="to:too.">too.</a> This yields long jaw life. Vises are designed with maximum throat depth for greater clamping action to hold large parts. Forged steel, geared clamp bolt on swivel base maintains positive lock to avoid slippage under heavy pressure.

	Catalog No.	Item Code	Throat Depth*		Jaw Width		Jaws Open <sup>Ω</sup>		Pipe Capacity	Weight	
			in	mm	in	mm	in	mm	In-Nom.	lbs	kg
	1CA	01350	4	102	3 1/2	89	4	102	1/8 - 2 1/2	35.0	15.9
	2CA	01360	5 3/8	137	4 1/2	114	5	127	1/8 - 3 1/2	60.0	27.3
ļ.	3CA	01370	6 1/4	159	5	127	6	152	1/8 - 4 1/2	95.0	43.2
	4CA	01380	7 1/8	181	6	152	10	254	1/8 - 6	157.0	71.4

\*See illustration •See illustration



